


Please Note*: Hegner's new XM18-265SN switches have two tabs and two screws, while some older machines used switches with only tabs. Naturally, customers try to use the two tabs to connect the new switch (or sometimes the two screws), but this will not work. Instead, you need to use one tab plus the screw connection on the same side of the switch (if your wiring has two clips this will require you to cut off one of the clips and strip the wire end to attach it to the screw).

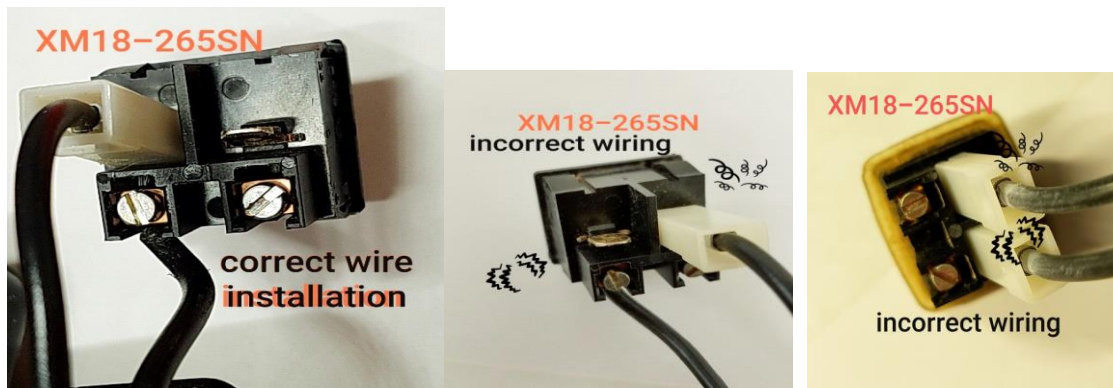

*(Left) For a single speed motor, follow the wiring as it was previously attached, to the new switch.

If you have any questions, or if you need saw blades, parts or any other assistance, please visit our website at www.advmachinery.com ,

call Advanced Machinery at 800-727-6553 (10-3 Eastern Time, M-F),

or contact us by mail at Advanced Machinery Sales, Inc.,

2 McCullough Dr, Ste 1, New Castle, DE 19720.