


Dual Monitor Desk Stand

Instruction Manual



SKU: STAND-V102K

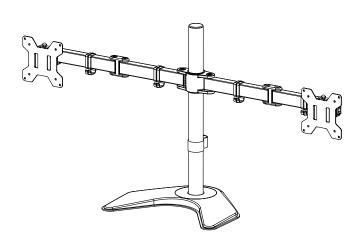


Scan the QR code with your mobile device or follow the link for helpful videos and specifications related to this product.

https://vivo-us.com/products/stand-v102k

GET IN TOUCH | Monday-Friday from 7:00am-7:00pm CST







www.vivo-us.com Chat live with an agent!



309-278-5303

№ WARNING!

If you do not understand these directions, or if you have any doubts about the safety of the installation, please call a qualified technician. Check carefully to make sure there are no missing or defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity. We cannot be liable for damage or injury caused by improper mounting, incorrect assembly or inappropriate use.



TIPOVER WARNING

SERIOUS OR FATAL CRUSHING INJURIES CAN OCCUR FROM TIPOVER. TO HELP PREVENT TIPOVER:


- TO PREVENT TIPPING, PLEASE BE CAREFUL NOT TO EXTEND THE ARMS TOO FAR FORWARD OR BACKWARD.
- NEVER ALLOW CHILDREN TO CLIMB, STAND, HANG, OR PLAY ON ANY PART OF MONITOR OR STAND.
- USE TIPOVER RESTRAINT OR ANCHOR STAND TO WALL

USE OF TIPOVER RESTRAINTS MAY ONLY REDUCE, BUT NOT ELIMINATE RISK OF TIPOVER.

∧ w

WARNING: CHOKING HAZARD

SMALL PARTS - NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.

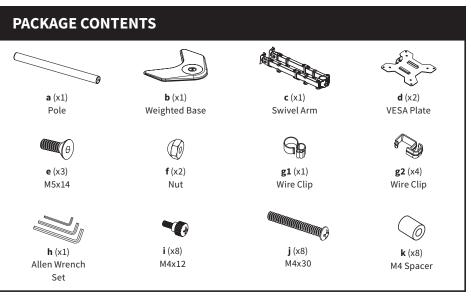

NOTE: SOME HARDWARE INCLUDED MAY NOT BE USED




DO NOT EXCEED WEIGHT CAPACITY.

Failure to do so may result in serious injury.




ASSEMBLY STEPS

STEP 1

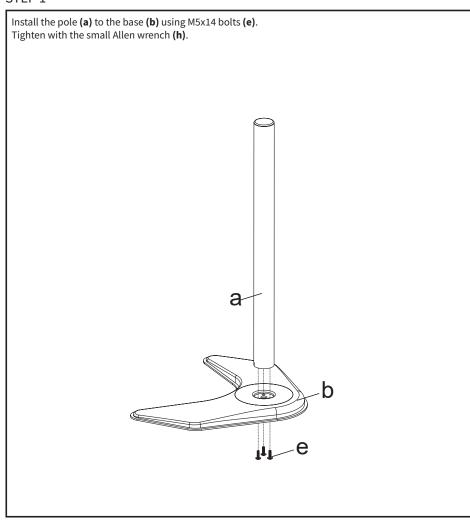

STEP 2

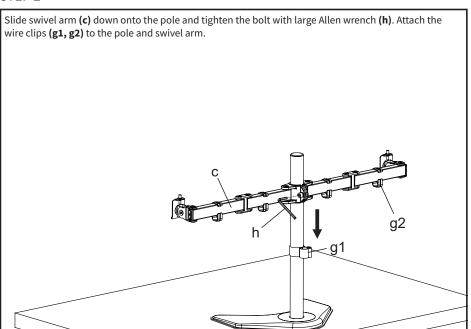


STEP 3

OPTION A: Flat Back Monitor

Attach the VESA plates (d) to the monitors using M4x12 thumb bolts (i).


NOTE: Hand tighten screws to avoid stripping the plastic screw heads.




STEP 3 (Continued)

OPTION B: Curved Back TV

Attach the VESA plates (d) to the monitors using M4 spacers (k) and M4x30 bolts (j). Tighten with a Phillips screwdriver.





STEP 4

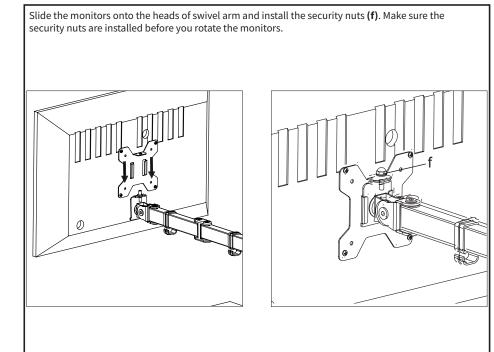


STEP 5


Tighten the bolt on the side of the tilt joint with the medium Allen wrench (h) to fix the tilt angle. To level the monitors, remove the security nut and turn the bolt with the small Allen wrench (h) to raise or lower the monitor. Replace nut after the adjustment.






Use the medium Allen wrench **(h)** to adjust swivel joints if needed. Manage cables and store the Allen wrenches **(h)** in wire clip **(g1)** for future use.





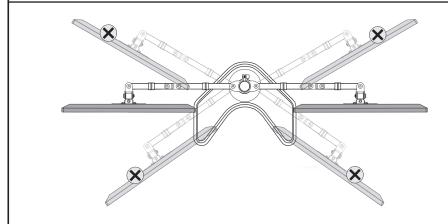

CAUTION: To prevent tipping, please be careful not to extend the arms too far forward or backward.



Open Monday - Friday 7:00am - 7:00pm CST,

our dedicated support team can offer immediate assistance with rapid response times. If any parts are received damaged or defective, please contact us. We are happy to replace parts to ensure you have a fully functioning product.

 \subseteq

help@vivo-us.com

AVG. RESPONSE TIME (within office hrs): 1HR 8M

- 23% within < 15m
- 38% within < 30m
- 61% within < 1hr
- 83% within < 2hr
- 92% within < 3hr



www.vivo-us.com
Chat live with an agent!

AVG. RESOLUTION TIME (within office hrs): < 15 M



309-278-5303

AVG. RESOLUTION TIME (within office hrs): 5M 4S