



WEN LIGHTING  
E-mail: info@wenlighting.com  
www.wenlighting.com

SKU:-

WEN-S-G07-300WCT3A1-BRPA&D5700K-BRONZE-W-PCCELL

Note:

WEN= Company name;

S-G14B = Product series, LED Shoebox Light;

300W = Rating Power;

"B" =LED manufacturer, Lumileds 2835;

"T3" =light distribution type;

"A5"=Version number;

"a" can be any two letters to represent lamp colors , BR=Brown, BH=Black, or Customized;

"b" can be "3RP", "3NP", "5RP", "5NP", "7RP" or "7NP" for Photocontrol type provided or blank for no Photocontrol provided;

"c" can be "10SP" or "20SP" for Surge-protective Device type provided or blank for no Surge-Protective Device provided;

"d" can be "DM", "DP", "Z", "ZM", "ZP" or blank for DC sensor type provided or not;


"e" can be "AM", "DM", "A&D", "YM" or "FM" to represent mounting bracket types;

"W" for wattage adjustable;

"g" can be any two digits to represent CCT, can be 30=3000K, 35=3500K, 40=4000K, 45=4500K, 50=5000K, 57=5700K;



## DIMENSIONS

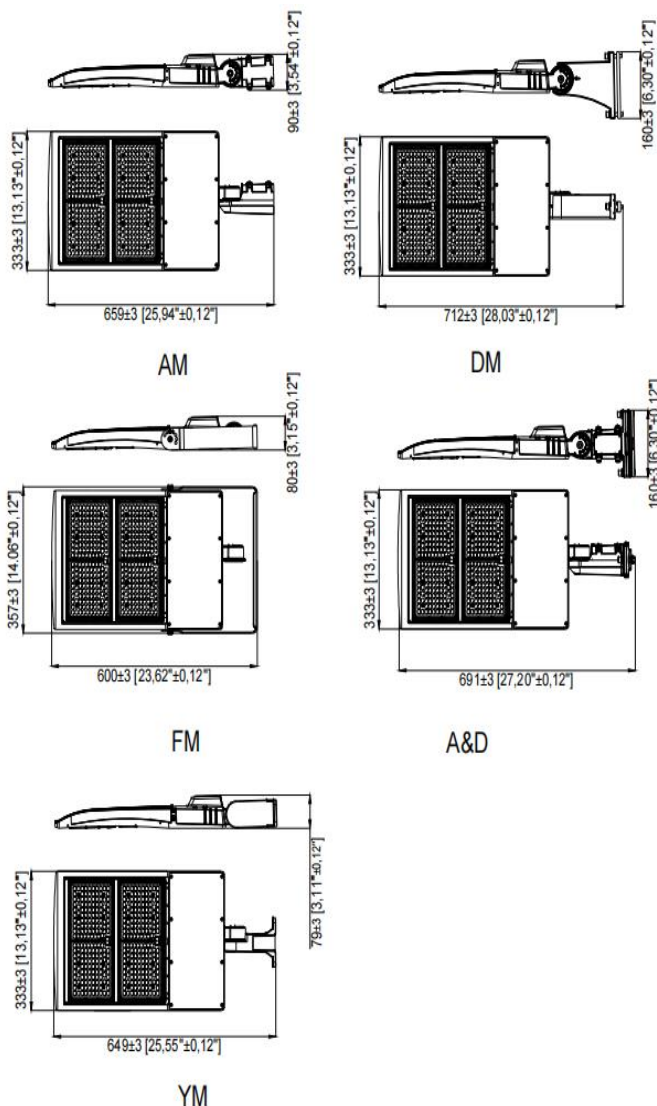

## ADVANTAGE

- UL cUL certificate;
- Lumileds Chip, high CRI;
- Input voltage 120-277 VAC;
- Output constant current lever can be; adjusted through output cable with 0-10V;
- No UV or IR in the beam;
- Easy to install and operate;
- Energy saving, long lifespan;
- Light is soft and uniform, safe to eyes;
- Instant start, NO flickering, NO humming;
- Green and eco-friendly without mercury;

## APPLICATION

- Outdoor basketball court, tennis court;
- Badminton court, the football field;
- The school playground, stadium;
- Community leisure entertainment plaza, road lamp etc;



## SPECIFICATIONS

<b>OPTICAL</b>	Input Power (Tolerance : $\pm 10\%$ )	300W/240W/200W (Wattage Adjustable Range: 25%-100%)					
	Color Temperature	3000K	3500K	4000K	4500K	5000K	<b>5700K</b>
	Lumen (Tolerance : $\pm 10\%$ )	38100 LM	38400 LM	38700 LM	39300 LM	39600 LM	<b>39900 LM</b>
	Efficacy (Tolerance : $\pm 3\%$ )	127 LM/W	128 LM/W	129 LM/W	131 LM/W	132 LM/W	<b>133 LM/W</b>
	CRI	>80					
	Color Consistency	<6 Steps (or <6 SDCM)					
	BUG	B4-U0-G4					
	Distribution Pattern	Type III					
Beam Angle (50%) (Tolerance : $\pm 15\%$ )	155*80 Degree						
<b>ELECTRICAL</b>	Input Voltage and Frequency	120-277 VAC, 50/60Hz					
	PF (Tolerance : -3%)	$\geq 0.9$					
	THD (Tolerance : +5%)	$\leq 20\%$					
	Flicker Percent	<5%					
	Driver Brand	SOSEN					
	Driver Model	SS-320NH-E260BH					
	Driver Surge protection	L/N-PE: 6kV, L-N: 6kV					
	Dimming	0-10V dimming standard					
	Sensor Type	Occupancy Sensor、Exterior Photocell、Integral Sensor Receptacle					
	Optional Accessory	Photocontrol, Surge-protective Device, DC Motion Microwave sensor, DC Motion PIR sensor, photocell receptacle, shorting cap					
<b>MATERIALS</b>	LED Brand	Lumileds					
	LED Type	SMD2835					
	LED QTY	368 PCS					
	Housing	Die-cast aluminum					
	Housing Color	<b>Brown</b> , Black, or Customized					
	Waterproof Rating	WET (IP65)					
<b>OTHERS</b>	Operating Temperature	Without Motion Sensor: -40°C TO 50°C; With Motion Sensor: -30°C TO 50°C					
	Storage Temperature	-40°C TO 85°C					
	Operating Humidity	10% - 95% RH					
	Storage Humidity	10% - 95% RH					
	Warranty	5 years					

## PACKAGE

Bracket Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
AM	750*385*155 mm [29.53*15.16*6.10 inch]	1 PC	6.2Kg [13.64 LBS]	7.5Kg [16.50 LBS]
DM	750*385*155 mm [29.53*15.16*6.10 inch]	1 PC	6.4Kg [14.08 LBS]	7.7Kg [16.94 LBS]
FM	750*385*155 mm [29.53*15.16*6.10 inch]	1 PC	7.4Kg [16.28 LBS]	8.7Kg [19.14 LBS]
YM	750*385*155 mm [29.53*15.16*6.10 inch]	1 PC	6.3Kg [13.86 LBS]	7.6Kg [16.72 LBS]
A&D	750*385*155 mm [29.53*15.16*6.10 inch]	1 PC	6.5Kg [14.30 LBS]	7.8Kg [17.16 LBS]

Tolerance of Carton Size:  $\pm 15$  mm [ $\pm 0.59$  inch], Tolerance of Weight:  $\pm 10\%$ .



## LIGHT DISTRIBUTION TESTING PARAMETERS

### Luminaire Property

---

Luminaire Manufacturer:

Luminaire Category:

Lamp Catalog:

Number of Lamps:

Luminous Length (mm):

Luminous Height (mm):

Current: 2.563 A

Power Factor: 0.994

Luminaire Description:

Lamp Description:

Lumens per Lamp:

Luminous Width (mm):

Voltage: 120.0 V

Power: 305.76 W

### Photometric Results

---

IES Classification: Type III

Total Rated Lamp Lumens: 38690.9 lm

Efficiency: 100%

Upward Ratio: 0%

C0r0 Intensity: 10147.96 cd

Pos of Max. Intensity: H170 V69

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 155.6, 82.4, 108.7, 104.4

Longitudinal Classification: Medium


Measurement Flux: 38690.9 lm

Downward Ratio: 100%


Luminaire Efficacy Rating (LER): 126.59

Max. Intensity: 14624.87 cd

Luminous Intensity Distribution Curve

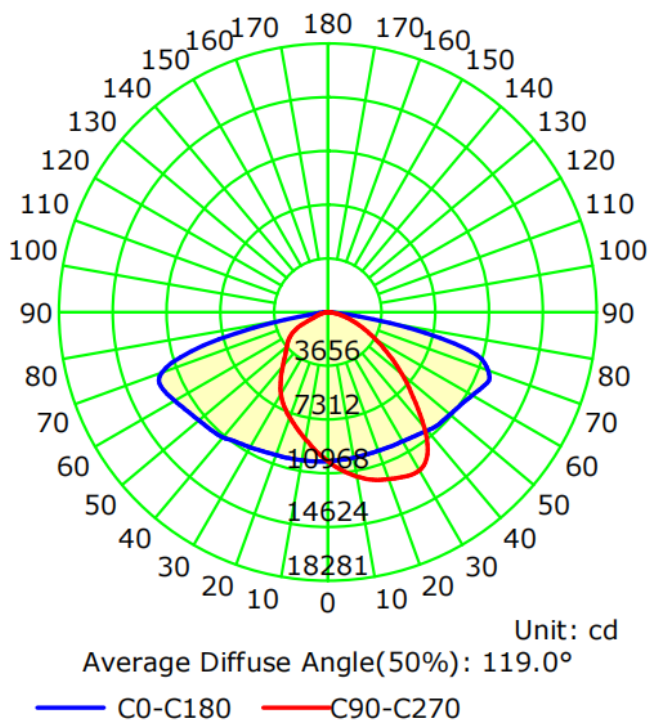

The Average Illuminance Effective Figure

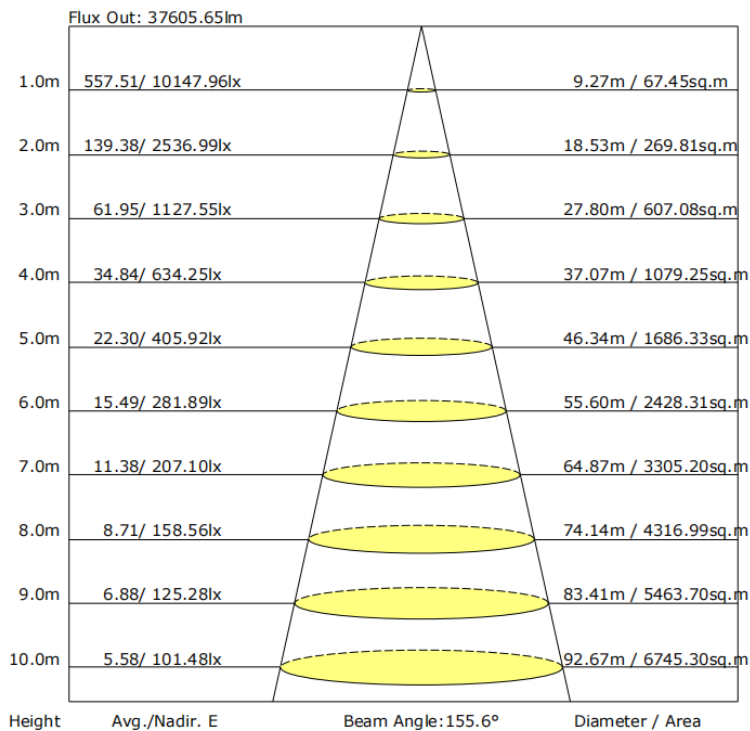

### NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

### TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.