


LED Panel Light



Maximum overall	A	B	C
2*4ft	1213mm	603mm	35mm

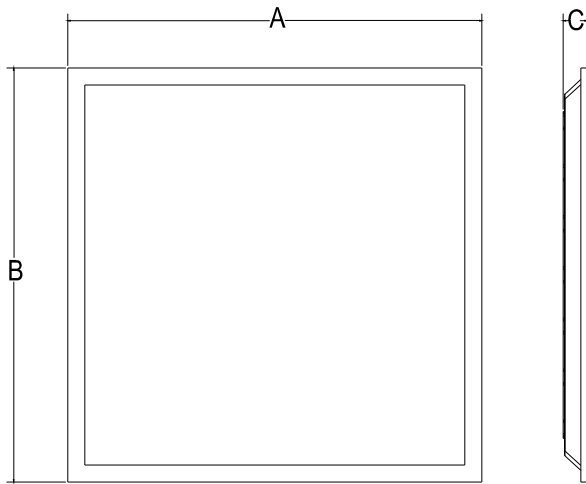



FEATURES

Input voltage:	AC100-277V
Operating frequency:	50/60Hz
Power factor:	> 0.95
Ambient temperature range:	-20°C ~+45°C
Color Temp:	4000K
Dimmable:	3-in-1 dimming
THD:	≤10%
IP Rating:	IP40
CRI:	>Ra80
Beam angle:	120°


- Luminous Flux:120lm/w
- Housing material:6063-T5
- 5 years' warranty
- ETL &DLC Premium

PARAMETER

Length	Product code	Certification	CRI	Wattage	Description Function	Lumens 3000-5000K	Packing/carton	G.W./carton
2*4FT	ZS-BL2*4-F72-CC	ETL/cETLus,DLC	>80	72W	3-in-1 dimming(0-10V)	9000 LM		

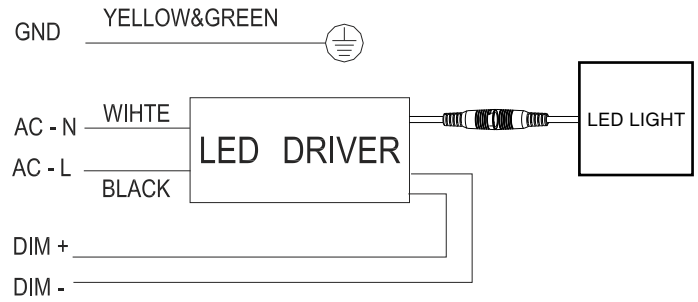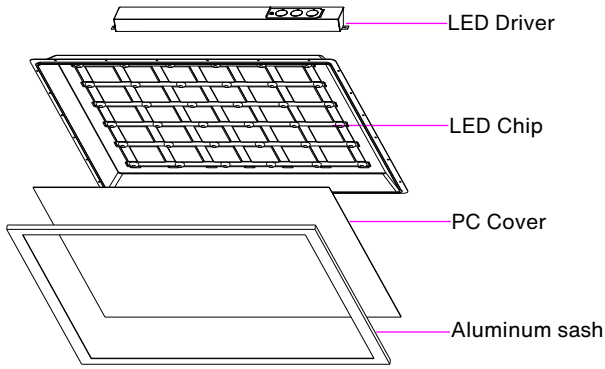

INSTALLATION INSTRUCTION

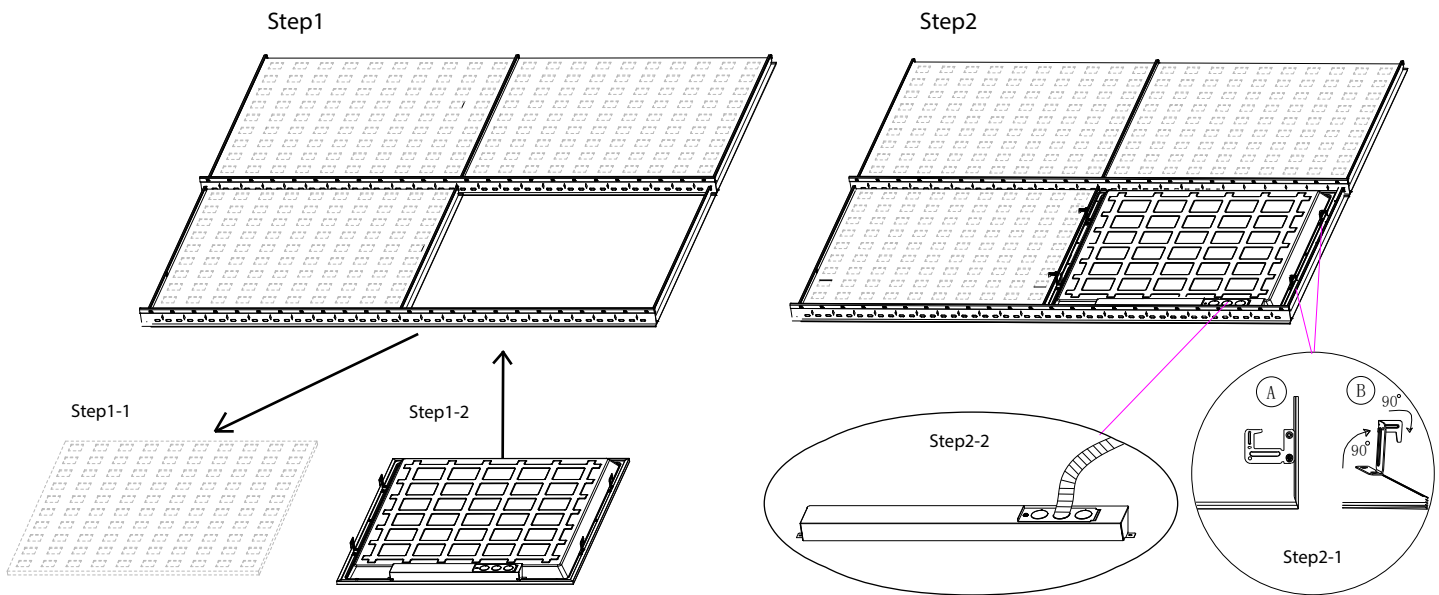

Step 1: Make sure of all the power is off before installing. Remove the one ceiling tile that you need to install light fixture on. Then place the light fixture on the T-bar carefully and make sure it is correctly in place and secure.

Step 2: Lift the 4 buckles on the back of the panel up by 90° then bend the top part of the buckles 90° towards the direction where you can anchor the light fixture to the T-bar.

Step 3: Place the driver on top of the lighting fixture in the back. Connect the cable between the driver and the lighting fixture. Open the driver's junction box and connect the AC wire to the driver correctly (L=black & N=white)

Warning:

Make sure all the power is off before installation.

All the installations are required to be done by professionals.