


LED INTEGRATED TUBE LIGHT



SPECIFICATION



Maximum overall	A	B	C	D
2FT	608mm	598mm	31mm	37mm
4FT	1208mm	1198mm	31mm	37mm
6FT	1808mm	1798mm	31mm	37mm
8FT	2408mm	2398mm	31mm	37mm

FEATURES

Input voltage: AC100-277V

Operating frequency: 50/60Hz

Power factor: ≥ 0.90

Ambient temperature range: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$

Color Temp: 3000K~6500K

THD: $< 20\%$

IP Rating: IP40

CRI: $> 80\text{Ra}$

Beam angle: 180°

Cover: Clear, Frosted, Stripy

CERTIFICATION



- Luminous Flux: $> 120\text{lm/w}$
- Suitable for Damp Location
- Suitable to use in ETL & DLC approved enclosed fixtures
- 5 years' warranty



PARAMETER

Length (ft)	Product code	Certification	CRI	Wattage	Lumens 3000-5000K	Packing/carton	Weight/carton
2ft	WEN-T8Y0610T	ETL/cETLus, DLC42	> 80	10W	1200 lm	650×230×160mm 20pieces 1X40HQ Loading=57,600pcs	4.5kg
4ft	WEN-T8Y1222T WEN-T8Y1222R	ETL/cETLus, DLC42	> 80	22W	2640 lm	1250×230×160mm 20pieces 1X40HQ Loading=28,800pcs	8.5kg
8ft	WEN-T8Y2460X	ETL/cETLus	> 80	60W	7200 lm	2450×230×160mm 20pieces 1X40HQ Loading=12,800pcs	15kg
4ft	WEN-T8W1222T	ETL/cETLus, DLC42	> 80	22W	2640 lm	1250×230×160mm 20pieces 1X40HQ Loading=28,800pcs	9.6kg
6ft	WEN-T8W1836T	ETL/cETLus, DLC42	> 80	36W	4320 lm	1850×230×160mm 20pieces 1X40HQ Loading=19,000pcs	14.5kg
8ft	WEN-T8W2460T	ETL/cETLus, DLC42	> 80	60W	7200 lm	2450×230×160mm 20pieces 1X40HQ Loading=12,800pcs	17kg


MOUNTING GUIDES

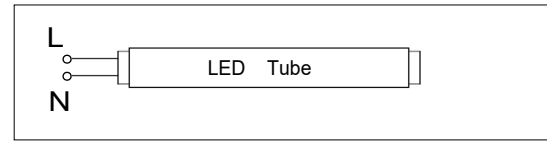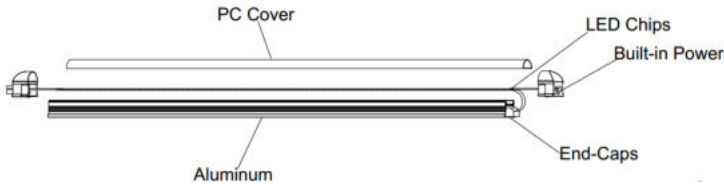


Electric Shock Attention

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.


STEP1. PLACE CLIP KITS AND SCREWS CORRECTLY

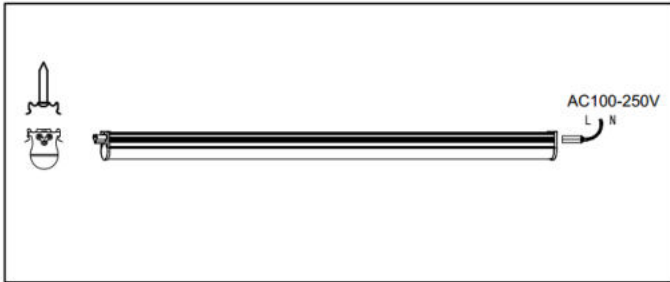


STEP2. FIX THE LED TUBE TO THE CEILING OR WALL

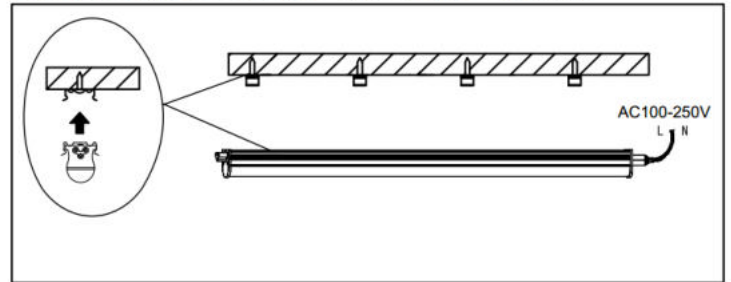

STEP3. CONNECT THE POWER CORD TO THE TUBE

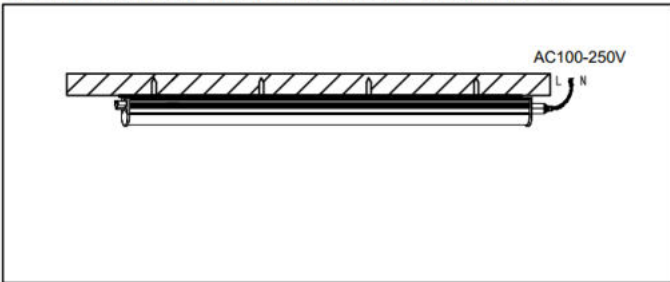

STEP4. CONNECT BY LINKABLE CONNECTOR

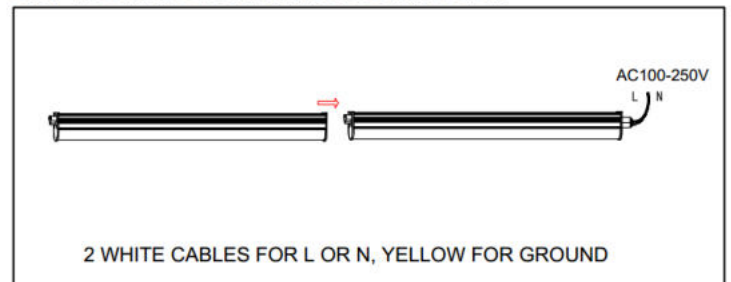

CAUTION: THE INTEGRATED TUBES CAN NOT BE CONNECTED MORE THAN TOTAL PCS



WARNING:

1. DISCONNECT POWER BEFORE INSTALLATION, MUST OPERATED BY ELECTRICIAN
2. TAKE OUT THE TUBE. BEFORE INSTALLATION PLEASE CHECK IF THERE IS ANY UNSATISFACTORY CONDITION OF THE TUBE, SUCH AS WHETHER THE APPEARANCE IS DAMAGED OR DEFORMED, OR THE ACCESSORIES ARE COMPLETE OR NOT.
3. PLEASE USE IT UNDER CORRECT INPUT POWER RANGE
4. THIS TUBE IS NON-DIMMABLE
5. NOT FOR OUTDOOR OR SOME WHERE BE EXPOSED TO RAIN(WATERPROOF TYPE AVAILABLE)
6. IF THE LIGHTS DON'T WORK PROPERLY, PLEASE CHECK THE CONNECTIONS AFTER TURNING OFF THE POWER
7. USE UL APPROVED 3-PIN PLUG.