


WHEEL BALANCING WEIGHT PLACEMENTS

AUDI RS3 (8V) & TTRS (8S) WITH 18" NEUSPEED WHEELS

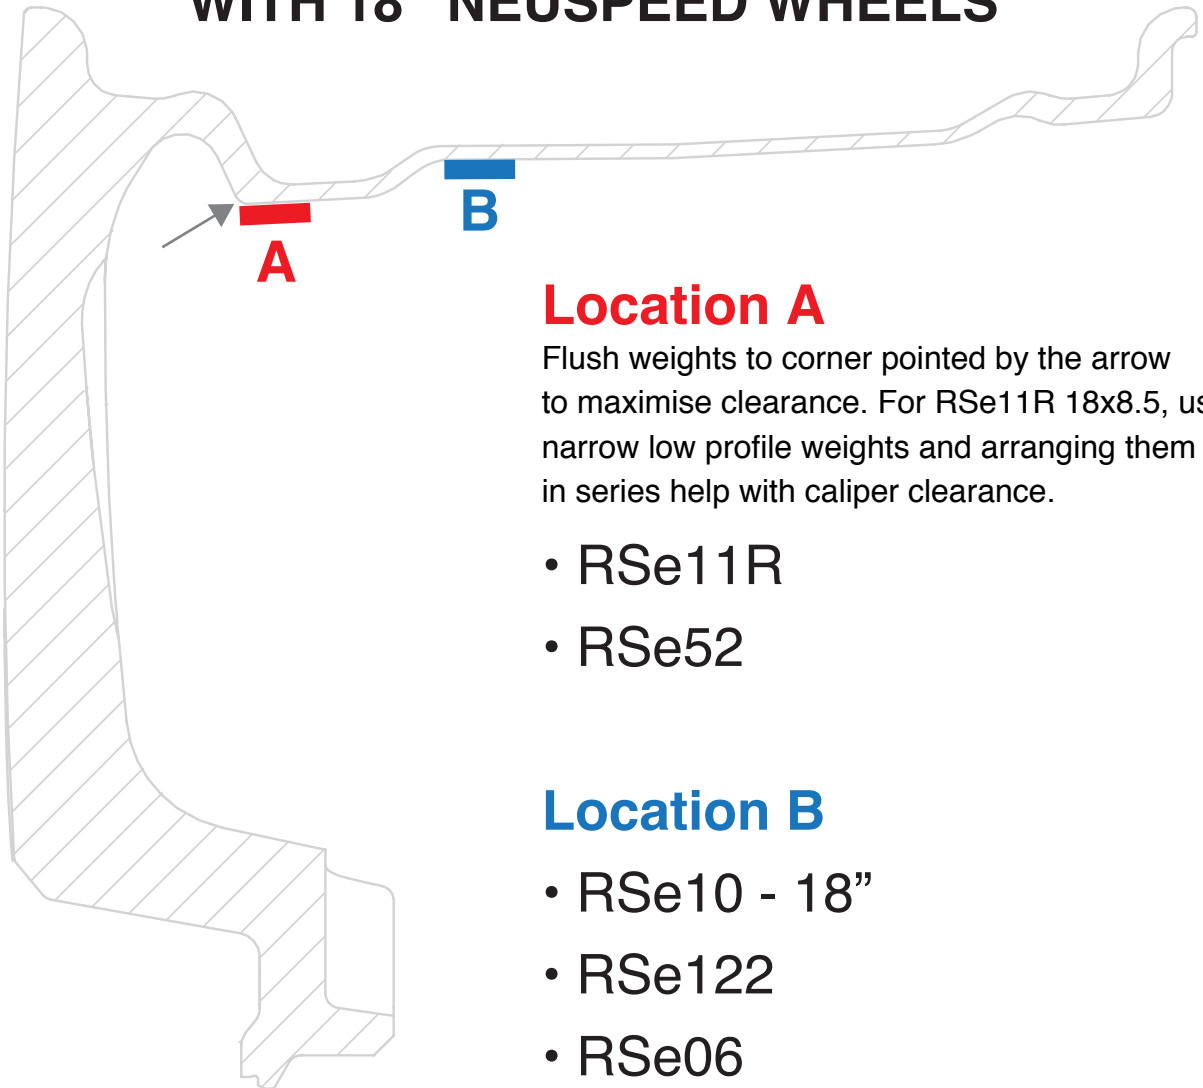

Location A

Flush weights to corner pointed by the arrow to maximise clearance. For RSe11R 18x8.5, using narrow low profile weights and arranging them in series help with caliper clearance.

- RSe11R
- RSe52

Location B

- RSe10 - 18"
- RSe122
- RSe06

NOTE:

Low profile balancing weights are required with typical thickness around 4mm (1/4 oz.).

19 & 20 inch wheels do not have tight caliper clearance. Weights can be applied to the typical locations around location A.

FOR QUESTIONS PLEASE CALL 805.388.7171 OR
EMAIL US AT WHEELS@NEUSPEEDWHEELS.COM