
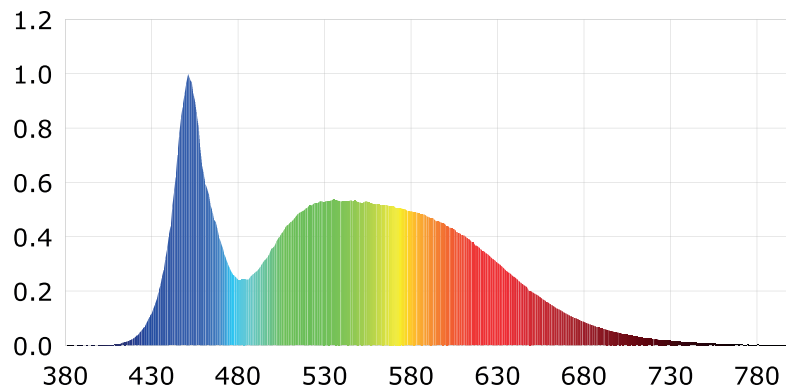


Características

Aplicación Punta Poste
Material FE
Terminado Gris
Indice de Protección [IP] IP65
Dimensiones mm 450*523 mm
Lúmenes 6,000 Lm
Temperatura 6500k

Parámetros Eléctricos

Tensión Nominal [V~] 100 - 277V~
Consumo de Potencia [W] 80W
Frecuencia Nominal [Hz] 50/60Hz
Consumo de Corriente [A] 1.25A
Temperatura de Operación 0 - 40 °C

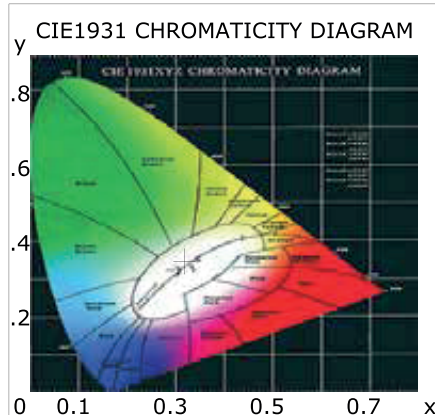

Product Information

Product Type: n LKPT60W
Product Spec: 60W

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3188$ $y=0.3390$ $u(u')=0.1983$
 $v=0.3163$ $v'=0.4745$ CCT: =6134K (duv=0.00523)

Color Ratio: R=0.123 G=0.845 B=0.032

Peak Wavelength: 443.4nm Half Bandwidth: 17.2nm

Dominant Wavelength: 496.8nm Color Purity: 0.046

CRI: Ra= 70.0, avgR(1~14)= 59.4, avgR(1~15)= 59.7 TM30: Rf= 67, Rg= 96 R1 =69 R2 =72 R3 =75 R4 =72 R5 =71 R6 =65 R7 =78 R8 =60 R9 =-32 R10=35 R11=72 R12=43 R13=68 R14=86 R15=63

Color Quality Scale:

Qa= 81.3, Qf= 81.7, Qp= 80.3, Qg= 89.4 Q1 =82 Q2 =98 Q3 =80 Q4 =74 Q5 =79 Q6 =80 Q7 =83 Q8 =89 Q9 =97 Q10=88 Q11=85 Q12=84 Q13=83 Q14=68 Q15=74 y CIE1931.

Photometric Parameters

Luminous Flux: 5859.96 lm Efficiency: : 93.18 lm/W
Radiant Power: 24.018 W
EEL: 0.15 Energy Efficiency Class: A+ (EU 874-2012)
Pupil Flux: 13165.36 Plm
Pupil Lumens Per Watt: 215.17 lm/W
Pupil Factor (Kp): 1.675

Electric Parameters

Voltage: 126.80V Current: 0.6720A
Power: 84.35W Power Factor: 0.9880
Frequency: 60.00Hz

Test Information

Scan Range: : 380~800:1nm
Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 Min
Max of Signal: 43179 (2802)
Photometric Condition: Sphere diameter: 1.50m, 4PI
CCD Integration Time: 33.63 ms