H10X-80-240

Height: 34.4" Width: 10.2" Depth: 24.5" (87.4cm) (25.9cm) (62.2cm)



- Dispenses up to 24gal (90.85L) of boiling water per hour for food prep and cleaning
- Precise temperature (212°F / 100°C) ensures consistent, high quality results
- Includes dry-plug prevention for easy installation
- Prepare large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal, and many more foods

Agency:





Specifications

Product #: 26300.0000 **Temp. Setting:** 212°F (100.000°C)

Water Access: Plumbed

Finish: Stainless
Faucet: Upper

Electrical & Capacity

Volts*	Amps	Watts	Cord	Cord Attached Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
VOIIS		Amps waits	Attached						
240	33.5	8050	No	-	-	60°F (15.5°C)	1	2	50/60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	1/4" Male Flare Fitting	-				


CAD Drawings


Additional Features

2D	Revit	KLC			
•					

MARNING:





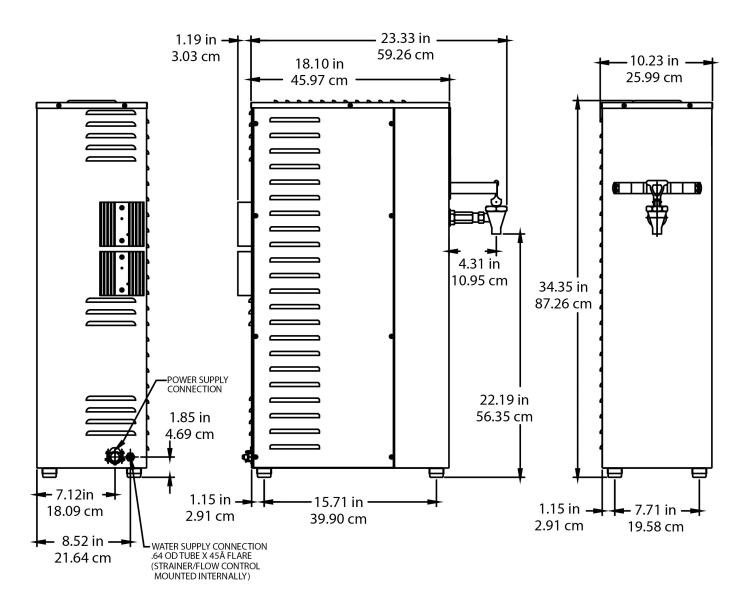

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	34.4 in.	10.2 in.	24.5 in.	39.0 in.	13.6 in.	27.5 in.	67.300 lbs	8.457 ft ³	
Metric	87.4 cm	25.9 cm	62.2 cm	99.1 cm	34.6 cm	69.9 cm	30.527 kgs	0.239 m³	



Related Products & Accessories:H10X-80-240(26300.0000)





Serving & Holding Options: H10X-80-240(26300.0000)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

