



DESCRIPTIONS



Capacity: 3 x 1/1 GN



Trays insertion: Lengthwise



Dimensions: 620 x 650 x H 670 mm



Control panel: Semi Touch



Positive cycle: 12 kg
Negative cycle: 8 kg

GAS

R404A

Climate class

Class **N**

Insulation thickness: 60 mm







Refrigerant power: 628 W



Electric power: 648 W

CONTROL PANEL DESCRIPTION



 CHILL	Blast chilling key
 FREEZE	Deep freezing key
 HARD	Hard blast chilling or Soft deep freezing key
 MENU	Decrease value key
 AUX	Increase value key
 START	Start/stop key

MANUFACTURING FEATURES




- Time or core probe control
- Internal glossy finish
- External scotch-brite finish
- 60 mm high density polyurethane foam insulation, CFC and HCFC-free
- Core probe included
- Removable grids-rack for easy cleaning
- Air condensation
- Manual defrosting
- Automatic cold holding at the end of cycle
- Temperature Range for chilling cycle is 12 kg /+3°C
- Temperature Range for freezing cycle is 8 kg /-18°C

DIMENSIONS

	BLAST CHILLER	PACKAGE
Width	620 mm	640 mm
Depth	650 mm	690 mm
Height	670 mm	810 mm
Weight/volume		75 kg/0.37 m ³

POWER SUPPLY

Power loading	0.648 kW
Cooling power	0.628 kW
Max. power loading	0.648 kW
Voltage	220 V ~ 1N 60 Hz
Feed cable section	Cable included
Capacity	3 x 1/1 GN
Pitch between the trays	67 mm

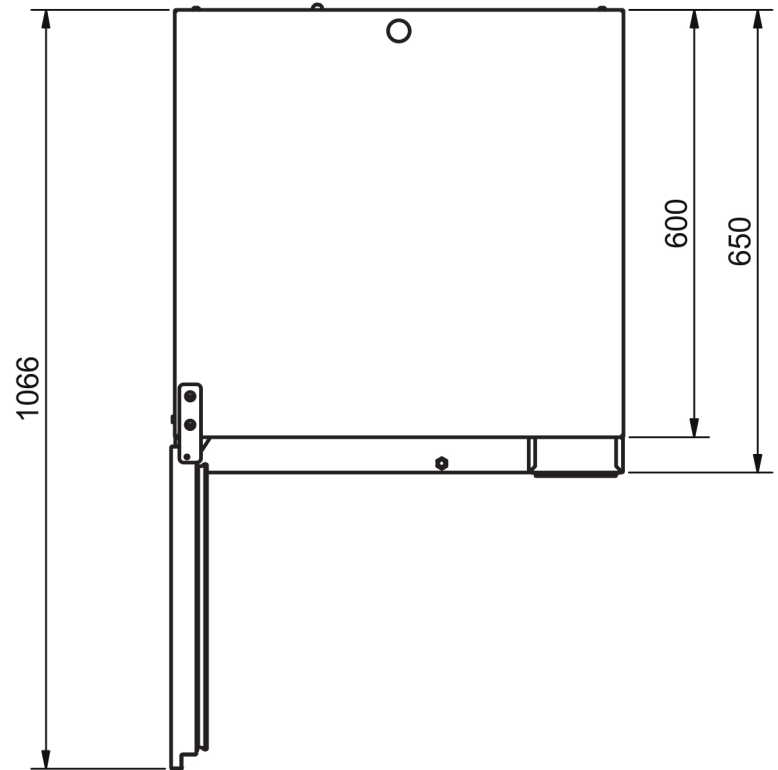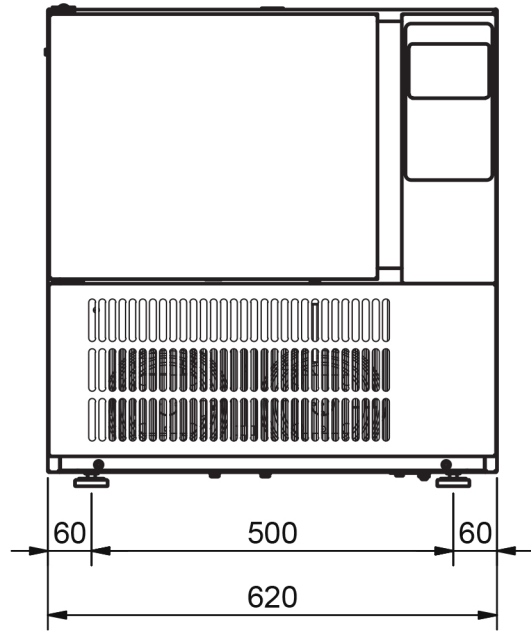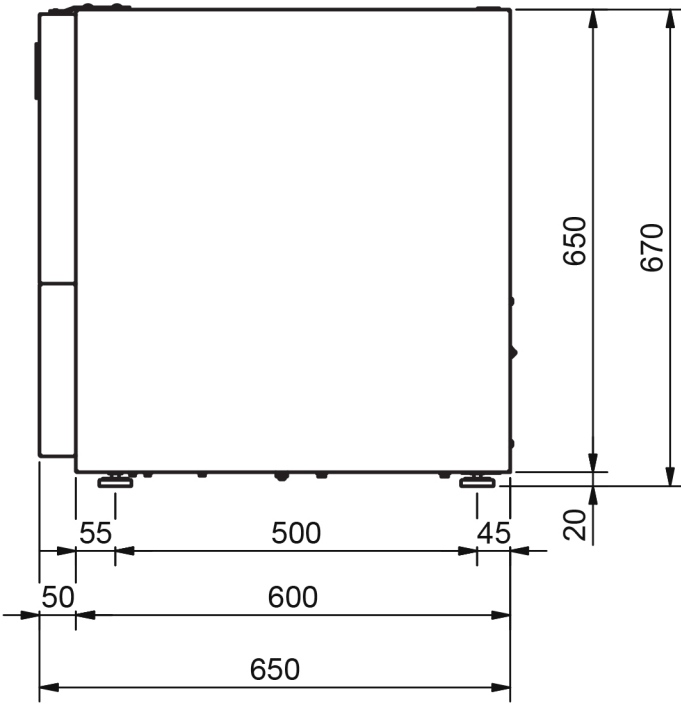

The manufacturer declines all responsibility due to errors and/or misprints.