


VACUUM PACKAGING

TURBOVAC VACUUM PACKAGING MACHINE

3 PRODUCT RANGES

1. Transparent cover, visual control, for example packaging moist and liquid products.
2. All stainless steel heavy duty industrial range, easy to clean flat working surface.
3. Aluminum range, an excellent price/quality value.

TURBOVAC 19 1/2" SEAL LENGTH
VACUUM PACKAGING MACHINE

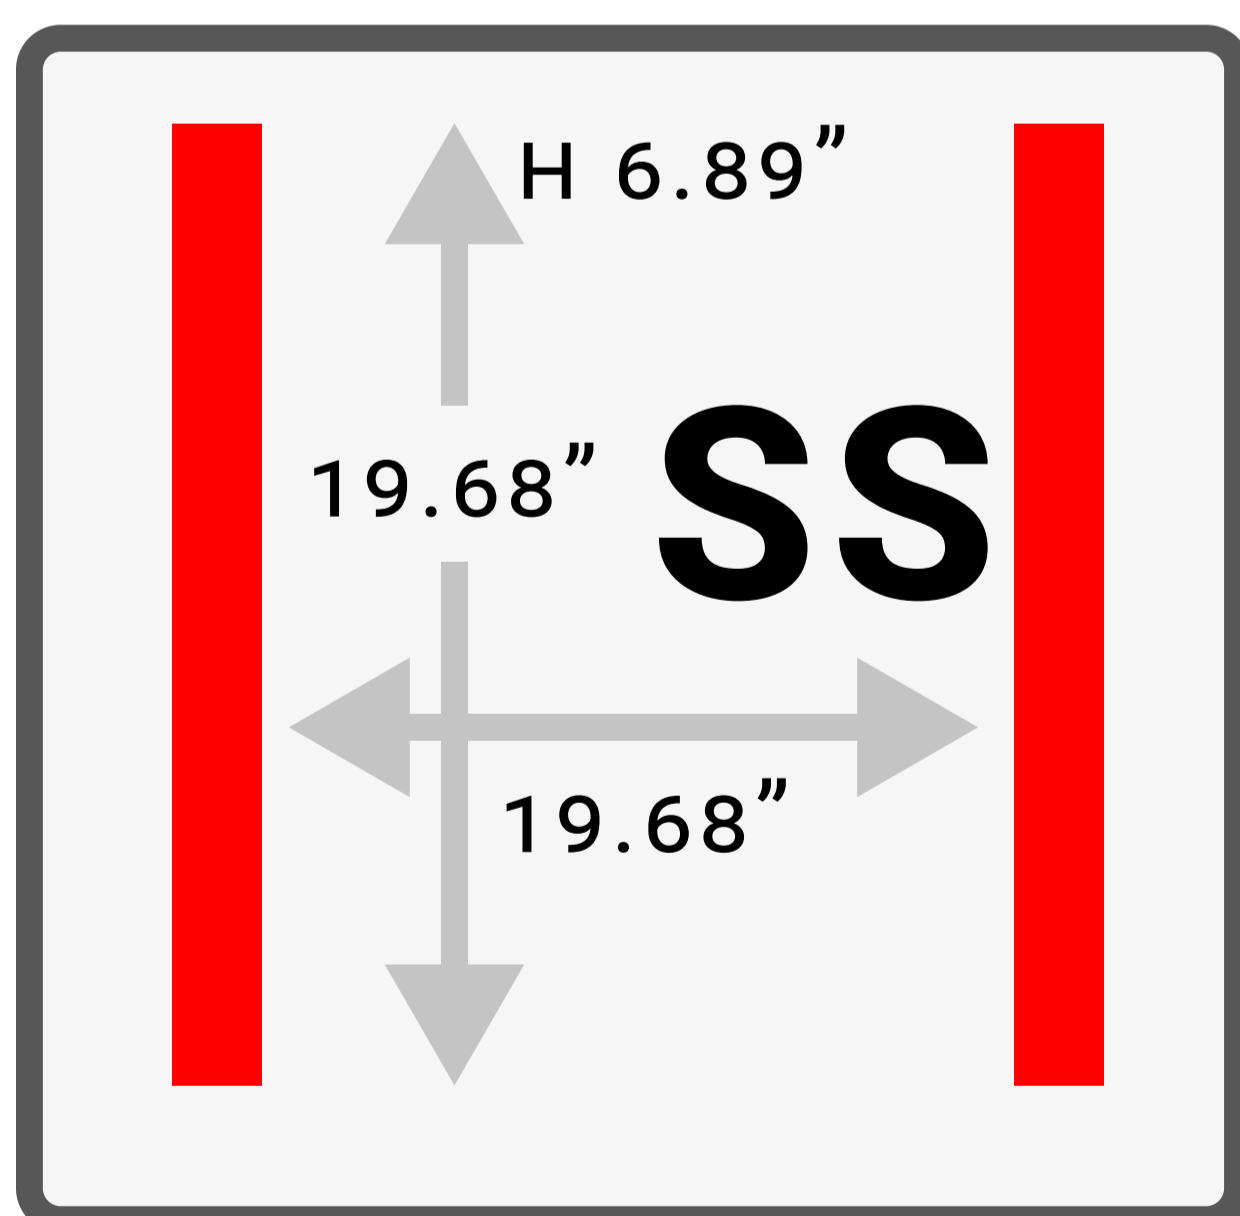

50003/M70
50004/M70

TURBOVAC VACUUM PACKAGING MACHINE

Redesigned to make the machines easier to use and maintain. All models have hygienic easy-to-clean vacuum chambers, easily removable seal beams and silicon bars for easy cleaning. An intuitive digital control unit detects automatically the optimum vacuum level for products with high moisture content, preventing moisture to be evaporated out of the product.

New Digital Control Unit With LCD

For our new line of machines, the control unit is completely redesigned simplicity was the starting point.

Our smaller machines have a control unit with the basic settings. the plug-and-play design of the machines makes installation easy and does not require any adjustments in 90% of the situations. for special packaging requirements, the machine offers the flexibility to adjust sealing time and vacuum time. the vacuum time can be set and the vacuum level reached can be monitored with the vacuum meter.

The professional machines are standard equipment with a digital LCD control unit with 10 programs. The more advanced machines are equipped with a 10 program sensor control system that actually measures the vacuum chamber. the time-controlled machines can easily be converted into sensor-controlled machines later on. The sensor measures evaporation when moist products or liquids, like sauces, are being packed. At this optimum point, moisture is extracted from the product causing it to dry out, lose weight or start bubbling and spilling over. The sensor detects this point immediatly as being the optimum level where all air and oxygen have been removed and continues the cycle by sealing the package.

The digital LCD control unit allows all settings to be easily changed. A unique indication gives the operator the option of letting the pump run for several cycles after finishing the operation. This will extend the periods between an oil change and extend the lifetime of the pump by removing moisture from the oil in the system. The control panel has also a clear indication for upcoming service intervention

Sensor Or Time Control

10 program machines can, later on, be converted into sensor-controlled machines.

With a time-controlled vacuum machine, a time is set and the vacuum level can be monitored with an analog vacuum meter. Excellent vacuum levels can be reached but the indication of the vacuum meter is less accurate than a digitally controlled unit.

With a sensor-controlled machine, the vacuum is measured with a sensor with very high accuracy and the results are digitally displayed. This results in shorter cycle times because when the desired vacuum level is reached the machine will immediately start the next operation. The total cycle time will be shorter than with a time-controlled machine. The 10 program time machine can, later on, be equipped with a sensor. (Not possible for the 1program time controlled machine)

TECHNICAL SPECIFICATIONS

SEAL LENGTH

19.68"/500MM

19.68"/500MM

10 PROGRAMMABLE CONTROL

YES

YES

VACUUM PUMP

40 M³

40 M³

MAXIMUM PRODUCT HEIGHT

6.89" / 175MM

6.89" / 175MM

USEFUL CHAMBER SIZE (DWH)

19.68" X 19.68"

19.68" X 19.68"

POWER CONSUMPTION (Kw)

3.3

3.3

ELECTRICAL

220V / 60HZ / 3PH

220V / 60HZ / 1PH

NET WEIGHT

330 LBS / 150 KG

330 LBS / 150 KG

DIMENSIONS (DWH)

26.77' X 27.36" X 40.75"

26.77' X 27.36" X 40.75"

WWW.NELLAONLINE.COM
HELP@NELLAONLINE.COM

LOCATIONS

148 NORFINCH DR
NORTH YORK, ON,
M3N 1X8
416-740-2424

433 QUEEN ST E.
TORONTO, ON,
M5A 1T5
416-847-1112

1164 ELLESMERE ROAD
SCARBOROUGH, ON,
M3N 1X8
416-292-0828