

## S T E A M

**VULCAN****C24EA SERIES  
ELECTRIC COUNTER CONVECTION STEAMER**

Shown on accessory stand with extra set of pan slides and pans



ANSI/NSF Standard #4

**SPECIFICATIONS**

Single compartment electric convection steamer. Stainless steel exterior and cooking compartment with coved interior corners. Manual control with 60 minute timer. High output stainless steel steam generator with manual drain and Smart Drain System (timed drain) with PowerFlush. Heavy duty door and door latch mechanisms. Shipped for 208/60-50/3 electrical service. Can be field converted to 208/60-50/1 and 240/60-50/3 and 240/60-50/1. Split water line connection. 1½" NPT drain connection.

**Exterior Dimensions:**

3 pan: 24" w x 33" d x 19½" h.

5 pan: 24" w x 33" d x 26" h.

UL listed. Classified by UL to NSF Standard #4.

- C24EA3-BSC** 3 pan capacity basic controls
- C24EA3-DLX** 3 pan capacity professional controls
- C24EA5-BSC** 5 pan capacity basic controls
- C24EA5-DLX** 5 pan capacity professional controls

**STANDARD FEATURES**

- Stainless steel exterior and cooking compartment with coved interior corners.
- Leveling feet.
- Manual control with 60 minute timer, 60 cycle (50 cycle x 1.2).
- High output stainless steel steam generator with manual drain Smart Drain System (timed drain) with PowerFlush.
- Heavy duty door and door latch mechanisms with gasket guard.
- Shipped for 208/60-50/3 electrical service. Can be field converted to 208/60-50/1 and 240/60-50/3 and 240/60-50/1.
- Split water line connection. 1½" NPT drain connection.
- One year limited parts and labor warranty.

**OPTIONS**

- Professional Control Package (Deluxe) includes:
  - Superheated Steam System
  - Staged Fill
  - Lighted power switch with cook and ready lights
  - Auto drain with Smart Drain System (timed drain) with PowerFlush
  - Timer 60 minute 60 cycle (50 cycle x 1.2) with Constant Steam Setting
  - Cord strain relief
- Second year extended limited parts and labor warranty contract.

**ACCESSORIES (Packaged & Sold Separately)**

- Steamer Security Package, includes controls protected by lockable cover, perforated flue cover, security fasteners & tack-welds.
- 4" adjustable counter legs.
- Open leg 24" w stand.
  - 28" h
  - 34" h
  - Set of two universal pan slides for open leg stand
  - Stand sliding shelf
  - Casters
- Stacking kit for two units with hardware, counter mount or on 15" and 28" stands.
 

**Note:** Only a single 3 or 5 pan steamer or two 3 pan steamers can be stacked on a 28" h stand. Single 3 or 5 pan steamers only on a 34" h stand. Any combination of two steamers can be stacked on a 15" stand.

  - 15" open leg stand
  - Casters
  - Single point electrical connection kit for stacked units, 3-phase only.
- Pull-out 12" x 20" sliding rack (cooking compartment). Qty. \_\_\_\_.
- Cord and plug set, 208-240v/1ph (rated to 45 amps) 72": ANGLED PLUG HBL9462C NEMA 14-60 (CORDPLG-3PAN1P).
- Cord and plug set, 208-240v/3ph (rated to 40 amps) 72": ANGLED PLUG HBL8462C NEMA 15-60 (CORDPLG-3PAN3P).
- Cord and plug set, 208-240v/3ph (rated to 55 amps) 72": ANGLED PLUG HBL8462C NEMA 15-60 (CORDPLG-5PAN3P).
- Cord and plug set, 480v/3ph (rated to 30 amps) 72": STRAIGHT PLUG HBL2731 NEMA L16-30 (CORDPLG-5PAN480).
- Flex stainless steel water connection 72" ¾" female NSHT on both ends, 2 required and 3 with filter system. Qty. \_\_\_\_.
- Water treatment system.

**VULCAN**

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602



# C24EA SERIES ELECTRIC COUNTER CONVECTION STEAMER

### SERVICE CONNECTIONS:

- ELECTRICAL CONNECTIONS:** Field Wire Electrical Connection 1 1/4" (32 mm) K.O. service entrance.
- DRAIN:** 1 1/2" IPS piped to open drain. No solid connections. 60" length before open air gap opening and not more than two bends or elbows. **Note:** Stacked units must have independent drains, do not connect together.
- GENERATOR WATER SUPPLY:** 3/4" (19 mm) male NSHT to generator, flow rate 4 gpm @ minimum 20 to maximum 60 psi. (138-414 kPa) treated water.
- CONDENSING WATER SUPPLY:** 3/4" (19 mm) male NSHT to condenser, flow rate 4 gpm @ minimum 20 to maximum 60 psi. (138-414 kPa) untreated water.

### WATER QUALITY STATEMENT:

The fact that a water supply is potable is no guarantee that it is suitable for steam generation. Your water supply must be within these general guidelines:

<b>SUPPLY PRESSURE</b>	20 - 60 psig
<b>HARDNESS*</b>	less than 3 grains
<b>SILICA</b>	less than 13 ppm
<b>TOTAL CHLORINE</b>	less than 0.1 ppm
<b>pH RANGE</b>	7-8
<b>UN-DISSOLVED SOLIDS</b>	less than 5 microns

\* 17.1 ppm = 1 grain of hardness

Other factors affecting steam generation are iron content, amount of chloridation and dissolved gases. Water supplies vary from state to state and from locations within a state. Therefore it is necessary that the local water treatment specialist be consulted before the installation of any steam generating equipment.

### NOTE:


- Dimensions which locate the above connections have a tolerance of + or -3" (+ or -75 mm).
- Installation of backflow preventers, vacuum breakers and other specific code requirements is the responsibility of the owner and installer. It is the responsibility of the owner and installer to comply with local codes.
- Do not use plastic drains.
- This appliance is manufactured for commercial installation only and is not intended for home use.

PAN CAPACITY				
MODEL	1"	2 1/2"	4"	6"
C24EA3	6	3	2	1
C24EA5	10	5	3	2

BASIC CONTROL PACKAGE					
MODEL	PH	208V		240V	
		KW	AMP	KW	AMP
C24EA3-BSC	1	8.5	41	8.5	36
	3	8.5	27	8.5	21
C24EA5-BSC	1	15	72	15	63
	3	15	48	15	36

PROFESSIONAL CONTROL PACKAGE							
MODEL	PH	208V		240V		480V	
		KW	AMP	KW	AMP	KW	AMP
C24EA3-DLX	1	9.25	44	9.25	39		
	3	9.25	29	9.25	23	9.25	12
C24EA5-DLX	1	15.75	75	15.75	66		
	3	15.75	50	15.75	39	15.75	20

**NOTE:** 208 volt, 3 phase is an unbalance load, and amp listed is the max on any leg. Refer to the I/O manual for further details.

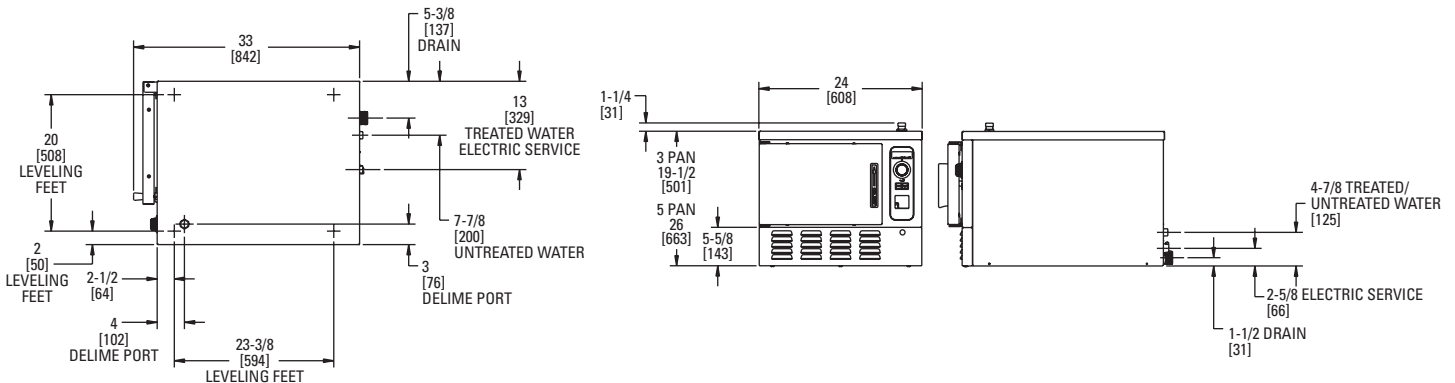

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

**NOTE:** In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.