

FEATURES

- Double sliding glass doors
- Fan cooling
- Fin blade evaporator
- Double pane glass door with front side tempered
- Lock and key
- Lockable 2 1/2" casters
- Automatic self-closing door
- Illuminated upper signage area

CONSTRUCTION

- Black baked enamel exterior
- White baked enamel interior
- Interior base stainless steel painted
- Locking double pane glass doors
- Polyethylene coated heavy-duty adjustable wire shelves
- Cabinet built to the highest engineering standards
- Foamed in place high density CFC-free polyurethane insulation
- ETL approved

CAPACITY

- CUR44SD ~ 44.2 cu. ft. comes with 8 shelves

POWER

- 115 volt
- 60 Hz
- Single Phase
- Nema 5-15 plug
- Dedicated circuit required



WARRANTY


- Compressor 5 years
- Parts 2 years
- Labour 2 years



CUR44SG

SPECIFICATIONS

The CUR units hold 33-40F (0.5-4C) for ultimate safeguarding of food and beverages. Digital display for visual temperature monitoring. LED interior illuminating lighting for maximum product merchandising. High efficiency evaporators require little work to produce big results. Contemporary and appealing, the CUR units are a perfect fit for all your visual refrigeration requirements.

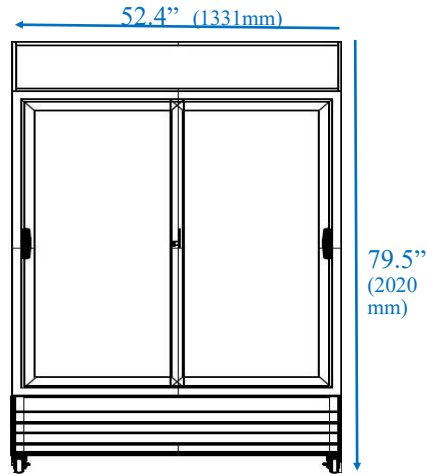

CUR44SG

Model #	CUR44SG
Dimensional Data	
Net Capacity	44.2 cu. ft.
Width	52.4" / 1330 mm
Depth	31.5" / 801 mm
Height	79.5" / 2020 mm
Width Internal	48.5" / 1232 mm
Depth Internal	23.7" / 602 mm
Height Internal	61.5" / 1562 mm
Door Type	Sliding
No. of Doors	2
No. of Shelves	8
Refrigeration Data	
Compressor	1
Electrical Data	
Electrical	115 / 60 / 1
Amps	9.5
Shipping Data	
Weight	377 lbs / 171 kg



In the interest of continuous improvement, specifications are subject to change