

BAKERLUX SHO??rom TOUCH

Convection ovens designed for professionals that require a highly productive bakery and pastry shop. With TOUCH technology at your fingertips, they are the perfect combination of efficiency and simplicity in less than a square meter.



XAFT-04HS-ETDV



XAFT-04FS-ETDV



XAFT-04FS-ETLV



XAFT-04FS-ETRV



STEAM Dlug

Instantly produces humidity inside the baking chamber, for excellent results with every batch

AIR.Plus

Bi-directional fan(s) guarantee perfect air and heat distribution within the baking chamber for uniform results at every point throughout every tray

DRY.Plus

Humid air is expelled from the baking chamber to help the internal structure of the product form properly, creating a texture that remains perfect for hours

FFFICIENT Power

Best-in-class convection efficiency: 60° C to 260° C (140° F to 500° F) in 5 minutes. Low-e glass lining and high-performance insulation ensure reduced energy consumption.

FEATURES 5

- TOUCH control panel (IPX4)
- Interior LED lighting
- 1-9 Baking steps
- Timer 0 min. to ∞
- Program up to 99 recipes
- 0/20/40/60/80/100% humidity
- 2 fan speeds
- Proofer control*
- Automatic locking door
- · Fan shut-off when door is opened
- Optional Wi-Fi & LAN connections*

*Proofer and Wi-Fi kits sold separately


	XAFT-04HS-ETDV	XAFT-04FS-ETDV	XAFT-04FS-ETLV	XAFT-04FS-ETRV	
DIMENSIONS	HALF SIZE (13" X 18")	FULL SIZE (18" X 26")	FULL SIZE (18" X 26")	FULL SIZE (18" X 26")	
	4	4	4	4	
SHELF CLEARANCE	3"	3"	3"	3"	
DOOR SWING	ТОР ТО ВОТТОМ	ТОР ТО ВОТТОМ	LEFT TO RIGHT	RIGHT TO LEFT	
	208-240V, 3800W, 15.7A, 6-20P	208-240V, 7600W, 25.2A, 6-50P	208-240V, 7600W, 25.2A, 6-50P	208-240V, 7600W, 25.2A, 6-50P	
	1	2	2	2	
	0 - 260°C	0 - 260°C	0 - 260°C	0 - 260°C	
	32 - 500°F	32 - 500°F	32 - 500°F	32 - 500°F	
	13.75" L X 19.5" W X 13.2" H	17.4" L X 27.4" W X 13.2" H	17.4" L X 27.4" W X 13.2" H	17.4" L X 27.4" W X 13.2" H	
	2.0 CUFT	3.6 CUFT	3.6 CUFT	3.6 CUFT	
EXTERIOR DIM.	28.3" L X 23.6" W X 19.7" H	33.9" L X 31.5" W X 19.7" H	33.9" L X 31.5" W X 19.8" H	33.9" L X 31.5" W X 19.8" H	
	86 LBS	126 LBS	126 LBS	126 LBS	
	30.3" L X 26.8" W X 22" H	38.2" L X 44" W X 26" H	38.2" L X 44" W X 26" H	38.2" L X 44" W X 26" H	
	93 LBS	161 LBS	161 LBS	161 LBS	




BAKERLUX SHO??ro™ TOUCH


CONSTRUCTION


- · Stainless steel housing & cooking chamber
- Double-pane glass door
- Insulated baking cavity for thermal efficiency and user safety

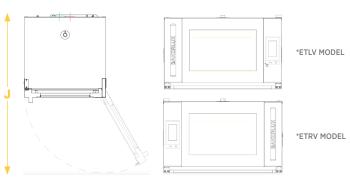

SAME DIMENSIONS FOR ETLY & ETRY MODELS.
DOOR SWINGS IN OPPOSITE DIRECTIONS







*ETDV MODELS

FOR ALL TOUCH MODELS:

OVEN MUST BE MIN. 2" FROM THE WALL ON BOTH SIDES (LEFT AND RIGHT).

				D						
XAFT-04HS-ETDV	23.6"	19.7"	28"	26.3"	7.3"	.7"	2.0"	.9"	4.4"	41.5"
XAFT-04FS-ETDV	31.5"	19.7"	33.9"	31.9"	7.8"	.7"	2.0"	.9"	15.7"	47.0"
XAFT-04FS-ETLV	31.5"	19.8"	33.9"	31.9"	7.8"	.7"	2.0"	.9"	15.7"	61.2"
XAFT-04FS-ETRV	31.5"	19.8"	33.9"	31.9"	7.8"	.7"	2.0"	.9"	15.7"	61.2"

ONE YEAR WARRANTY ON PARTS AND LABOR (GLASS DOOR NOT INCLUDED)











6-20P

V1.03.2022

