



EHEI

E-Chef® Hot Food Tables

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

EHEI: E-Chef® Hot Food Tables

Models

- EHEI36L 2 well hot food table on legs
- EHEI48L 3 well hot food table on legs
- EHEI60L 4 well hot food table on legs
- EHEI74L 5 well hot food table on legs
- EHEI36C 2 well hot food table on casters
- EHEI48C 3 well hot food table on casters
- EHEI60C 4 well hot food table on casters
- EHEI74C 5 well hot food table on casters



EHEI36L

Standard Features

- Stainless steel top and sides
- Individual wells with infinite controls
- 8" polyethylene cutting board
- Drains, manifold and common gate valve
- Stainless steel plate shelf
- Stainless steel bottom shelf with 3" riser at rear
- Models on casters standard with cord and plug
- Models on legs must be hard wired in field

Options & Accessories

- Faucets
- Composite cutting boards
- Counter protectors
- Overshelves
- Stainless steel back
- Individual gate valves
- Cord and plug (leg models)
- 208V electrical (EHEI36L and C)


Specifications


Exterior: Top is one-piece heavy-gauge stainless steel with integral 2.12" square nosing on front with 90° turn down at the rear. Sides are heavy-gauge single thickness stainless steel with 2" bends on front and rear.

Top: Top is available with (2) to (5) 11.87" x 19.87" sealed individual wells to accommodate 12"x20" pans 6" deep. Each well is constructed of heavy-gauge stainless steel with 1/2" drains. Drains are manifolded together with common gate valve. Each well is individually controlled by infinite controls. Controls are mounted on the front of the stainless steel plate shelf. Each well has a 1000 watt heating element with high limit safety switches.

Interior: Bottom shelf is heavy-gauge stainless steel with 3" high riser at the rear. 7" heavy-gauge stainless steel plate shelf on the front of the unit.

Electrical: (2) well units are standard with 120V electrical. (3) to (5) well units are standard with 208V electrical. All models on legs must be hardwired in the field. All models on casters are standard with relevant NEMA cord and plug.



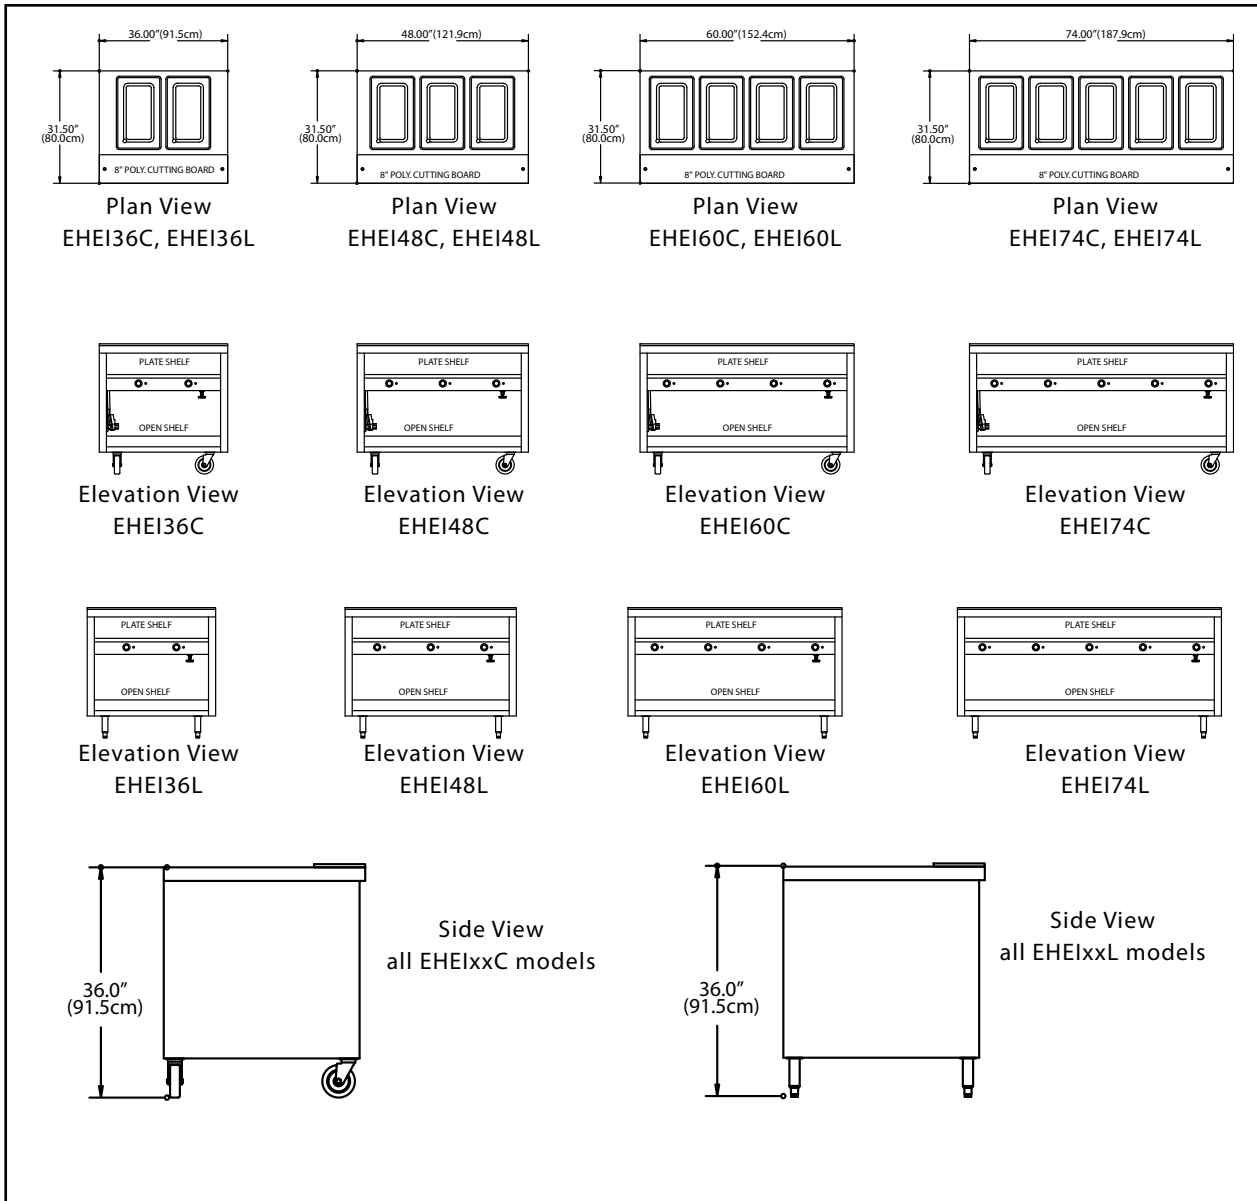

Specifications										
Model	L	D	H	# of Wells	Volts	Amps	Hz	Phase	Nema Plug	Ship Weight
EHEI36L	36"	31.5"	36"	2	120	17.0	60	1	NA	250
EHEI48L	48"	31.5"	36"	3	208/230	15.0/16.0	60	1	NA	280
EHEI60L	60"	31.5"	36"	4	208/230	20.0/22.0	60	1	NA	310
EHEI74L	74"	31.5"	36"	5	208/230	24.0/27.0	60	1	NA	350
EHEI36C	36"	31.5"	36"	2	120	17.0	60	1	5-30P	250
EHEI48C	48"	31.5"	36"	3	208/230	15.0/16.0	60	1	6-20P	280
EHEI60C	60"	31.5"	36"	4	208/230	20.0/22.0	60	1	6-30P	310
EHEI74C	74"	31.5"	36"	5	208/230	24.0/27.0	60	1	6-50P	350

Delfield reserves the right to make changes to the design or specifications without prior notice.