

SINGLE BUILT-IN AND DROP-IN ROUND HEATED WELLS Models HWB-4QT, -4QTD HWB-7QT, -7QTD HWBH-7QT, -7QTD HWB-11QT, -11QTD

Hatco Built-In Round Heated Wells provide flexibility and quality, with many options to choose from. These units hold steam table food hot and fresh with self-adjusting thermostats that read the actual temperatures and add heat only when needed.

FLEXIBILITY

UL approved Built-In Round Heated Wells are available in three sizes: round 4-Quart (4 liter) round 7-Quart (7 liter), and round 11-Quart (10 liter). Choose from a model with or without a drain, in standard, or high watt. The standard compact controls, or optional larger recessed controls can be conveniently placed where needed.

QUALITY

The following features assure the finest performance for years to come:

- 4-, 7-, and 11-quart round wells.
- Standard or high watt (4-quart standard watt only)
- Controls feature a separate lighted ON/OFF rocker switch and temperature dial, allowing preset temperatures to be maintained.
- 50% larger drain with flat screen simplifies cleaning and holds pans level.
- Easy service access to heating elements and thermostats.
- Mounting kits for combustible countertops available.
- EZ locking hardware for quick installation.
- An optional WM Control Assembly is also available that will replace most existing controls on a customer's Drop-In Heated Well Unit.

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY

ON THE METAL HEATING ELEMENT.

PLUS ONE ADDITIONAL YEAR PARTS ONLY WARRANTY



HWB-7 and 11QTD with accessory food pans

Ordering Instructions

Please specify the following with each order:

1. Desired Voltage: 120, 208, or 240V (export voltage available)

2. Base Size of Heated Well:

A. Round: 4-Quart (4-Liter), 7-Quart (7-Liter) or 11-Quart (10-Liter)

3. Choose With or Without Drain

4. Mounting Style:

A. Top Mounted

5. Wattage:

A. High Watt

B. Standard Watt, (4-Quart (4-Liter) available in standard watt only)

6. Agency:

A. UL and CUL

B. UL-EPH (sanitary listing)

C. CE Mark available on standard and high watt

Model HWB-7QT with accessory food pan and notched lid



Model HWB-11QT with accessory food pan and notched lid



Accessory hinged and notched lid for 4, 7, or 11 Quart round pans.

Built-in and Drop-in Heated Wells Countertop Cutout Dimensions

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth	Below Counter
HWB-4QT	Ø 7.125" (181 mm)	Ø 7.56" (192 mm)	_	_	9.51" (241 mm)
HWB-4QT●	9" (229 mm)	9.25" (235 mm)	9" (229 mm)	9.25" (235 mm)	9.51" (241 mm)
HWB-7QT	Ø 9.125" (232 mm)	Ø 9.56" (243 mm)	_	_	8.7" (221 mm)
HWB-7QT●	11" (279 mm)	11.25" (286 mm)	11" (279 mm)	11.25" (286 mm)	8.7" (221 mm)
HWB-11QT	Ø 11.125" (282 mm)	Ø 11.56" (294 mm)	_	_	8.7" (221 mm)
HWB-11QT●	13" (330 mm)	13.25" (337 mm)	13" (330 mm)	13.25" (337 mm)	8.7" (221 mm)

[•] Indicates cutout dimensions for a combustible countertop surface.

Standard thermostatic control with bezel



Optional larger recessed thermostatic control – No Charge



Optional WM Control Assembly (exact replacement for most existing drop-in heated well units)



Control Cutout Dimensions

- A. Standard Compact Control Panel Cutout: 3.25"W (83 mm) x 3.75"H (95 mm)
- B. Optional Recessed Control Panel Cutout: 5.88"W (149 mm) x 6.38"H (162 mm)
- C. Optional WM Control Assembly Panel Cutout: 4.78"W (121 mm) x 5"H (127 mm)










HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 www.hatcocorp.com • E-mail: equipsales@hatcocorp.com



SINGLE BUILT-IN AND DROP-IN ROUND HEATED WELLS Models HWB-4QT, -4QTD HWB-7QT, -7QTD HWBH-7QT, -7QTD HWB-11QT, -11QTD HWBH-11QT, -11QTD

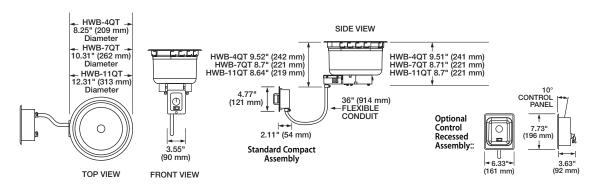

Models HWB-4QT Series, HWB-7QT Series and HWB-11QT Series

SPECIFICATIONS

4 Quart (4 Liter) Round Models - Standard Watt

· · · ·				
Model*	Volts	Watts	Amps	Shipping Weight
HWB-4QT HWB-4QTD	120 208 240	500 536 600	4.2 2.6 2.5	9 lbs. (4 kg) 12 lbs. (5 kg)

7 Quart (7 Liter) Round Models - Standard Watt

Model*	Volts	Watts	Amps	Shipping Weight
HWB-7QT HWB-7QTD	120 208 240	500 536 600	4.2 2.6 2.5	10 lbs. (5 kg) 13 lbs. (6 kg)

7 Quart (7 Liter) Round Models - High Watt

Model*	Volts	Watts	Amps	Shipping Weight
HWBH-7QT HWBH-7QTD	120 208 240	800 715 800	6.7 3.4 3.3	10 lbs. (5 kg) 13 lbs. (6 kg)

11 Ouart (10 Liter) Round Models - Standard Watt

II Qualt (10 Lit	Quart (10 Liter) Round Models – Standard Watt				
Model*	Volts	Watts	Amps	Shipping Weight	
HWB-11QT HWB-11QTD	120 208 240	500 536 600	4.2 2.6 2.5	11 lbs. (5 kg) 14 lbs. (6 kg)	

11 Quart (10 Liter) Round Models - High Watt

Model*	Volts	Watts	Amps	Shipping Weight
HWBH-11QT HWBH-11QTD	120 208 240	800 715 800	6.7 3.4 3.3	11 lbs. (5 kg) 14 lbs. (6 kg)

^{* &}quot;D" added to model number indicates unit with 3/4" NPT drain.

DIMENSIONS

HWB-4QT Series: 8.25" Diameter x 9.51"H (209 x 241 mm). HWB-7QT Series: 10.31" Diameter x 8.7"H (262 x 221 mm). HWB-11QT Series: 12.31" Diameter x 8.7"H (313 x 221 mm).

Control Panel:

Standard Compact: 3.55"W x 2.11"D x 4.77"H (90 x 54 x 121 mm)
Optional Recessed: 6.33"W x 3.63"D x 7.73" (161 x 92 x 196 mm).
Optional WM Control: 5.88"W x 3.95"D x 6.25"H (149 x 100 x 159 mm). Not available in Export voltages.

VOLTAGE

120, 208, and 240 volts, single phase. Export voltages available.

OPTIONS (NOT FOR RETROFIT)

- ☐ Additional Lead Wire available in one foot increments (Lead wire only conduit not included) (Models are shipped with 1' (305 mm) of lead wire no conduit)
- ☐ Thermostat with 6' (1829 mm) Capillary
- ☐ Larger Recessed Thermostat Control
- WM Control Assembly

ACCESSORIES

- ☐ Mounting Kit for Combustible Countertops (All Models)
- ☐ Round Pans
- ☐ Notched Lids or Hinged and Notched Lids
- ☐ ¾ NPT Ball or Gate Valve for Unit with Drains
- ☐ Kit allows Mounting to Thick Countertops-4 Brackets

PRODUCT SPECS Built-in Round Heated Well

The Built-in Round Heated Well shall be a Modelas manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the Built-in Heated Well shall be rated atwatts,volts, and beinches

(millimeters) in overall width and beinches (millimeters) in overall depth. It shall consist of stainless and aluminized steel housing with a metal sheathed heating element, EZ locking hardware for installation, and a remote thermostat with lighted power switch.

Accessories may include stainless steel mounting kit and valves.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350 Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com