

BACK BARS SLIDING DOORS

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Stainless steel framework construction
- Positive seal gaskets
- Doors have lock and key
- Adjustable, heavy-duty epoxy coated wire shelves (two per door)
- Easy to mount 4" casters (two lockable in front) are standard with all units
- Top: 430 stainless steel
- Interior: 430 stainless steel interior with 304 stainless steel floor
- Exterior: Heavy duty, wear resistant black paint
- R-290 Natural refrigerant
- Temperature: 33 to 40°F / 0.5 to 4°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- IBB49-2G-24SD holds: 48 x 6 pks of 12 oz. cans or 216 12 oz. bottles
- IBB61-2G-24SD holds: 72 x 6 pks of 12 oz. cans or 324 12 oz. bottles



NEMA
5-15P



IBB49-2G-24SD



IBB61-2G-24SD

Specifications





DESIGNED TO OPERATE IN AMBIENT TEMPERATURES BETWEEN 40F-90F FOR OPTIMUM PERFORMANCE.



Model	Doors	Ext. Dimensions W X D X H (In)	Int.. Dimensions W X D X H (In)	Amps	H.P	Ship Weight
IBB49-2G-24SD	2	49.1 x 24.4 x 41.7	36 x 20.01 x 29.37	3	0.40	298 lbs
IBB61-2G-24SD	2	61.1 x 24.4 x 41.7	47.99 x 20.01 x 29.37	3	0.40	340 lbs

BACK BARS SLIDING DOORS

Dimensions in inches (mm)

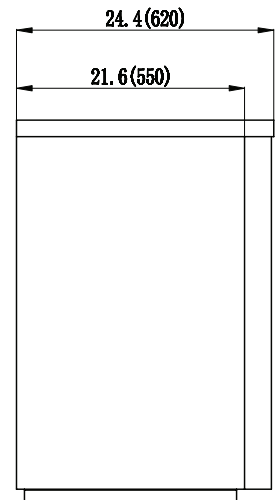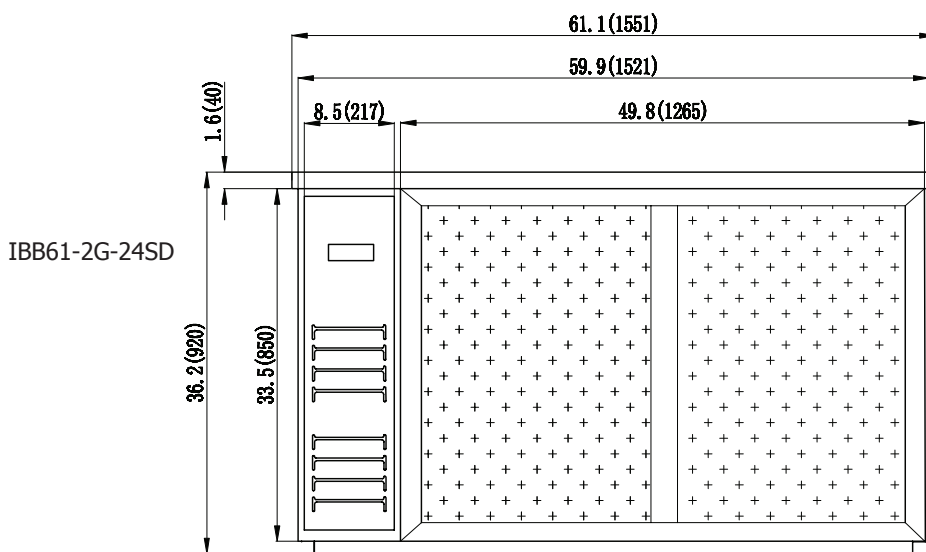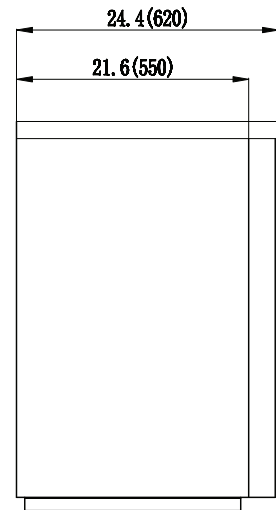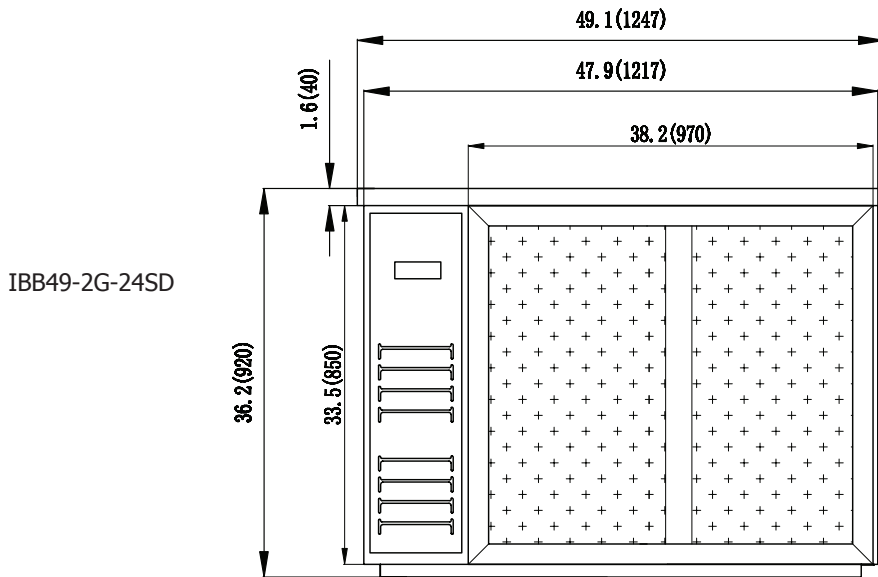

Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

3560 NW 56th St.
Fort Lauderdale, FL 33309 USA



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com

5659 Royalmount Ave.
Montreal, QC H4P2P9 CANADA