



## Thermostat Control **GRIDDLES**

### Features

- The Ikon Thermostat Control Griddles are available in 24", 36", 48" & 60" widths, the continuous 30,000 BTU output per burner provides even heat to the 1" thick polished steel griddle plate
- Adjustable manual gas controls provide easy and safe operations
- "U" shape burners provide even heat distribution every 12"
- 1" griddle plate
- 30,000 BTU/ burner
- Gas control knob every 12"
- All stainless steel cabinet
- Double wall insulated sides
- Temperature Range: 200F-450F
- Widths: 24", 36", 48", & 60"
- "Cool-to-the-touch" front s/s edge
- Back and side splash guards fully welded to griddle plate
- Flue located on back of unit for ample ventilation
- Adjustable stainless steel legs, non-skid feet
- Easy to remove 3-1/4" grease drawer with "weep hole" and baffle
- Griddle is fully serviceable from the front
- **Available in Natural gas(NG) or Liquid propane(LP).**  
**A conversion kit is supplied with each unit**



ITG-24



ITG-36



ITG-48




ITG-60





# Thermostat Control GRIDDLES

Dimensions in inches

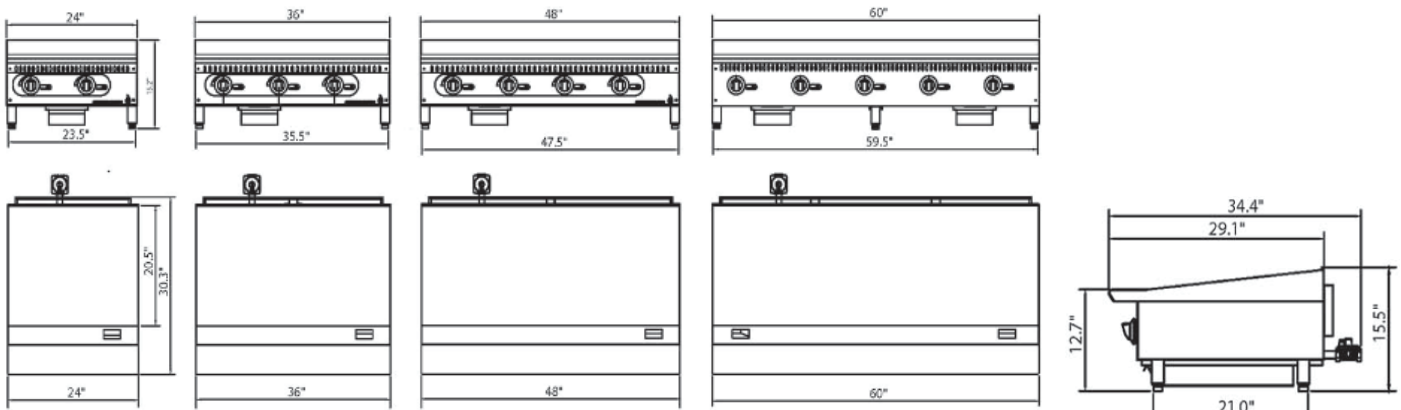

ITG-24

ITG-36

ITG-48

ITG-60

## Specifications

Model	Footprint	Overall Dimensions	Weight	Shipping Dimensions	Shipping Weight
ITG-24	23.5"W x 21.0"D (59.7cm x 53.4cm)	24.0"W x 34.4"D x 15.5"H (61.0cm x 87.3cm x 39.4cm)	143 lbs (65kg)	28.3"W x 36.2"D x 19.3"H (72cm x 92cm x 49cm)	174 lbs (79.1kg)
ITG-36	35.5"W x 21.0"D (90.2cm x 53.4cm)	36.0"W x 34.4"D x 15.5"H (91.4cm x 87.3cm x 39.4cm)	198 lbs (90kg)	40.6"W x 36.2"D x 19.3"H (103cm x 92cm x 49cm)	242 lbs (110kg)
ITG-48	47.5"W x 21.0"D (120.6cm x 53.4cm)	48.0"W x 34.4"D x 15.5"H (122.0cm x 87.3cm x 39.4cm)	253 lbs (115kg)	52.8"W x 36.2"D x 19.3"H (134cm x 92cm x 49cm)	304 lbs (138kg)
ITG-60	59.5"W x 21.0"D (151.1cm x 53.4cm)	60.0"W x 34.4"D x 15.5"H (152.4cm x 87.3cm x 39.4cm)	308 lbs (140kg)	64.8"W x 36.2"D x 19.3"H (165cm x 92cm x 49cm)	372 lbs (169kg)

**Please Note:** These items are shipped on a pallet and are crated for protection during LTL shipment. Overall Dimensions include the gas regulator located on the back of the unit



Model	Cooking Area	Controls	Number of Burners	BTU's per Burner	Total BTU's
ITG-24	24" W X 20.5" D	Thermostatic	2	30,000	60,000
ITG-36	36" W X 20.5" D	Thermostatic	3	30,000	90,000
ITG-48	48" W X 20.5" D	Thermostatic	4	30,000	120,000
ITG-60	60" W X 20.5" D	Thermostatic	5	30,000	150,000

### GAS REQUIREMENTS

- Natural Gas or Liquid Propane (LP) Gas main supply required
- A conversion kit is supplied with each unit. In order to avoid any warranty issues, conversion of your unit must be completed by an authorized Ikon service agent.
- 3/4" NPT gas connection
- 30,000 BTU's per burner
- One pilot light per burner
- Natural gas 4" W.C., LP gas 10" W.C.



Tel.: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100

3560 NW 56th St.  
Fort Lauderdale, FL 33309 USA



Tel.: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832

5659 Royalmount Ave.  
Montreal, QC H4P2P9 CANADA

sales@mvpgroupcorp.com



www.mvpgroupcorp.com