# LX-24RB SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR



Large single door merchandiser refrigerator energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, profesional technical service and unmatched warranty.



#### **KEY FEATURES**

#### • Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low global warming potential (GDP). Meets all USA, California & Canada refrigerant & energy standards.

#### • Digital Temperature Display

Electronic controller assures optimal refrigeration performance through precision temperature control.

### • High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.

#### Standard LED Lighting System

Ultra bright 250 LUX, low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.

#### • Spark-Free Refrigeration Components

All glass door merchandiser models have spark free refrigeration components for optimal safety, per UL requirements.

#### • Low Noise Refrigeration Unit

Rated under 65 Db















# LX-24RB SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR




#### STANDARD FEATURES INCLUDE

- Integrated Kickplate + Lock
- Display
- Casters

## **ACCESSORIES (OPTIONAL)**

- Gravity Kit
  20 oz Bottle "Pack Out" Capacity: 280
- Extra Shelf
- Price Tag
- Door Decals\*
- Side Decals\*
- Whole Cabinet Decals\*

\*Minimun Qty required

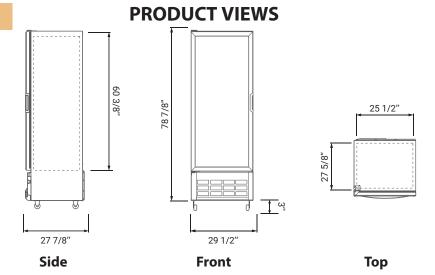

Exterior	Dimensions	Usable Interior Capacity			Material		
H:	78 7/8" (201 cm)   W/Caster: 81 7/8" (208 cm)	H: 57 7/8" (134 cm)			Flat Plastic Frame		
W:	29 1/2" (75 cm)	W: 24 3/8" (62 cm)			Shelves 4		
D:	27 7/8" (71 cm)	D: 19 1/8" (48 cm)			Shelf Size		
Interior Dimensions		Usable Volume			W: 24 3/4" (63 cm)		
H:	60 3/8" (154 cm)	19.2 Ft3 / 543 L			D: 19 5/8" (50 cm)		
W:	25 1/2" (65 cm)	Doors			Exterio	r Material	Pre-painted steel
D:	27 5/8" (55 cm)	1			Interio	r Material	Pre-painted stee
REFRIGERATION PERFORMANCE		ELECTRICAL			LOGISTICS		
Refrigerant		Power Supply Plug Type			Trailer Loads		
R290a / 1.94 oz (0.055 kg)		115V	//60Hz	NEMA 5-15P	53': 6	50	
Compressor Power		Amps			Unit Weight		
1/4 HP		2.8			223.7 lb (101.5 kg)		
Thermostat default setting		Controller			Shipping Weight		
32°F (0°C) to 44.6°F (7°C)		ERC112			240.5 lb (109.1 kg)		
Energy Consumption		Lighting			Shipping Dimensions		
1.941 kWh/24h		2 modules, 36 LED per			H: 82 1/4" (209 cm)		
Condenser		Cord Length			W: 32 1/8" (82 cm)		
Dynamic		128" (327 cm)			D: 32 5/8" (83 cm)		

KOOL-IT SIGNATURE is a registered trademark of MVP Group. Specifications subject to change without notice.





