



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
 www.toplineplumbing.com

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

TOP-LINE PART NO. _____

TOP-LINE® Low Lead 4" (102mm) OC Deck Mount Faucet with Swivel Gooseneck Spout and Quarter Turn Ceramic Valves

TLL11-410x Series

- TLL11-4100-SE1 3" Swivel Gooseneck Spout
- TLL11-4102-SE1 6" Swivel Gooseneck Spout
- TLL11-4101-SE1 8" Swivel Gooseneck Spout

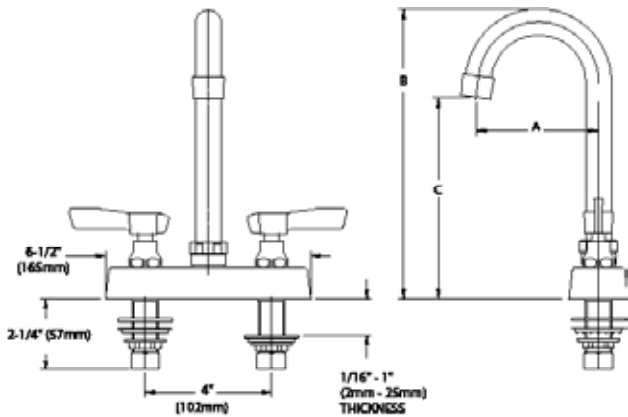

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples
 1/2" NPSM Male Inlet
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi

Approximate shipping weight - 3 lbs
 Warranty - 2 years parts

Solid heavy duty low lead cast body is specification and commercial quality.

Commercial Quality Features

- Stainless steel gooseneck spout
- Quarter turn ceramic valves
- Built in check valves to prevent cross flow and back flow
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

SPECIFICATIONS:

Deck Mount Faucet to be TOP-LINE TLL11-410x-SE1 Series in the following configuration:

- _____ TLL11-4100-SE1 3" Swivel Gooseneck Spout
- _____ TLL11-4102-SE1 6" Swivel Gooseneck Spout
- _____ TLL11-4101-SE1 8" Swivel Gooseneck Spout

Faucet body to be constructed of polished chrome plated brass. Handles to be lever style. Supply inlets to be 4" on center. Valves to be 1/4 turn ceramic type. Spout to be swivel gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard aerator.

Model No.	A	B	C
TLL11-4100-SE1	3" (76mm)	7-1/2" (191mm)	6" (152mm)
TLL11-4101-SE1	8" (203mm)	11" (279mm)	9-1/8" (232mm)
TLL11-4102-SE1	6" (152mm)	8-1/2" (216mm)	5-1/2" (140mm)

