RESTAURANT RANGES

VULCAN

GAS RESTAURANT RANGE 24" WIDE GAS RANGE



- SX24-4BN 1 Space Saver Oven / Natural Gas
- SX24-4BP 1 Space Saver Oven / Propane (space saver ovens hold full size bake sheets front to back)

STANDARD FEATURES

- Stainless steel front, sides, backriser, lift-off high shelf.
- 6" Stainless steel adjustable legs.
- 28,000 BTU/hr open top burners with lift-off heads.
- Shrouded flash tube pilot system (one pilot per two burners).
- 12" x 12" cast top grates with aeration bowls.
- 30,000 BTU/hr standard oven cavity measures 20.6"w x 25.5"d x 13.7"h.
- Oven thermostat adjusts from 250° to 500°F.
- One oven rack and four rack positions.
- ³⁄₄" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

ACCESSORIES (Packaged & Sold Separately)

- Extra oven rack.
- □ Set of four casters (two locking).



SPECIFICATIONS

24" wide SX series light-duty range, Vulcan Model No. SX24-4B. Stainless steel front, sides, backriser, high shelf and bullnose. High temperature burner T knobs with set screw. Porcelain door liner and oven bottom. Four 28,000 BTU/hr. cast top burners with lift-off burner heads. Shrouded flash tube pilot system (one pilot per two burners). 12" x 12" cast top grates with aeration bowls. Heavy duty top grates and burner heads. Compression spring door hinge system for durability. 30,000 BTU/hr. oven measures 20.6"w x 25.5"d x 13.7"h. Thermostat adjusts from 250° to 500°F. One oven rack with four rack positions. $\frac{3}{4}$ " rear gas connection and gas pressure regulator. Total input: 132,000 BTH/hr.

Exterior Dimensions:

24"w x 32.5"d x 55"h on 6" adjustable legs.



105 Gordon Baker Road, Suite 801
Toronto, Ontario M2H 3P8 Toll-free: 1-866-334-2371 Quote & Order Fax: 1-416-496-8112

VULCAN

GAS RESTAURANT RANGE 24" WIDE GAS RANGE

INSTALLATION INSTRUCTIONS


- 1. A pressure regulator sized for this unit is included. Natural gas 5.0" W.C., propane gas 10.0" W.C.
- 2. Gas line connecting to range must be ³/₄" or larger. If flexible connectors are used, the inside diameter must be ³/₄" or larger.
- An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.
- These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.

5.	<u>Clearances</u>	<u>Rear</u>	Sides
	Combustible	6"	10"
	Standard Oven Non-combustible	0"	0"
	Convection Oven Non-combustible	Min. 4"	0"

6. For proper combustion, install equipment on adjustable legs or casters provided with unit.

NOTE: In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.

Specify type of gas when ordering. Specify altitude when above 2,000 feet.

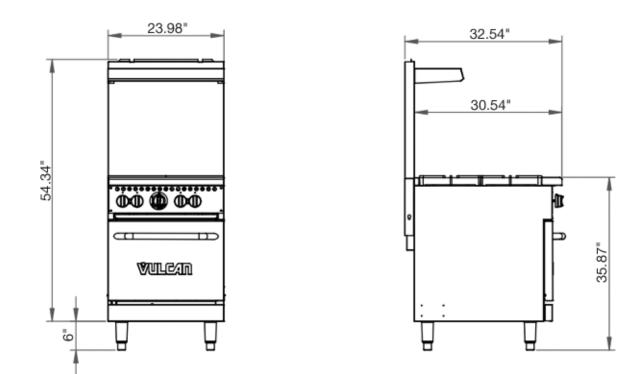

TOP CONFIGURATION	MODEL NUMBER	DESCRIPTION	TOTAL INPUT BTU / HR	SHIPPING WEIGHT LBS / KG
	SX24-4BN	1 Space Saver Oven / 4 Burners / Natural Gas	143,000	350 / 159
	SX24-4BP	1 Space Saver Oven / 4 Burners / Propane	143,000	350 / 159

This appliance is manufactured for commercial use only and is not intended for home use.



105 Gordon Baker Road, Suite 801
Toronto, Ontario M2H 3P8 Toll-free: 1-866-334-2371 Quote & Order Fax: 1-416-496-8112