


AUTOGRAPH CHAISE

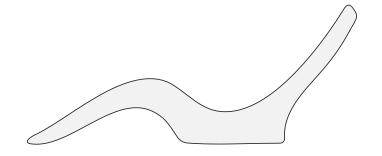

THANK YOU FOR YOUR PURCHASE

Our team of expert designers, craftsmen, and pool industry professionals have obsessed over every detail of your Autograph Chaise. From concept to delivery, every decision was made with you in mind. Sweating the smallest things is our goal, so you can enjoy the big things that matter - making meaningful moments.

Your outdoor experience comes with peace of mind. That's why we pride ourselves on long-lasting, low-maintenance outdoor living, and we back it up with a best-in-class warranty.


BEFORE YOU START

For fun and effective setup, prepare to get wet. Throw on your bathing suit, gather your setup materials and jump in!


IMPORTANT NOTE

The Autograph Chaise is designed for water depths up to 12" or on-deck.

REQUIRED TOOLS




YOUR POOL







STEP 1: Place the Autograph Chaise upside down in the shallow end of your pool. Remove the plugs from the front and base fill holes with a flathead screwdriver.

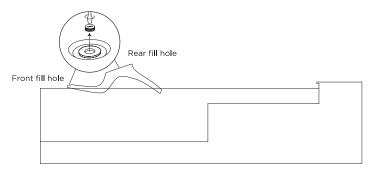

STEP 2: Submerge the front fill hole first and allow water to start filling the chaise. You will hear the cavity filling from the base fill hole.




STEP 3: Allow the chaise to submerge. Water will enter quickly. Once the entire chaise is filled, rock it several times front to back to release any remaining air.




STEP 4: Keep the chaise submerged and screw the plugs back in. Handle plugs carefully to avoid cross-threading them.



STEP 5: Turn the Autograph Chaise right side up and position the base on edge of the ledge. Carefully slide it into its final location.



STEP 6: Enjoy your new Autograph Chaise and begin creating life's most meaningful moments. Tag us for a chance to be featured!



CARE AND MAINTENANCE

ROUTINE CLEANING

Clean with a soft cloth, microfiber towel, or spray down with a water hose. For a deeper clean, use mild soap and water with a soft bristle brush.

POWER WASHING

Use caution to avoid etching your Autograph Chaise. Start with a very low PSI at least 3 feet away from furniture, and test on the under side before moving closer. Move closer or increase PSI gradually and with caution until dirt is removed. Check often to ensure no etching is left on furniture.