


# MSI

Making Dream Surfaces Attainable

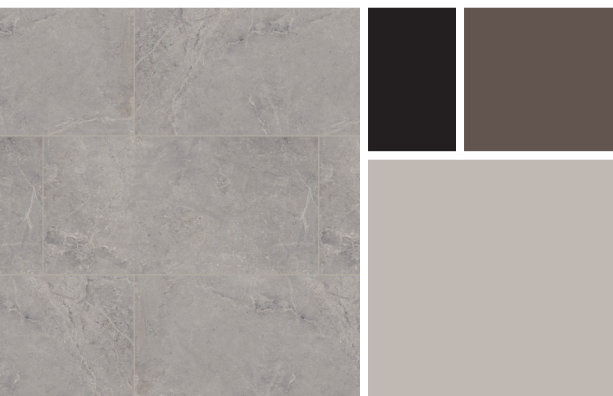

AQUABLU

Official Distributor

(800) 971 1442

[www.aquablumosaics.com](http://www.aquablumosaics.com)

Soreno  
Porcelain Collection

## Colors



Grigio



Ivory



Taupe

Size	Thickness	GRIGIO	IVORY	TAUPE
2x2	3/8"	NSORGRI2X2	NSORIVO2X2	NSORTAU2X2
24x24	3/8"	NSORGRI2424	NSORIVO2424	NSORTAU2424
24x48	3/8"	NSORGRI2448	NSORIVO2448	NSORTAU2448
13x24	3/8"	LCOPNSORGRI1324-EE	LCOPNSORIVO1324-EE	LCOPNSORTAU1324-EE
24x24	3/8"	LPAVNSORGRI2424	LPAVNSORIVO2424	LPAVNSORTAU2424
24x48	3/8"	LPAVNSORGRI2448	LPAVNSORIVO2448	LPAVNSORTAU2448

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	Porcelain DCOF < 0.42 Matte	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V4	Arterra Paver DCOF > 0.42 Matte	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Luxury and durability come together in our Soreno Collection. Available in matte and polished finishes and in the most sought after large format sizes 24"x24" and 24"x48" Soreno gives floors, walls, and countertops a classic yet modern aesthetic that's welcomed in any home or commercial space. Indoors or out, no matter where this stylish collection goes the compliments are sure to follow.

### Technical Information

Primary Colors: Gray-Light, White, Taupe

Material Type: Porcelain

Finish: Matte

Polished: Hardness / Mohs 5

Matte: Hardness / Mohs 7

### Features At A Glance

- Unique Large Format 24X24 & 24X48
- 3 Color In a Concrete Look
- Available In a Matte Finishes

### Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

This is a Large Format Tile: It is mandatory that the substrate, that the tile is being applied to, is verified by the professional installer to be acceptable for Large Format tiles. It is highly recommended that the mortar coverage on the floor surface and the tile be greater than 95% to be fully supported of this tile. Back Buttering is essential to avoid insufficient coverage that will result in cracking and tile displacement. LFT (LARGE FORMAT TILE) and LHT (LARGE HEAVY TILE) Modified Thinset is highly recommended with the use of a Leveling System. No Claims accepted after the tiles are installed.

**Disclaimer: Wet Cutting Instruction** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.

