



INSTALLATION GUIDE

AQUABLU

Official Distributor
(800) 971 1442

www.aquablumosaics.com


COLOCACIÓN | APPLICATION | INSTALLATION

1. RECOMMENDATIONS HOW TO LAY THE MATERIAL:

PERFECT MOSAIC APPLICATIONS IS THE BEST EXAMPLE TO OBTAIN YOUR PROFESSIONAL SERVICES IF YOU FOLLOW OUR RECOMMENDATIONS, YOU WILL ACHIEVE PERFECT RESULTS



PAPER
315x315 mm (APROX)



MESH
315x315 mm (APROX)




DOTS
315x396 mm

PAPER

1. THE SURFACE, WALLS, FLOORS ... WHERE YOU ARE GOING TO PLACE THE MATERIAL, MUST BE PERFECTLY SMOOTH AND LEVELED, TO OBTAIN THE PERFECT FINISH.
2. ADJUST THE PLATE AND PLACE ON THE BASE SPREAD WITH GLUE.
3. PRESS WITH THE HELP OF A WOOD OR RUBBER TROWEL.
4. AFTER 24 HOURS SOAK THE KRAFT PAPER IN WATER UNTIL SATURATED.
5. REMOVE WITH THE HELP OF A SPONGE TO CLEAN OFF ANY GLUE LEFT ON THE PAPER.
6. TO FILL THE GAPS, APPLY A LAYER OF THE FILLING MATERIAL WITH THE HELP OF A SPATULA.
7. CLEAN WITH A DAMP SPONGE, RINSE AND DRY WITH A VERY DRY CLOTH.
8. IF YOU HAVE FOLLOWED THESE INSTRUCTIONS, YOU WILL ACHIEVE OPTIMAL RESULTS.

MESH - DOTS

1. THE SURFACE, WALLS, FLOORS ... WHERE YOU ARE GOING TO PLACE THE MATERIAL, MUST BE PERFECTLY SMOOTH AND LEVELED, TO OBTAIN THE PERFECT FINISH.
2. ADJUST THE PLATE AND PLACE ON THE BASE SPREAD WITH GLUE.
3. PRESS WITH THE HELP OF A WOOD OR RUBBER TROWEL.
4. TO JOIN, APPLY A LAYER OF THE ESPECIAL JOINING PRODUCT WITH A RUBBER SPATULA.
5. CLEAN WITH A DAMP SPONGE, RINSE AND DRY WITH A VERY DRY CLOTH.
6. IF YOU HAVE FOLLOWED THESE INSTRUCTIONS, YOU WILL ACHIEVE OPTIMAL RESULTS.

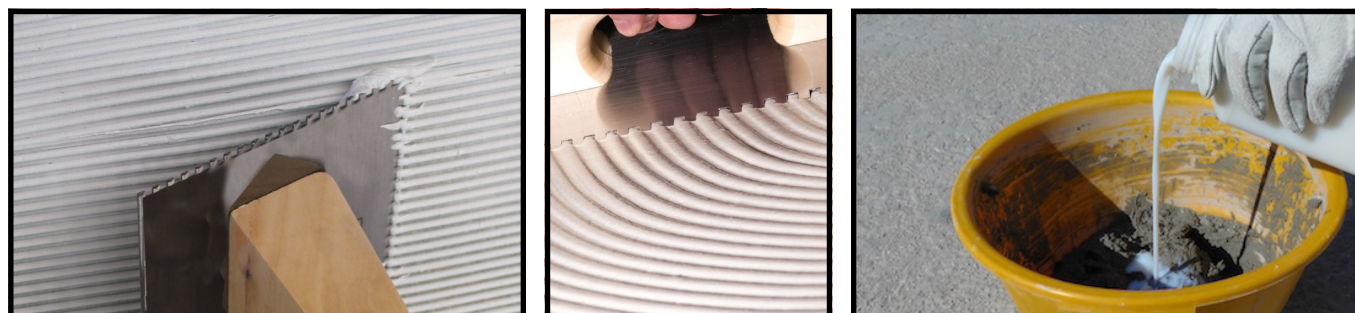

TECHNICAL AREA

WATER ABSORPTION.....0%
 FROST RESISTANT.....NOT DAMAGE
 THERMAL SHOCK RESISTANTSIN VARIACIÓN - RESISTANT | SANS VARIATION
 CHEMICAL RESISTANTÁCIDOS Y ALCALINOS | ACIDS & ALCALIS | ACIDES ET ALCALINS
 PRESSURE COOKER AUTOCLAVE RESISTANTSIN VARIACIÓN | UNCHANGING | SANS VARIATION
 THERMAL EXPANSION RESISTANTSIN VARIACIÓN | NOT DAMAGE | SANS VARIATION NOT DAMAGE
 LOST-LASTINGUNLIMITED | ILLIMITÉE

SPECIFIC WEIGHT2,45 A 2,48 KG/DM3
 REFRACTIVE INDEX.....1,51 A 1,53
 THERMAL SHOCK RESISTANT730º
 COEFFICIENT OF LINEAL EXPANSION (BETWEEN 0 & 300º)85 X 10-7
 YOUNG MODULUS7 X 105 KG/CM2
 MOHS HARDNESS SCALE4
 ROCKWELL (C).....48 RC

SPECIFIC HEAT AT 20°C0,18 CAL/GR/°C
 AT 1000 °C:0,32 CAL/GR/°C
 THERMIC CONDUCTIVITY AT 20 °C.....0,018 CAL/SEG/CM/°C
 DIALECTRIC CONSTANT (IMC AT 20°C)7,0 A 7,6
 VOLUME RESISTIVITY AT 250°C.....106,5 X 107 OHMS
 DIALECTRIC STRENGTH.....4500 KV/CM
 THERMIC DIFUSSION.....0,005 CM2/SEG

TESTS PERFORMED IN CERTIFIED LABORATORIES

UNE-EN-ISO 10545-2: SURFACE RESISTANCE
UNE-EN-ISO 10545-3: WATER ABSORPTION
UNE-EN-ISO 10545-11: CRAZING RESISTANCE
UNE-EN-ISO 10545-13: CHEMICAL RESISTANCE

UNE-EN-ISO 10545-14: RESISTANCE TO STAINING
UNE-ENV 12633 (CLASE II, CLASE III): ANTI-SLIP RESISTANCE
DIN- ANTISLIP 51097: ANTI-SLIP RESISTANCE
UNE-EN-ISO 10545-7: ABRASION RESISTANCE

PACKING

MESH · PAPER

size	sheet		box			pallet		
	pieces	size	sheets	sq.ft	lbs	cartons	sq.ft	lbs
25x25 mm	144	315x315 mm (Approx)	20	2	18	63	126	1.134
1"x1"	144	12 ¹ / ₂ " x 12 ¹ / ₂ "	20	21 ¹ / ₂ "	39,68	63	1.356	2.500
12x12 mm	529	309x309 mm	10	1	9	126	126	1.134
0.5"x0.5"	529	12 ¹ / ₂ " x 12 ¹ / ₂ "	10	10 ¹ / ₂ "	19.84	126	1.356	2.500
38x38 mm	64	315x315 mm (Approx)	20	2	20	63	126	1.260
1.5"x1.5"	64	12 ¹ / ₂ " x 12 ¹ / ₂ "	20	21 ¹ / ₂ "	44.08	63	1.356	2.780
50x50 mm	36	315x315 mm (Approx)	20	2	20	63	126	1.260
2"x2"	36	12 ¹ / ₂ " x 12 ¹ / ₂ "	20	21 ¹ / ₂ "	44.08	63	1.356	2.780
25x75 mm	48	315x315 mm (Approx)	10	1	9	126	126	1.134
1"x3"	48	12 ¹ / ₂ " x 12 ¹ / ₂ "	10	10 ¹ / ₂ "	19.84	126	1.356	2.500

PUNTOS / DOTS

formato - size	sheet		box			pallet		
	pieces	size	sheets	sq.ft	lbs	cartons	sq.ft	lbs
25x25 mm	180	315x396 mm	16	2	18	72	144	1.296
1"x1"	180	12 ¹ / ₂ " x 15 ¹ / ₂ "	16	21 ¹ / ₂ "	39,68	72	1.550	2.587

AQUABLU

Official Distributor

(800) 971 1442

www.aquablumosaiics.com