


MSI

Making Dream Surfaces Attainable

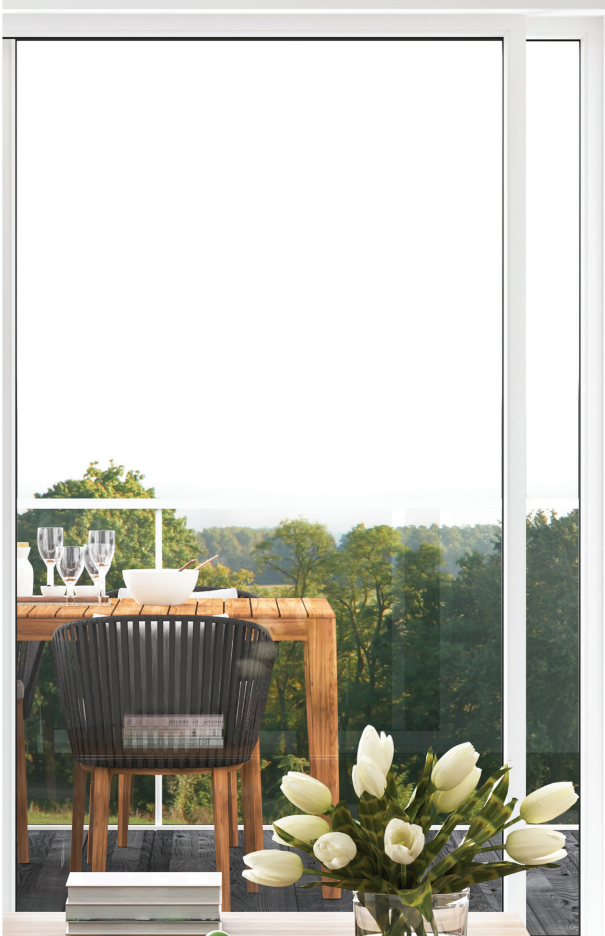

Kaya

Porcelain Collection

AQUABLU

Official Distributor

(800) 971 1442

www.aquablumosaics.com

Colors




Calacatta Lucca 12"x24"



Calacatta Venato 12"x24"



Carrara Bianco 12"x24"

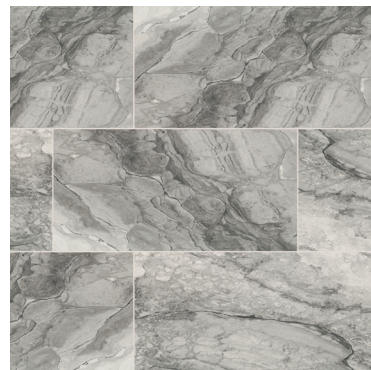

Onda Gray 12"x24"

Size	Thickness	CALACATTA LUCCA	CALACATTA VENATO	CARRARA BIANCO	ONDA GRAY
12x24 Matte	3/8"	NKAYCALLUC1224	NKAYCALVEN1224	NKAYCARBIA1224	NKAYONDGRA1224
12x24 Polished	3/8"	NKAYCALLUC1224P	NKAYCALVEN1224P	NKAYCARBIA1224P	NKAYONDGRA1224P
24x24 Matte	3/8"	NKAYCALLUC2424	NKAYCALVEN2424	NKAYCARBIA2424	NKAYONDGRA2424
24x24 Polished	3/8"	NKAYCALLUC2424P	NKAYCALVEN2424P	NKAYCARBIA2424P	NKAYONDGRA2424P
24x48 Matte	3/8"	NKAYCALLUC2448	NKAYCALVEN2448	NKAYCARBIA2448	NKAYONDGRA2448
24x48 Polished	3/8"	NKAYCALLUC2448P	NKAYCALVEN2448P	NKAYCARBIA2448P	NKAYONDGRA2448P
3x24 Matte	3/8"	NKAYCALLUC3X24BN	NKAYCALVEN3X24BN	NKAYCARBIA3X24BN	NKAYONDGRA3X24BN
3x24 Polished	3/8"	NKAYCALLUC3X24BNP	NKAYCALVEN3X24BNP	NKAYCARBIA3X24BNP	NKAYONDGRA3X24BNP
3X3 Matte	3/8"	NKAYCALLUC3X3	NKAYCALVEN3X3	NKAYCARBIA3X3	NKAYONDGRA3X3

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V3	Matte < 0.42 Polished < 0.42	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL			●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Inspired by a style architects have used for centuries, the Kaya Collection is chic and timeless. This stunning series of tiles delivers the luxurious elegance of natural marble with the durability and performance porcelain of porcelain. The tiles are available with matte and polished finishes for design variation. Select from four different colors and 12" x 24", 24" x 24", and 24" x 48" mosaic with bullnose accessories to create your perfect space.

Technical Information

Primary Colors: White, Gray

Material Type: Porcelain

Finish: Matt & Polished

Polished: Hardness / Mohs 5

Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade.

Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

Features At A Glance

- Available in Matte and Polished finish
- Create stunning floors, feature walls, and fireplace walls, while also the perfect choice for facades, facings, and other outdoor feature

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

