


# MSI

Making Dream Surfaces Attainable

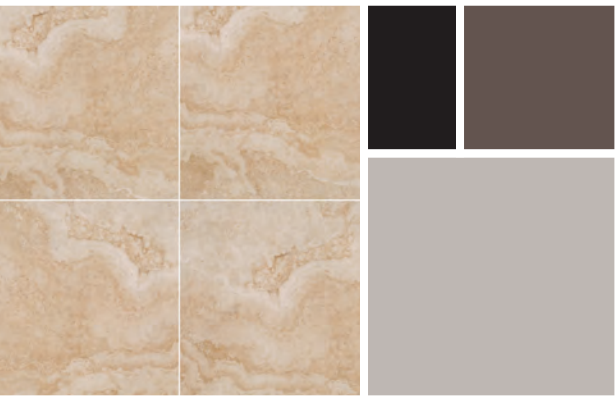

**AQUABLU**

Official Distributor

(800) 971 1442

[www.aquablumosaics.com](http://www.aquablumosaics.com)



**ARTERRA**<sup>®</sup>

Premium Porcelain Pavers



Argento Travertino



Beton Antracite



Beton Blanco




Beton Grey




Beton Sand



Bluestone




Caldera Blanca



Caldera Coala



Caldera Grigia



Concerto Grigio




Fossil Snow



Golden White



Livingstyle Beige



Livingstyle Cream




Livingstyle Pearl



Lucas Betulla



Lucas Canitia



Mystique Multicolor




Palmwood Gris




Palmwood Walnut




Pedra Azul



Petra Beige



Praia Carrara



Praia Crema




Praia Grey



Quarzo Gray



Terrazo Glacier




Terrazo Gris




Tierra Beige




Tierra Ivory



True Bluestone



Vulkon Grey




Vulkon Nero

## PAVER SIZES AVAILABLE (ALL 2CM THICK)



24" x 24"



Pattern

- (1) 24" x 24"
- (1) 12" x 24"
- (2) 12" x 12"



16" x 32"



16" x 47"



18" x 36"




12" x 48"

## COPINGS

13" X 24" 2cm  
BULLNOSE COPING

13" X 24" 3cm  
BULLNOSE COPING

13" X 24" 3cm  
EASED EDGE COPING

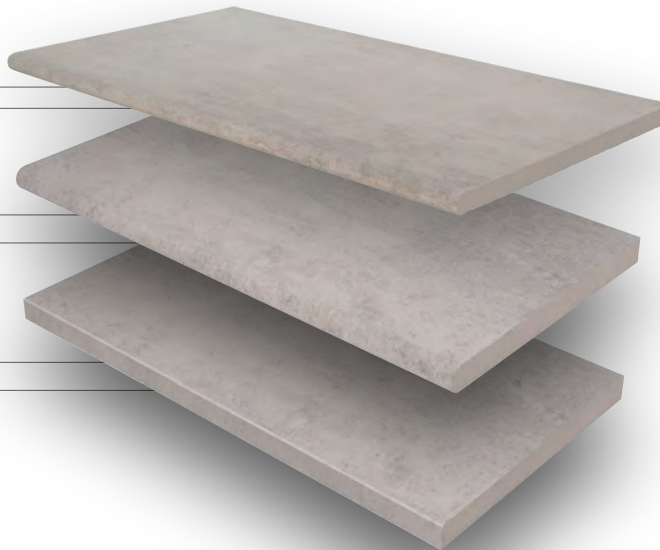

**Low maintenance** – Easy to clean with a water hose or pressure washer.



**Strong** – Superior strength and impact resistance.



**High wear rating** – The glazed surface is fired at 1200° F, ensuring a hard surface that is resistant to wear.



**Freeze Thaw Resistant** – MSI Porcelain Pavers are virtually impervious to water and the properties don't change with temperature, thereby making the pavers freeze thaw resistant.



**Stain resistant** – Because of its extremely low moisture absorption, MSI Porcelain Pavers have a high resistance to stains.






**Slip Resistant** – The surface texture is designed to have a high slip resistance, even when wet.



**UV Resistant** – The glazed surface is baked on, ensuring the color will remain intact even after years of being in the sun.

NAME	THICKNESS	SIZE	PAVER ID'S	13X24 COPING ID'S	MATCHING INDOOR TILE AVAILABLE
Argento Travertino	2cm	16x32/24x24	LPAVNARGTRA1632	LCOPNARGTRA1324	
			LPAVNARGTRA2424		
Beton Antracite	2cm	24x24	LPAVNBETANT2424	LCOPNBETANT1324	
Beton Blanco	2cm	24x24	LPAVNBETBLA2424	LCOPNBETBLA1324	
Beton Grey	2cm	16x32/24x24	LPAVNBETGRE1632	LCOPNBETGRE1324	
			LPAVNBETGRE2424	LCOPNBETGRE1324-ROU3CM	
				LCOPNBETGRE1324-EAS3CM	
Beton Sand	2cm	24x24	LPAVNBETSAND2424		
Bluestone	2cm	24x24/Pattern	LPAVNBELUSTO2424	LCOPNBELUSTO1324	
			LPAVNBELUSTOPAT		
Caldera Blanca	2cm	16x47	LPAVNCALBLA1647	LCOPNCALBLA1324	NCALBLA8X47
Caldera Coala	2cm	16x47	LPAVNCALCOA1647	LCOPNCALCOA1324	NCALCOA8X47
Caldera Grigia	2cm	16x47	LPAVNCALGRI1647	LCOPNCALGRI1324	NCALGRI8X47
Concerto Grigio	2cm	24x24/18x36	LPAVNCONGRI2424	LCOPNCONGRI1324	NCONGRI2424
					NCONGRI1836
					NCONGRI2X24BN
Fossil Snow	2cm	Pattern	LPAVNFOSNOPAT	LCOPNFOSNO1324	
Golden White	2cm	24x24	LCOPNFOSNO1324	LCOPNGOLWHI1324	
Livingstyle Beige	2cm	24x24/18x36	LPAVNLIVBEI2424	LCOPNLIVBEI1324	NLIVSTYBEI2424
			LPAVNLIVBEI1836		NLIVSTYBEI1836
Livingstyle Cream	2cm	24x24/18x36	LPAVNLIVCRE2424	LCOPNLIVCRE1324	NLIVSTYBEI2X24BN
			LPAVNLIVCRE1836		NLIVSTYCRE2424
					NLIVSTYCRE1836
					NLIVSTYCRE2X24BN
Livingstyle Pearl	2cm	24x24/18x36	LPAVNLIVPEA2424	LCOPNLIVPEA1324	NLIVSTYPEA2424
			LPAVNLIVPEA1836		NLIVSTYPEA1836
					NLIVSTYPEA2X24BN
Lucas Betulla	2cm	12x48	LPAVNLUCBET1248	LCOPNLUCBET1324	
Lucas Canitia	2cm	12x28	LPAVNLUCCAN1324	LCOPNLUCANI1324	
Mystique Multicolor	2cm	24x24	LPAVNMYSMUL2424	LCOPNMYSMUL1324	
Palmwood Gris	2cm	24x24	LCOPNMYMUL1324	LCOPNPALGRI1324	
Palmwood Walnut	2cm	24x24	LPAVNPALWAL2424	LCOPNPALWAL1324	
Pedra Azul	2cm	24x24	LPAVNPEDAZU2424	LCOPNPEDAZU1324	
Petra Beige	2cm	12x24/24x24	LPAVNPETBEI1224	LCOPNPETBEI1324	
			LPAVNPETBEI2424	LCOPNPETBEI1324-ROU3CM	
				LCOPNPETBEI1324-EAS3CM	
Praia Carrara	2cm	24x24	LPAVNPRACAR2424	LCOPNPRACAR1324	NPRACAR1224
					NPRACAR2448
					NPRACAR2X2
Praia Crema	2cm	16x32/24x24	LPAVNPRACRE1632	LCOPNPRACRE1324	NPRACAR3X24BN
			LPAVNPRACRE2424		NPRACRE1224
					NPRACRE2448
					NPRACRE2X2
					NPRACRE3X24BN
Praia Grey	2cm	16x32/24x24	LPAVNPRAGRE1632	LCOPNPRAGRE1324	NPRAGRE1224
			LPAVNPRAGRE2424		NPRAGRE2448
					NPRAGRE2X2
					NPRAGRE3X24BN
					NPRAGRE3X24BN
Quarzo Gray	2cm	24x24	LPAVNQUAGRA2424	LCOPNQUAGRA1324	
				LCOPNQUAGRA1324-ROU3CM	
				LCOPNQUAGRA1324-EAS3CM	
Terrazo Glacier	2cm	24x24	LPAVNTERGLA2424	LCOPNTERGLA1324	
Terrazo Gris	2cm	24x24	LPAVNTERGRI2424	LCOPNTERGRI1324	
Tierra Beige	2cm	24x24	LPAVNTIEBEI2424	LCOPNTIEBEI1324	
Tierra Ivory	2cm	12x24/24x24	LPAVNTIEIVO1224	LCOPNTIEIVO1324	
			LPAVNTIEIVO2424		
True Bluestone	2cm	24x24/24x48	LPAVNTRUBLU2424		
			LPAVNTRUBLU2428		
Vulkon Grey	2cm	24x24	LPAVNVULGRE2424	LCOPNVULGRE1324	
Vulkon Nero	2cm	24x24	LPAVNVULNER2424	LCOPNVULNER1324	

APPLICATIONS	Flooring	Thermal Shock	Stain Resistance	Abrasion Resistance/ PEI Rating	Variation/ Color Uniformity	Slip Resistance/ Coefficient of Friction	Freeze/Thaw	Breaking Strength	Water Absorption	Hardness	Chemical Resistance	Solar Reflectance Index (SRI)
RESIDENTIAL		Pass	Pass	IV	V3	DCOF - > 0.42 Wet	Resistant	> 2000 lbs	< 0.5%	6	Resistant	32-74
LIGHT COMMERCIAL												
HEAVY COMMERCIAL												

**Technical Information**

Material Type: Glazed Porcelain  
Finish: Matte

**Mortar Set Install:** It is mandatory that the mortar coverage on the floor surface and paver be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

**Disclaimer : Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade.

Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.

