

Micro Swiss NG™ Direct Drive Extruder for Creality Ender-3 Neo

INSTALLATION INSTRUCTIONS

TOOLS NEEDED

Gather the required tools before starting the installation

- Phillips-Head Screwdriver
- Flat Head Screwdriver
- Exacto Knife or Utility Knife
- 3.0mm Allen wrench
- 2.5mm Allen wrench
- 2.0mm Allen wrench
- 1.5mm Allen wrench (included with the kit)
- 8mm spanner wrench
- 10mm spanner wrench
- Flush cutters



WHAT'S IN THE BOX

- | | |
|--------------------------------|---|
| 1x Master Extruder Assembly | 1x Eccentric nut |
| 1x Adaptation plate | 1x M5 x .8 x 30mm Cap Screw |
| 1x LDO Stepper motor | 1x 5mm ID 10mm OD Washer |
| 1x Fan Shroud | 1x M5 x .8 Nylon Lock Nut |
| 1x Custom extension cable | 2x M5 x .8 x 20mm Nylon Patch Cap Screw |
| 1x All Metal Hotend assembly | 4x M2.2 x 8mm Thread Forming Screw |
| 1x 3D printed CR-Touch Bracket | 4x M3 x 12mm Thread Forming Screw |
| | 1x 7mm spanner Wrench |
| | 1x 1.5mm Allen Wrench |
| | 5x Zip Ties |



PREPARATION



- Remove the filament from your original hotend and allow the printer to cool down completely

STEP 1 - SAFETY



- Make sure the hotend and bed have cooled down to room temperature before starting any work on the 3D printer

⚠ For your safety, turn off and unplug your printer



STEP 2 - REMOVE THE ORIGINAL FAN SHROUD

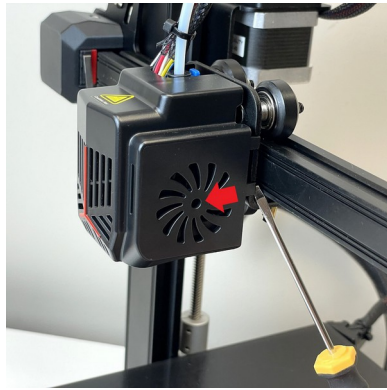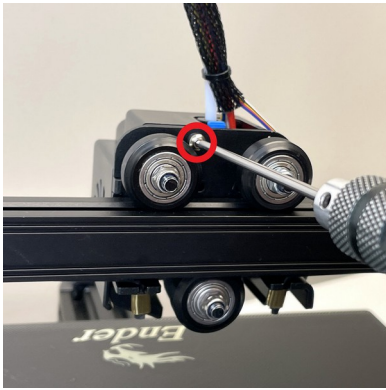

- Remove the single M3 screw holding the fan shroud in the back of the carriage plate (2.0mm Allen wrench)
- Pull the fan shroud off while lightly prying back the plastic tabs holding it in place (Flat-head screw driver)
- Cut the zip ties holding the cables and Bowden tube together (Flush cutters)

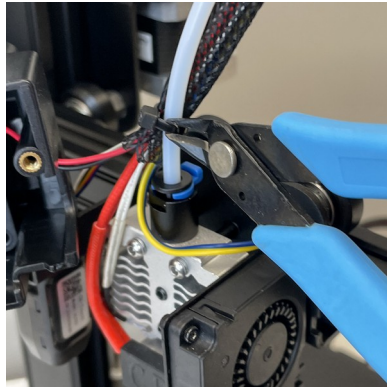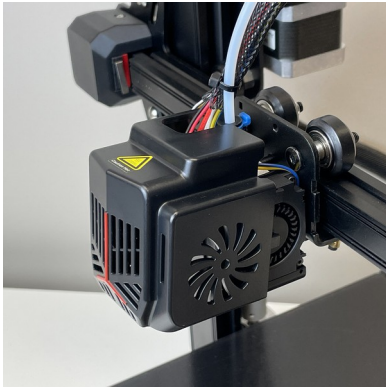


STEP 3 - UNFASTEN THE FANS

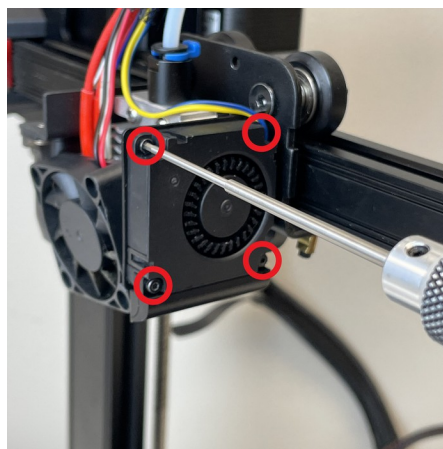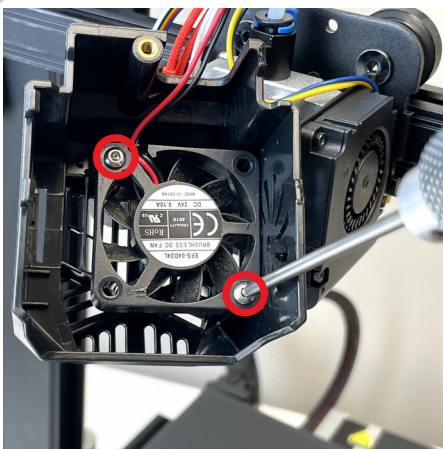

- Remove the two screws holding the hotend fan (2.0mm Allen wrench)
- Remove the four screws holding the part cooling fan (1.5mm Allen wrench)


STEP 4 - REMOVE THE SILICONE SOCK

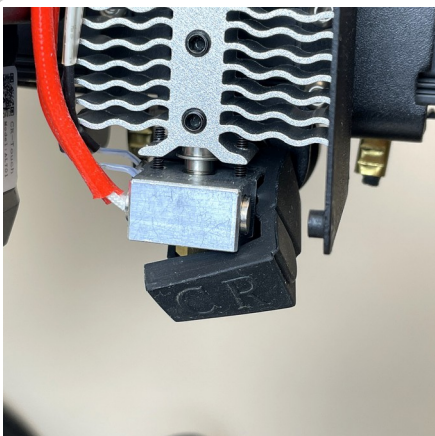

Make sure the hotend is at room temperature before touching the heater block


- Pull the silicone sock off of the heater block

STEP 5- UNFASTEN THE CR-TOUCH

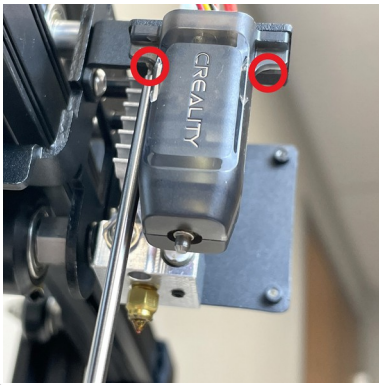



- Remove the two screws holding the CR-Touch (2.0mm Allen wrench)

STEP 6 - UNFASTEN THE HOTEND

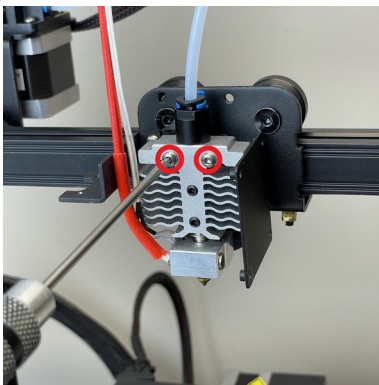


- Remove the two screws holding the hotend on the carriage plate (2.0mm Allen wrench)

STEP 7 - REMOVE THE THERMISTOR AND HEATER CARTRIDGE

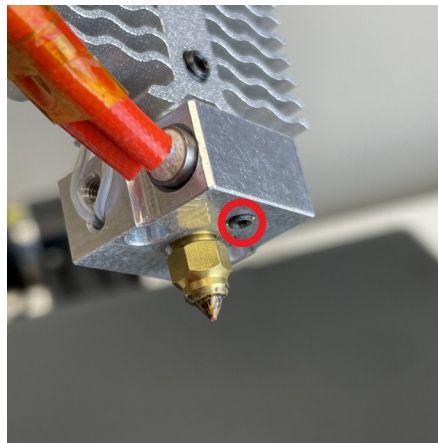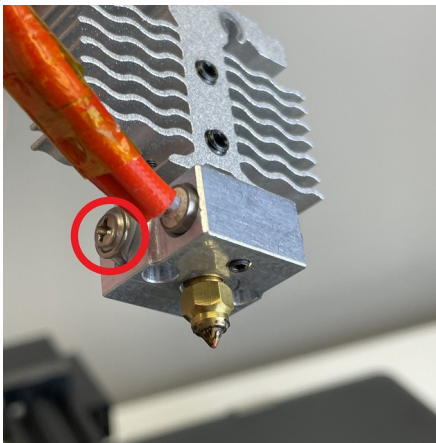


Glass Bead Thermistor:

- Remove the Phillips screw holding the thermistor wires (Phillips-head screwdriver)
- Loosen the set screw holding the heater cartridge (1.5mm Allen wrench)
- Pull the heater cartridge and thermistor out of the heater block

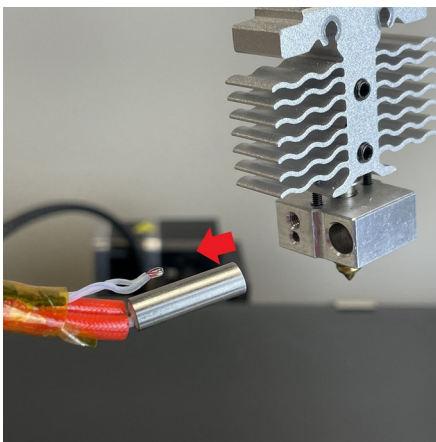


STEP 8 - DISCONNECT THE PTFE TUBE FROM THE HOTEND

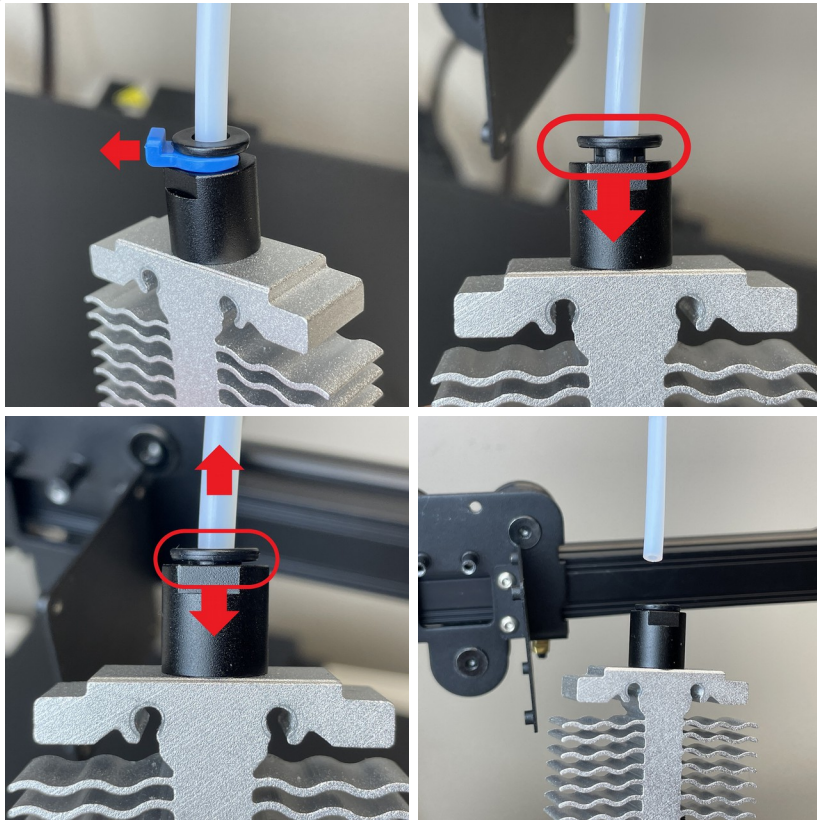


- Pull the blue C-clip out
- While pressing the black Bowden collet down towards the cooling block, pull the PTFE tube out

STEP 9 - DETACH THE BELT

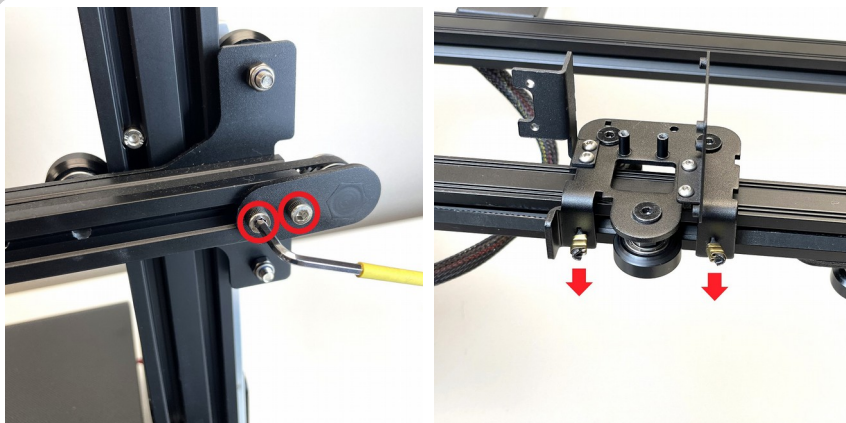

- Loosen the two screws holding X-axis belt tensioner (3.0mm Allen wrench)
- Pull both ends of the belt out from the slots in the carriage plate


STEP 10 - REMOVE THE ROLLER WHEELS AND CARRIAGE PLATE

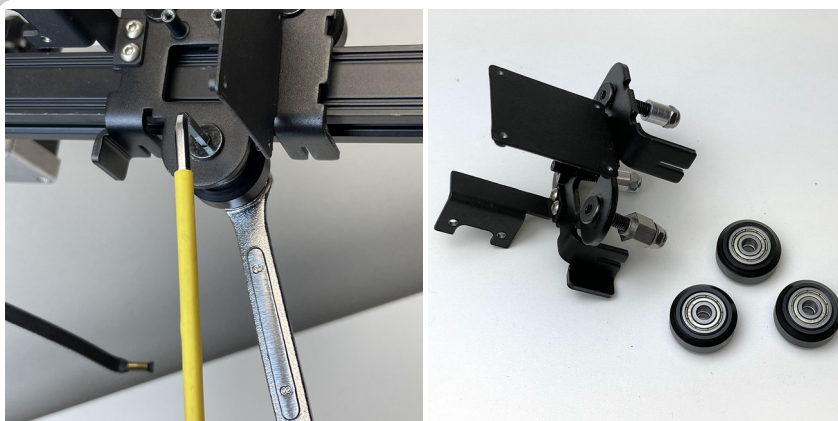

- Remove the M5 screws and nut holding the three V-roller wheels (8mm wrench + 3.0mm Allen wrench)


The V-roller wheels will be reused in the new print head

STEP 11 - REMOVE THE ORIGINAL EXTRUDER

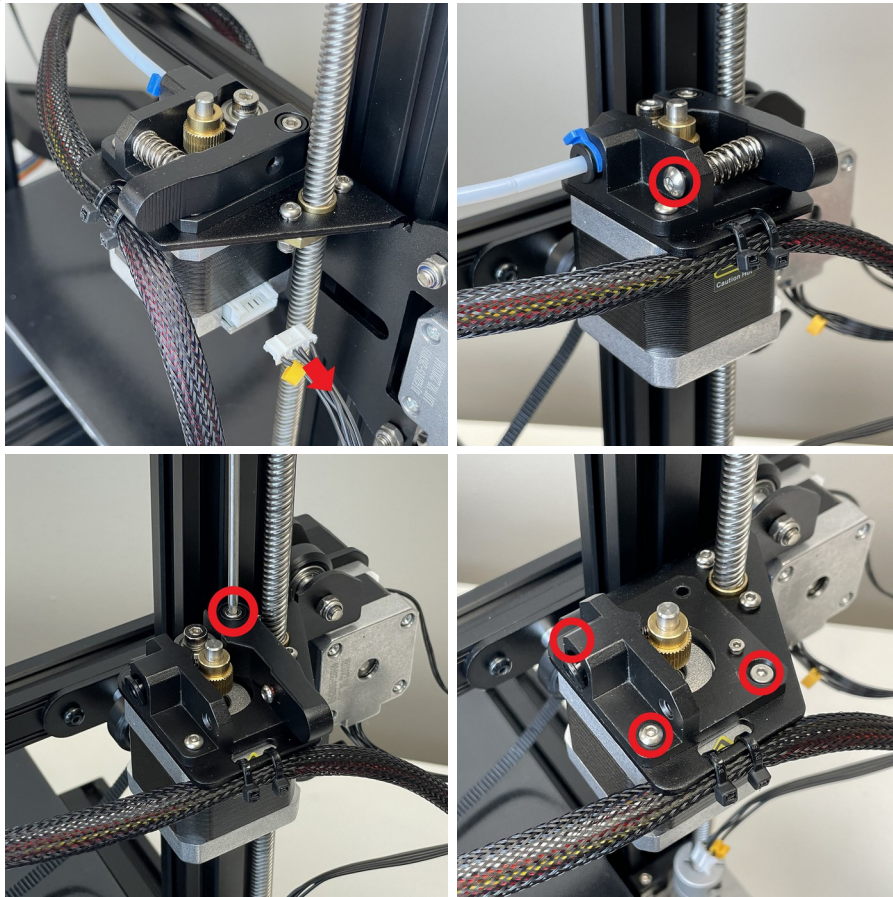




- Disconnect the cable from the stepper motor
- Unscrew the screw holding the spring in place (2.5mm Allen wrench)
- Unscrew the plastic extruder arm (2.5mm Allen wrench)
- Remove the screws holding the extruder body and stepper motor together (2.0mm Allen wrench)

STEP 12 - PREPARE THE NG EXTRUDER FOR INSTALLATION

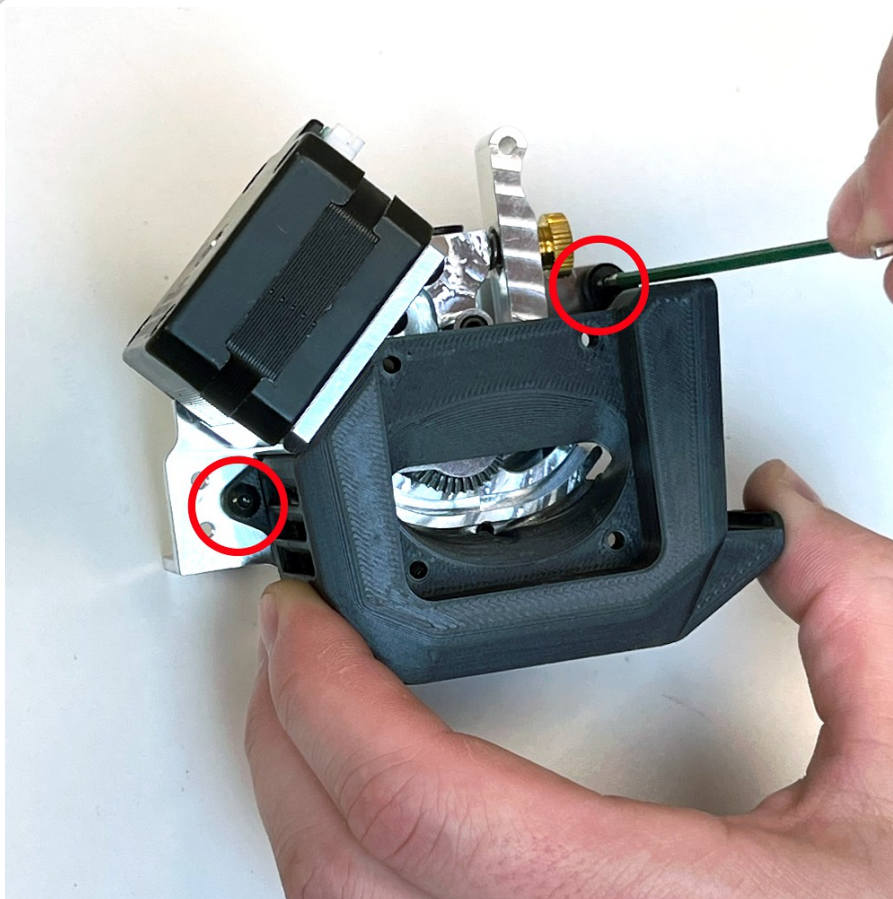





- Prepare the NG Extruder assembly by removing the 3D printed fan shroud (2.0mm Allen wrench)

STEP 13 - INSTALL THE ECCENTRIC NUT AND BOTTOM WHEEL

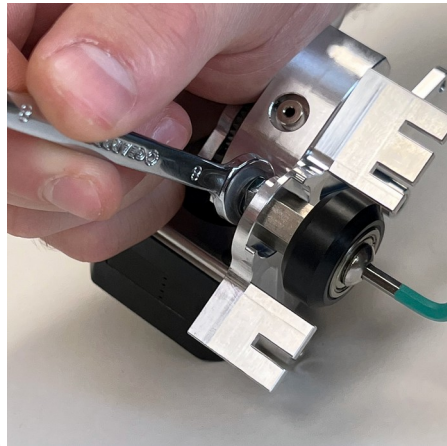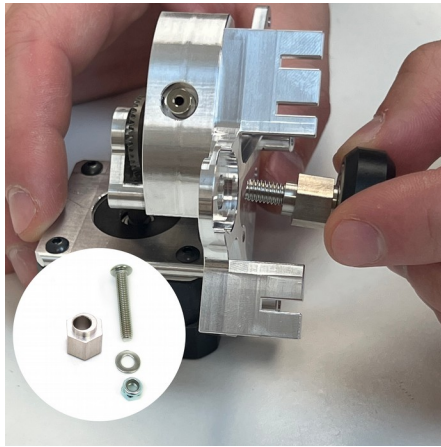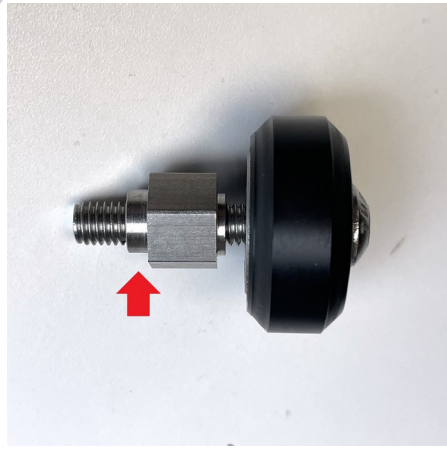


- Insert the longer M5 screw provided with the kit into one of the V-roller wheels
- Place the eccentric nut onto the M5 screw above the wheel
Note the correct orientation – the longer boss should face away from the roller
- Insert the end of the M5 screw onto the large hole at the bottom of the adaptation plate
- Place the washer onto the end of the M5 screw
- Install and tighten the lock nut onto the end of the M5 screw, securing the whole assembly in place.
(3.0mm Allen wrench and 8mm spanner wrench)

STEP 14 - INSTALL THE TOP TWO WHEELS

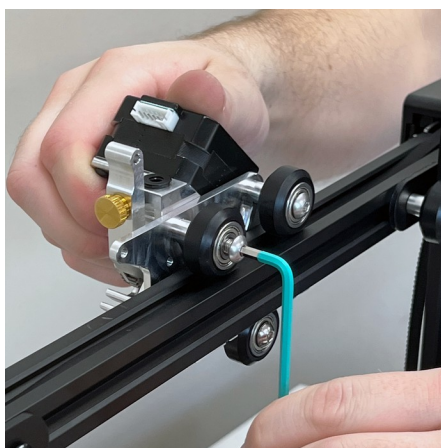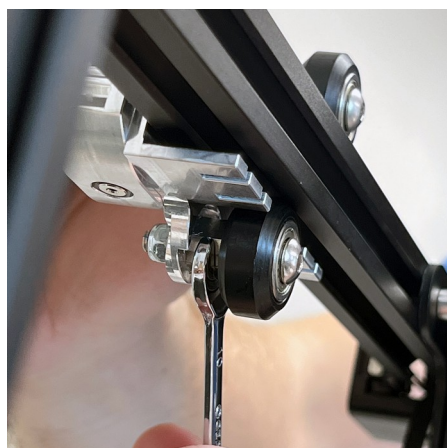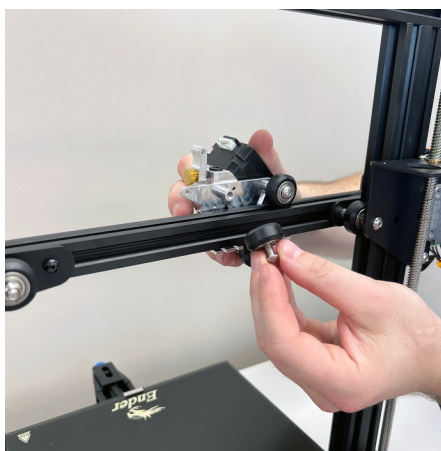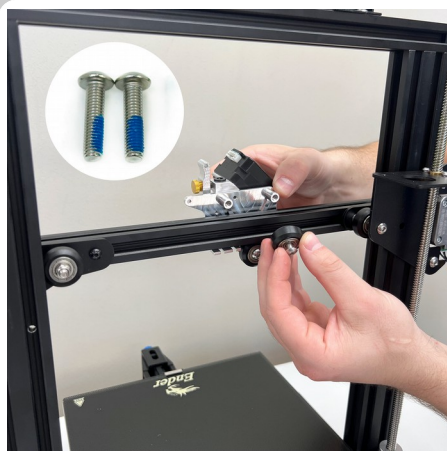

- Insert the shorter two M5 screws into the two remaining V-Roller wheels
Make sure to use the provided nylon patched screws
 - While holding the new extruder assembly in front of the 3D printer's X axis aluminum extrusion, install the remaining two wheels/screws.
(3.0mm Allen wrench)
- If it is difficult to fit the last V-roller wheel, adjust the bottom V-roller position by rotating the eccentric nut using a 10mm wrench*



STEP 15 - ADJUST THE WHEEL TENSION

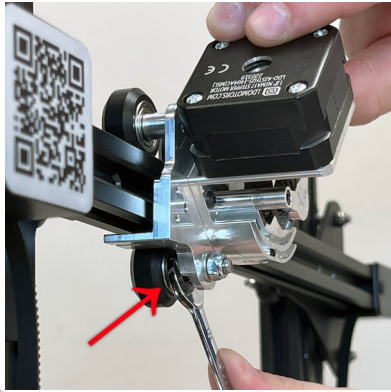

- Adjust the eccentric nut on the bottom wheel to eliminate any carriage wobble (10mm spanner wrench)

There should be no play/wobble in any of the wheels, but the tension should still be low enough that you can make each individual wheel slip/rotate using your finger while holding the carriage in place


STEP 16 - ATTACH THE BELT

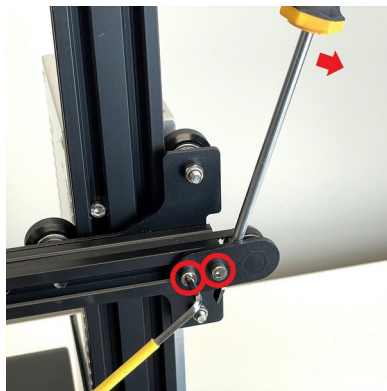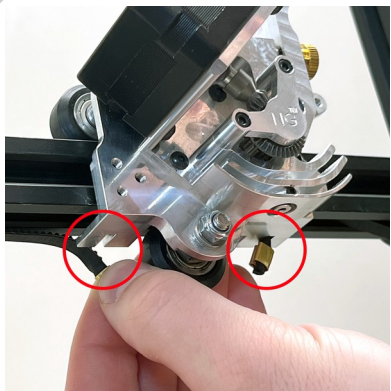

- Insert the ends of the belt into the slots at the bottom of the adaptation plate
- Retighten the X-axis belt tensioner while prying the pulley to add tension to the belt (Flat-head screwdriver and 3.0mm Allen wrench)

Move the carriage side to side by hand to verify the belt is seated properly

STEP 17 - ATTACH THE HOTEND

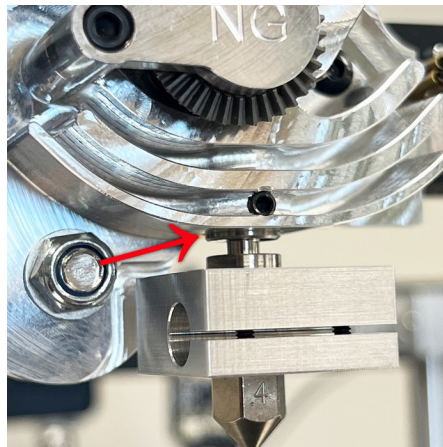


- Attach the hotend assembly to the extruder

Verify that the thermal break is seated as deep as possible inside of the extruder (compare with reference image on the left)


- Tighten the grub screw until its snug (1.5mm Allen wrench)
Be careful to not over-tighten set screw

The included nozzle has already been preheated and tightened to spec at the factory

The nozzle replacement procedure can be found on the last pages of this document

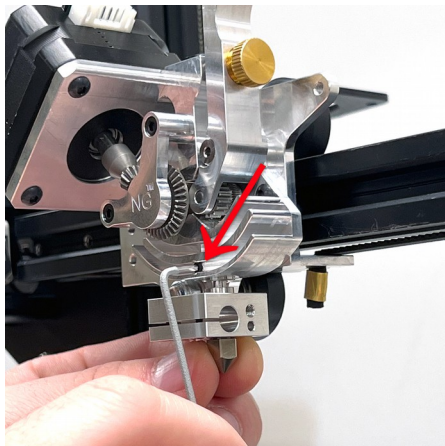


STEP 18 - INSTALL THE THERMISTOR AND HEATER CARTRIDGE

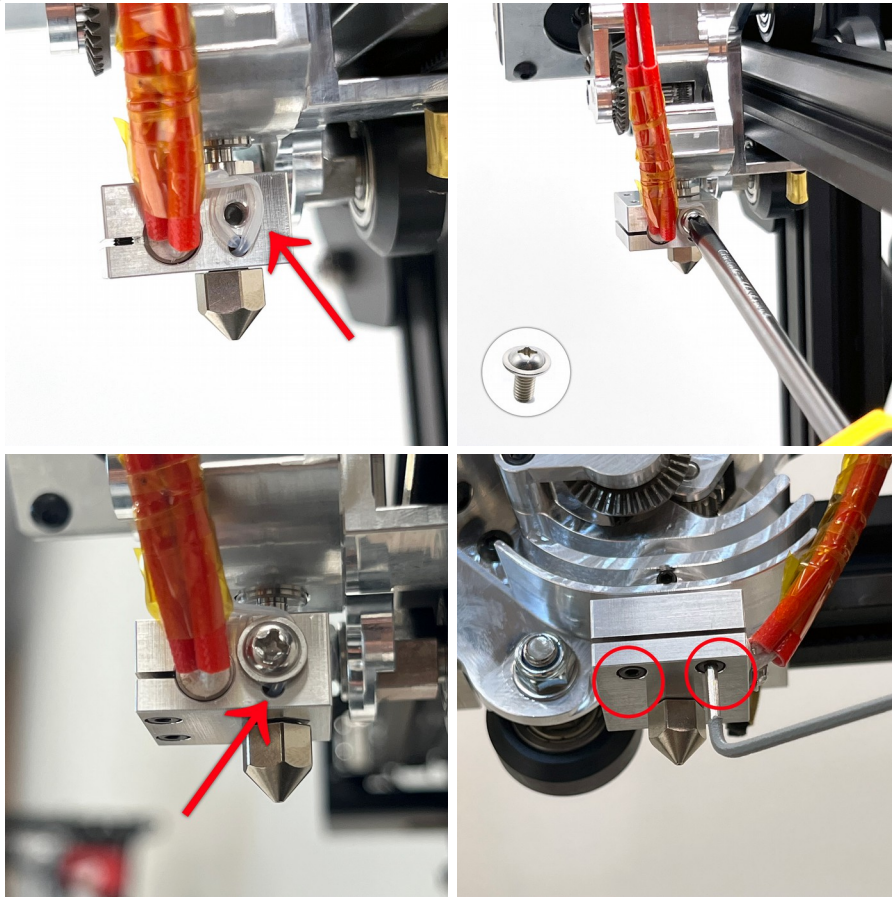


- Insert the heater cartridge and thermistor into the heater block
- Make sure the thermistor is fully seated inside of the heater block
- Lightly tighten the Phillips screw to secure the thermistor wires in place (Phillips-head screwdriver)
Be careful to not over-tighten the screw as this can damage the delicate wires
- Secure the heater cartridge in place by tightening the two screws at the bottom of the heater block (1.5mm Allen wrench)

STEP 19 - INSTALL THE SILICONE SOCK

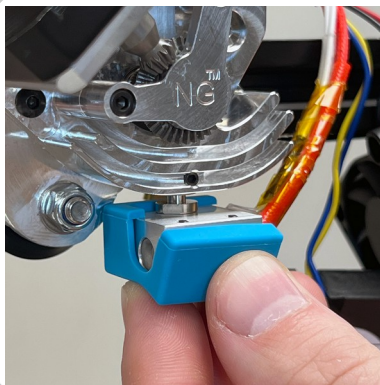


- Place the silicone sock on the heater block

STEP 20 - INSTALL THE FANS

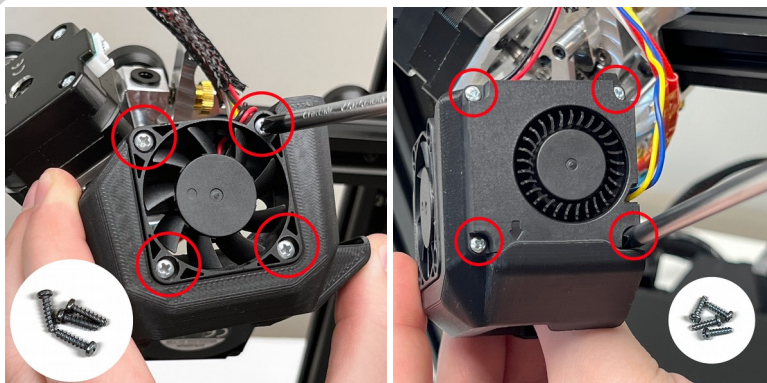


- Attach the hotend cooling fan to the front of the 3D printed fan shroud using the larger self-tapping screws provided with the kit (Phillips-head screwdriver)
- Attach the part cooling fan to the side of the fan shroud using the smaller self-tapping screws (Phillips-head screwdriver)

STEP 21 - INSTALL THE FAN SHROUD

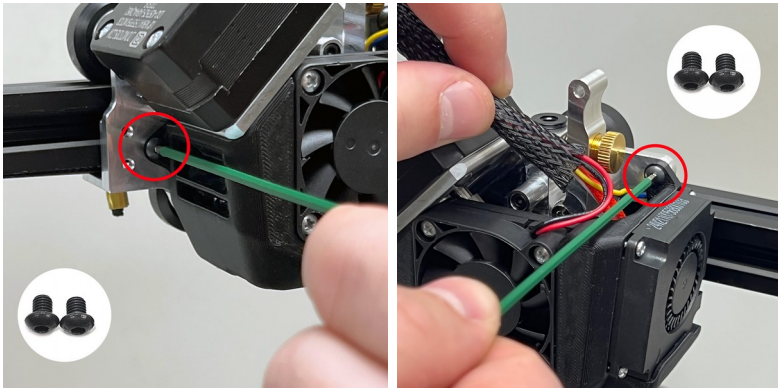


- Re-attach the fan shroud to the extruder using two screws (2.0mm Allen wrench)

STEP 22 - INSTALL THE CR-TOUCH

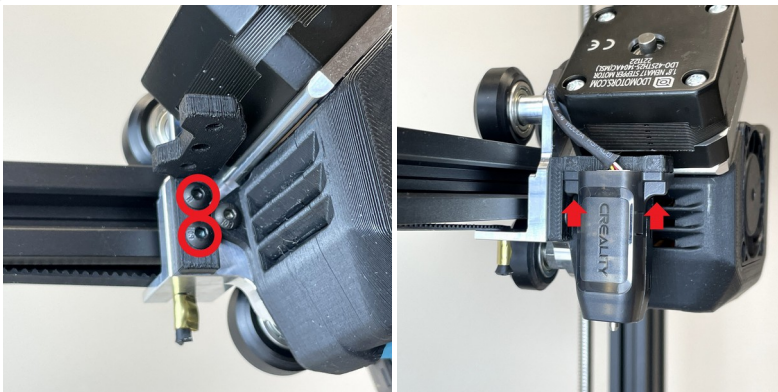


- Attach the 3D printed probe bracket using two M3 screws (2.0mm Allen wrench)
- Attach the CR-Touch to the 3D printed bracket using two M3 screws (2.0mm Allen wrench)


STEP 23 - INSTALL THE FILAMENT GUIDE TUBE

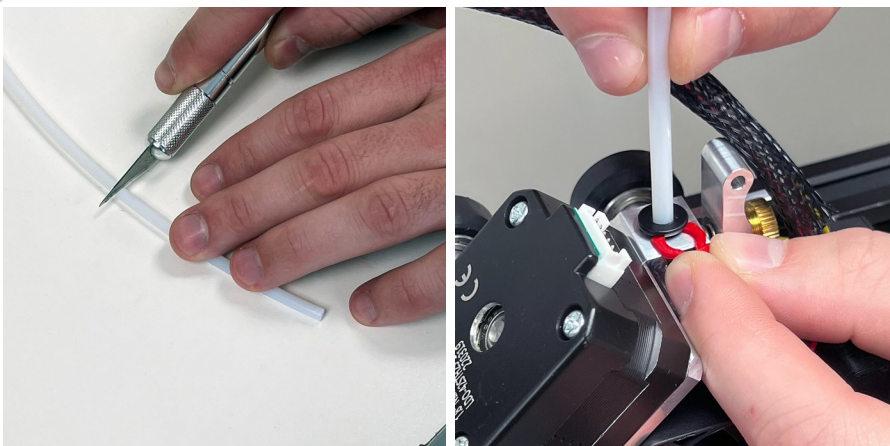

- Cut about 2.5" of PTFE tubing from the original Bowden tube that was previously removed
- Insert the PTFE tube into the top of extruder
- Secure the PTFE tube in place by inserting the red C-clip underneath the black Collet

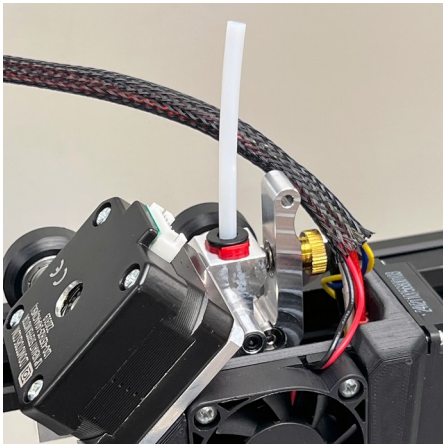



STEP 24 - INSTALL THE CUSTOM EXTENSION CABLE

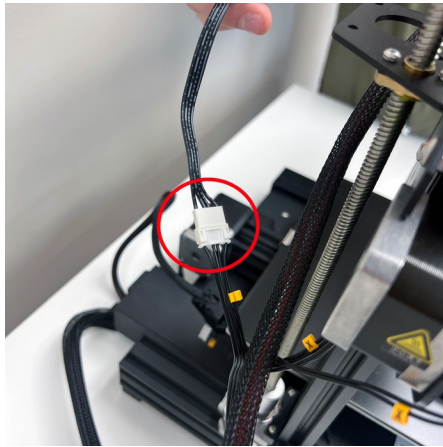


Use the custom extension cable provided with the NG kit - it has the special wiring pinout that is required to connect the LDO motor to a Creality 3D printer

- Connect one end of the NG extension cable to the 3D printer's original E cable
- Connect the other end of the NG extension cable to the LDO stepper motor

Make sure to give the extension cable some slack near the stepper motor in order to avoid straining the connector

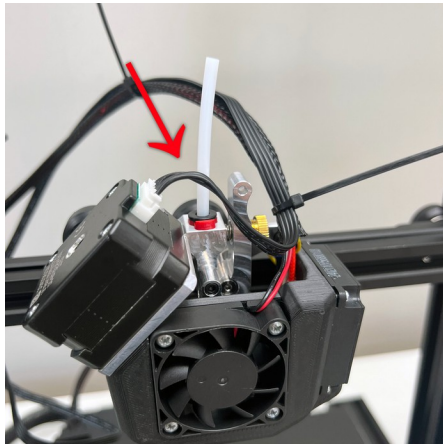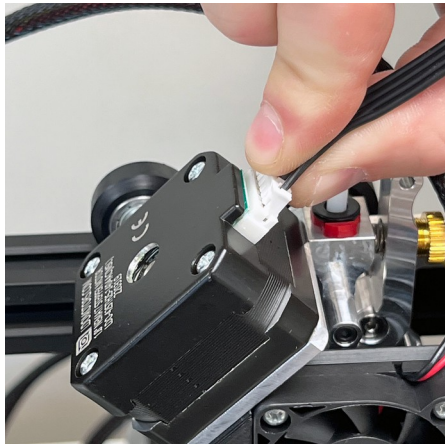


STEP 25 - CABLE MANAGEMENT

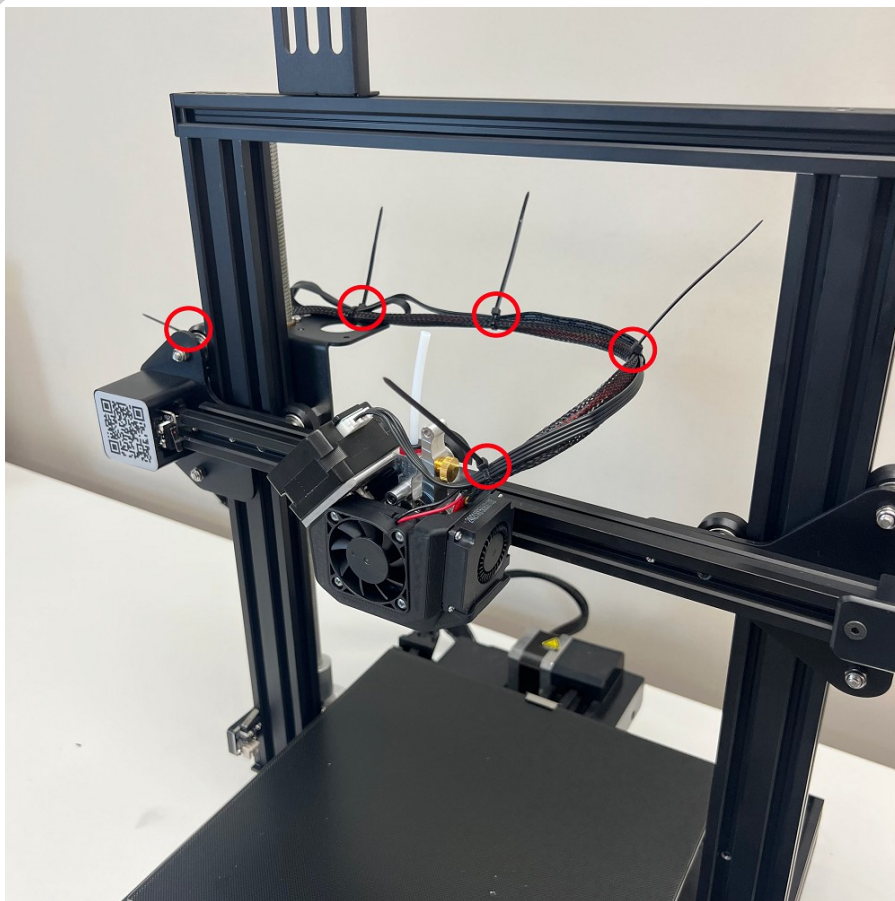


- Use the provided zip ties to manage your cables neatly

STEP 26 - MOVE THE FILAMENT HOLDER

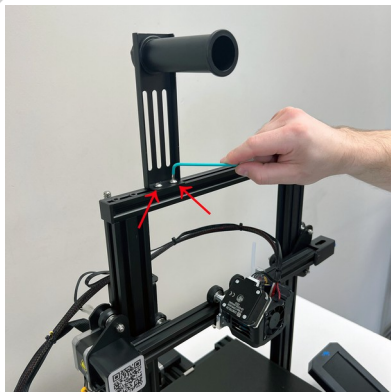

- Loosen the two screws holding the filament spool holder (3.0mm Allen wrench)
- Reposition the spool holder so that the spool hangs in front of the frame
- Re-tighten the two screws to secure the spool holder (3.0mm Allen wrench)

STEP 27 - ADJUST THE GEAR TENSION

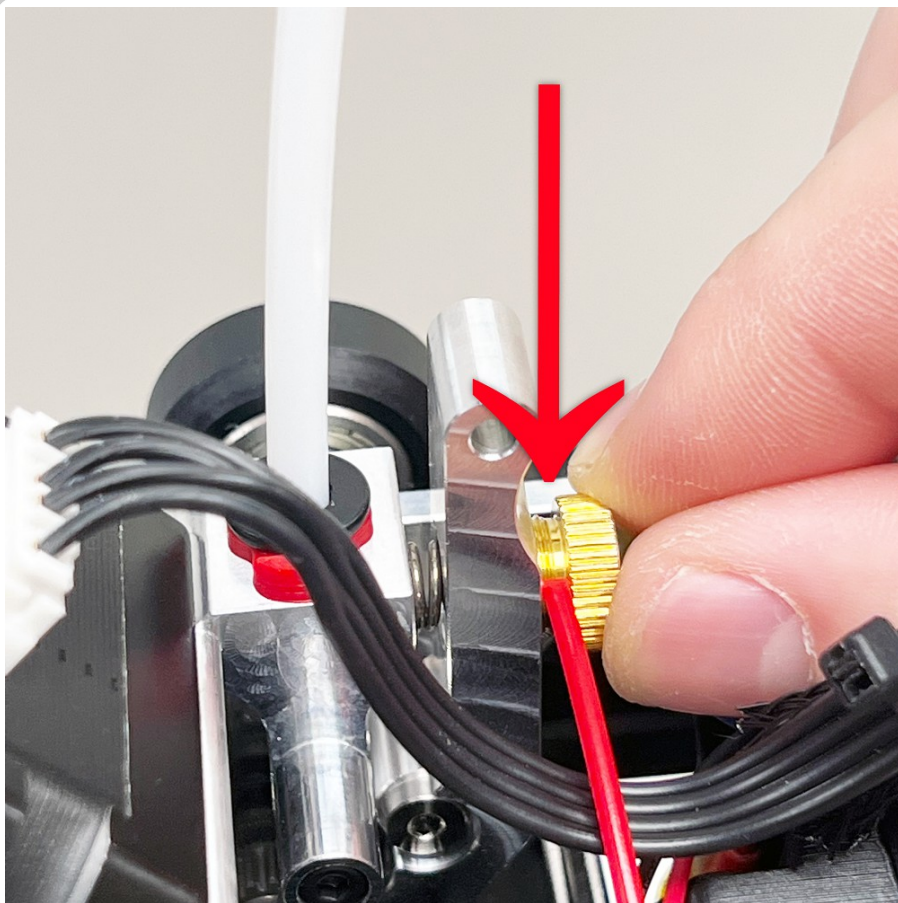


- Adjust the drive gear tension by rotating the brass knob

The gear tension can be gauged by measuring how much of the brass knob's threads are exposed (Gap between the head of the brass knob to the aluminum extruder arm)

The good starting point for stiff filaments such as PLA, PTEG, ABS is 1.75mm of exposed threads. (Use a piece of 1.75mm filament as a gauge as shown in the image on the left)

For flexible filaments such as TPU, loosen the knob until about 2.75mm of the threads are exposed. (Loosen the knob two full turns, if starting with a 1.75mm gap)

STEP 28 - POWER ON THE 3D PRINTER

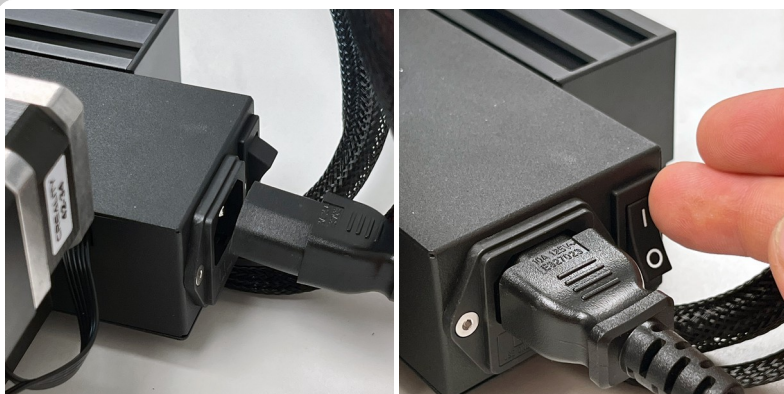

- Plug the power cable in and turn the 3D printer on

STEP 29 - UPDATE THE ESTEPS



The E-steps will need to be set to 400 in the printer settings by printing a g-code file

- Download the Esteps G-code from the link below

[Download](#)

- Save the file onto your SD card
- “Print” the Esteps G-code file

The gcode should take about 15 seconds to finish printing. It will not produce a 3D printed object and will not give a confirmation that it was successful so just give it time to complete before moving on.

STEP 30 - UPDATE THE HOME OFFSETS



- Download the HomeOffsets gcode from the link below

[Download](#)

- Save the file onto your SD card
- “Print” the Home Offsets G-code file

This file is specifically for the **Ender 3 Neo** - do not use this file on an Ender 3 V2 Neo or Ender 3 Max Neo

STEP 31 - CONFIGURE SLICER SETTINGS

Material	<
Speed	<
Travel	∨
Enable Retraction	<input checked="" type="checkbox"/>
Retract at Layer Change	<input type="checkbox"/>
Retraction Distance	1.0 mm
Retraction Speed	45.0 mm/s
Retraction Retract Speed	45.0 mm/s
Retraction Prime Speed	45.0 mm/s
Retraction Extra Prime Amount	0.0 mm ³
Retraction Minimum Travel	1.5 mm

- Set the Retraction Distance to **1.0mm** in your slicer software

Do not use any g-codes that were sliced with a Retraction Distance higher than 1.5mm

INSTALLATION COMPLETE!

SERVICE TIPS

REMOVING FILAMENT

- Preheat the hotend to printing temperature
- Press the extruder arm to release the gear tension
- Push the filament down about 10mm to extrude any melted plastic from the hotend
- Quickly pull the filament out of the extruder

LOADING FILAMENT

- Preheat the hotend to printing temperature
- Cut the tip of the filament at a 45-degree angle
- Straighten the tip of the filament out
- Using the printer menus issue an Extrude command
- Insert the filament into the extruder as the gears are rotating

When loading filament do not press the extruder arm until the filament has made it into the tube below the extruder drive gears

NOZZLE REPLACEMENT PROCEDURE

- Preheat the hotend to exactly 220C
- Remove the filament from the hotend
- Unscrew the old nozzle, while holding the heater block in position using an adjustable wrench
- Screw in the new MK8 nozzle and torque it to 30-inch pounds (3.4Nm) while holding the heater block in position using an adjustable wrench
- Verify that the thermal break is still seated flush on top of the heater block after installation

