



SG FLNG. V6 FILL CPLNG. V4 OUTGAGE & V3 VAPOR CPLNG'S V2 RELIEF CPLNG.

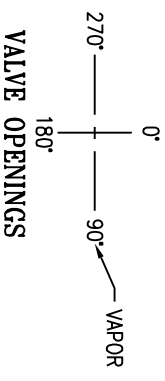

SPECIFICATIONS

O.D. 10	LGTH. 32	SH.	
MAMP 312	PSI @ 650 °F	HD.	
RT-NDMT-20	T @ 312 PSI	GAL. 9.9	S.A. 7.3
EXMT	TEST	WT. 46#	CUFFT. 1.3
XRAY	W	CORR ALW	SH
CRN F2193.1234567890		CODE: ASME SEC. VIII DIV. 1, LATEST EDITION & ADDENDA	HD
WELD DETAILS: M-1932			
STD. TOLERANCES (UNLESS OTHERWISE NOTED): M-2461			



SYMBL	DATE	BY	REVISION	APP	XREF	REV.	NOTES
F		MR					
G		ECB					
H		TA					
J		ECB					

VAPOR APPLIANCE TANK			
Drawn by	DN	DATE	SCALE: NONE
App. by	JD	DATE	DRAWING NO. 6814