



Adjustable thermostat for accurate temperature maintenance

Powerful fan for even circulation of cold air

Metal door frame for durability and reliability (display units only)

Large illuminated display for maximum impact

Self-closing doors minimise temperature loss

Double-glazed (chillers) or triple-glazed (freezers) safety glass doors increase energy efficiency

High-density polyurethane insulation keeps temperature and energy consumption low

Adjustable shelving for flexibility in display configuration (excluding some freezers)

High-impact internal lighting for perfect product presentation

Lockable castors make movement and placement easy

Bromic's Vertical Display & Storage range offers complete versatility, available in one-, two- and three-door configurations across a wide range of temperatures and styles.

13. Upright Display Chillers & Freezers:

Bromic's Upright Display Chillers and Freezers offer reliability in a stylish casing, creating display solutions suited to self-service retail applications.

These dependable units achieve exceptional efficiency while maintaining longevity through simplicity.



This unit's corrosion-resistant outer casing is insulated on all four sides to minimise energy consumption by allowing the refrigeration system to operate efficiently only when it is needed.

19. Fan-Forced Upright Storage Chillers & Freezers:

Bromic's Fan-Forced Upright Storage Chillers and Freezers are designed around the Gastronorm sizing standard, offering rapid cooling, expansive storage and the versatility to be placed practically anywhere thanks to a 38°C maximum ambient temperature rating and lockable castor wheels.

These sturdy yet stylish stainless steel units feature advanced Dixell digital controllers, world-renowned Danfoss compressors and thick polyurethane insulation to offer reliability and efficiency in any application.



17. Wine Chiller:

Bromic's Wine Chiller has been purpose-designed to store up to 50 bottles of wine on its adjustable wooden shelves.

Featuring a wide temperature range (+1°C to +18°C), efficient LED lighting and Dixell digital temperature control, this unit is perfect for preserving red or white wines behind its double-glazed curved glass door.



21. Fan-Forced Upright Display Chillers & Freezers:

Bromic's Fan-Forced Upright Display Chillers and Freezers are packed full of premium perks to ensure perfect performance in high-volume, self-service retail applications.

Defrosting and temperature are automatically regulated by the unit's digital controller while fast fan-forced cooling, heated glass doors and tropical (43°C) /sub-tropical (38°C) ambient ratings combine to keep products primed even in the harshest of Australian conditions.



19. LCD Video Chiller:

Bromic's LCD Video Chiller introduces exciting movement to point-of-sale marketing, demanding the attention of customers by overlaying refrigerated products with relevant advertisements or imaginative entertainment.

This unit's 50-inch LG Ultra High Contrast LCD display resides within a double-glazed door and is able to switch rapidly between transparency and video content without sacrificing quality in bright environments.




19. Upright Storage Chillers & Freezer:

Bromic's Upright Storage Chillers and Freezers prioritise reliability through simplicity to create an affordable storage solution.

23. Specification Reference Guide

Vertical Display & Storage

Upright Display Chillers



GM0220 LED ECO

Flat Glass Door 215L LED Display Chiller

Part No.	Capacity	Weight
3736033	215L	68kg


	External (mm)	Internal (mm)
Height	1400	1025
Width	595	505
Depth	620	462

- High-impact LED lighting maximises product visibility and captures attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Temperature range: +1°C to +10°C



Vertical Display & Storage

Upright Display Chillers




GM0374L LED ECO

Flat Glass Door 372L LED Display Chiller

Part No.	Capacity	Weight
3736036	372L	85kg

	External (mm)	Internal (mm)
Height	2070	1555
Width	595	505
Depth	640	462

- High-impact LED lighting and customizable lightbox capture attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Temperature range: +1°C to +10°C

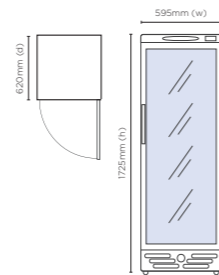


GM0300 LED ECO

Flat Glass Door 290L LED Display Chiller

Part No.	Capacity	Weight
3736034	290L	74kg

	External (mm)	Internal (mm)
Height	1725	1355
Width	595	505
Depth	620	462

- High-impact LED lighting maximises product visibility and captures attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Temperature range: +1°C to +10°C

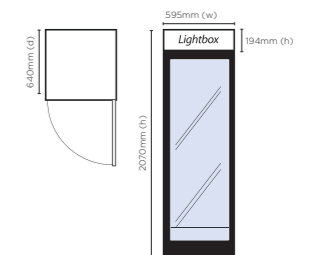


GM0374LB LED

Flat Glass Door 372L LED Display Chiller

Part No.	Capacity	Weight
3736024	372L	85kg

	External (mm)	Internal (mm)
Height	2070	1555
Width	595	505
Depth	640	462

- High-impact LED lighting and customizable lightbox capture attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Temperature range: +1°C to +10°C

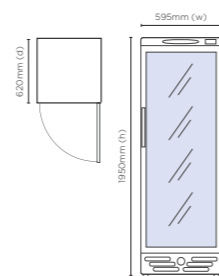


GM0374 LED ECO

Flat Glass Door 372L LED Display Chiller

Part No.	Capacity	Weight
3736035	372L	81kg

	External (mm)	Internal (mm)
Height	1950	1555
Width	595	505
Depth	620	462

- High-impact LED lighting maximises product visibility and captures attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Temperature range: +1°C to +10°C

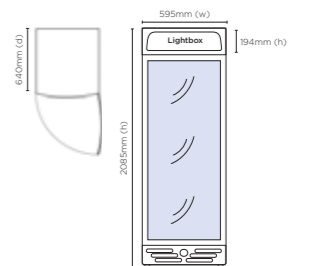

GM0400LC LED

Curved Glass Door 380L LED Display Chiller

Part No.	Capacity	Weight
3736037	380L	90kg


	External (mm)	Internal (mm)
Height	2085	1555
Width	595	505
Depth	640	462

- High-impact LED lighting and customizable lightbox capture attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Temperature range: +1°C to +10°C



Vertical Display & Storage

Upright Display Chillers



GM0440L LED

Flat Glass Door 438L LED Display Chiller

Part No.	Capacity	Weight
3736038	438L	110kg


	External (mm)	Internal (mm)
Height	2125	1515
Width	680	580
Depth	655	495

- High-impact LED lighting and customizable lightbox capture attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Temperature range: +1°C to +10°C



Vertical Display & Storage

Upright Display Chillers

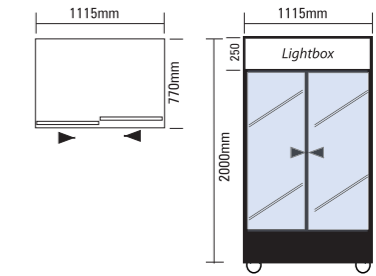


GM0875LS LED

Sliding Glass Door 895L LED Display Chiller

Part No.	Capacity	Weight
3736028	895L	163kg

	External (mm)	Internal (mm)
Height	2000	1305
Width	1115	1000
Depth	770	652

- High-impact LED lighting and customizable lightbox capture attention
- Double-glazed safety glass increases efficiency while reducing condensation
- Self-closing door for hassle-free self service
- Illuminated light box to highlight branding
- Temperature range: +1°C to +10°C

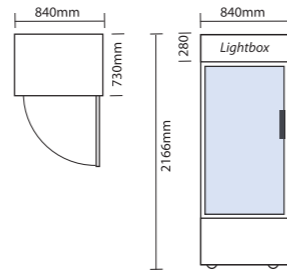


GM0660LW LED ECO

Flat Glass Door 660L LED Display Chiller

Part No.	Capacity	Weight
3736202	660L	124kg

	External (mm)	Internal (mm)
Height	2166	1531
Width	840	740
Depth	730	595

- Double-glazed safety glass door increases efficiency while heated air eliminates glass condensation
- Precise Carel digital temperature control and Embraco compressor
- Door lock to secure stock
- Illuminated light box to highlight branding
- Temperature range: +1°C to +10°C

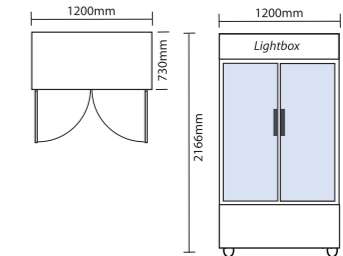


GM1000LW LED

Flat Glass Door 1000L LED Display Chiller

Part No.	Capacity	Weight
3736200	1000L	170kg

	External (mm)	Internal (mm)
Height	2166	1531
Width	1200	1100
Depth	730	595

- Double-glazed safety glass door increases efficiency while heated air eliminates glass condensation
- Precise Carel digital temperature control and Embraco compressor
- Door lock to secure stock
- Illuminated light box to highlight branding
- Temperature range: +1°C to +10°C

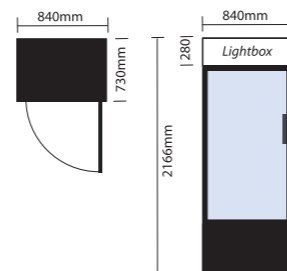


GM0660LB LED ECO

Flat Glass Door 660L LED Display Chiller

Part No.	Capacity	Weight
3736211	660L	124kg

	External (mm)	Internal (mm)
Height	2166	1531
Width	840	740
Depth	730	595

- Double-glazed safety glass door increases efficiency while heated air eliminates glass condensation
- Precise Carel digital temperature control and Embraco compressor
- Door lock to secure stock
- Illuminated light box to highlight branding
- Temperature range: +1°C to +10°C

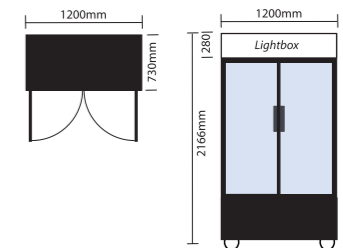

GM1000LB LED

Flat Glass Door 1000L LED Display Chiller

Part No.	Capacity	Weight
3736210	1000L	170kg


	External (mm)	Internal (mm)
Height	2166	1531
Width	1200	1100
Depth	730	595

- Double-glazed safety glass door increases efficiency while heated air eliminates glass condensation
- Precise Carel digital temperature control and Embraco compressor
- Door lock to secure stock
- Illuminated light box to highlight branding
- Temperature range: +1°C to +10°C



Vertical Display & Storage

Upright Display Chillers



GMO300 RETRO

Retro 290L LED Display Chiller

Part No.	Capacity	Weight
3736079	290L	85kg
External (mm)		Internal (mm)
Height	1720	1555
Width	595	505
Depth	610	462

- Front glass panel with green LED surround embedded into door glass
- Completely customisable 1950s-inspired retro unit that allows endless creative freedom*
- Temperature range: +1°C to +10°C


1 YEAR WARRANTY
LABOUR & PARTS

SPECIAL ORDER

*Minimum quantity required

Vertical Display & Storage

Upright Display Freezers

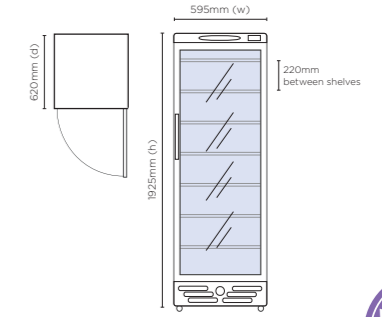


UF0374S LED

Flat Glass Door 300L LED Display Freezer

Part No.	Capacity	Weight
3736045	300L	102kg
External (mm)		Internal (mm)
Height	1925	1550
Width	595	475
Depth	620	440

- High-impact LED lighting maximises product visibility and captures attention
- Self-closing door for hassle-free self service
- Refrigeration integrated into all 6 fixed shelves for even cooling
- Temperature range: -19°C to -14°C

1 YEAR WARRANTY
LABOUR & PARTS




WCO400C LED ECO

Curved Glass Door 372L Wine Chiller

Part No.	Capacity	Weight
3735145	372L	84kg
External (mm)		Internal (mm)
Height	1840	1555
Width	595	505
Depth	640	462

- Reversible doors for complete flexibility
- 5 adjustable wooden shelves hold up to 50 bottles of wine
- Lockable castors make movement and placement easy
- Dixell digital controller for precise temperature maintenance
- Temperature range: +1°C to +18°C

1 YEAR WARRANTY
LABOUR & PARTS

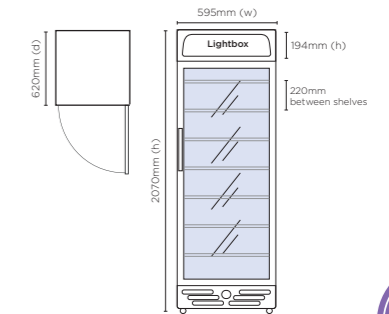


UF0374LS LED

Flat Glass Door 300L LED Display Freezer

Part No.	Capacity	Weight
3736046	300L	106kg
External (mm)		Internal (mm)
Height	2070	1550
Width	595	475
Depth	620	440

- High-impact LED lighting and customizable lightbox capture attention
- Self-closing door for hassle-free self service
- Refrigeration integrated into all 6 fixed shelves for even cooling
- Temperature range: -19°C to -14°C

1 YEAR WARRANTY
LABOUR & PARTS

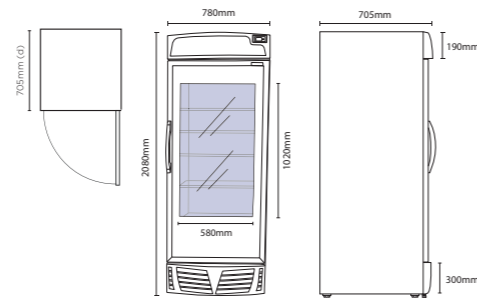

GMO690-VID


LCD Video 657L Display Chiller

Part No.	Capacity	Weight
3736090	657L	136kg
External (mm)		Internal (mm)
Height	2080	1682
Width	780	555
Depth	705	702

- 50-inch LG Ultra-High Contrast LCD display
- 1080 x 1920 screen resolution with a super wide 178° viewing angle
- Self-closing door with stay for easy stocking and hassle-free self service
- Environmentally friendly R600 refrigerant
- Temperature range: +1°C to +10°C

1 YEAR WARRANTY
LABOUR & PARTS

SPECIAL ORDER

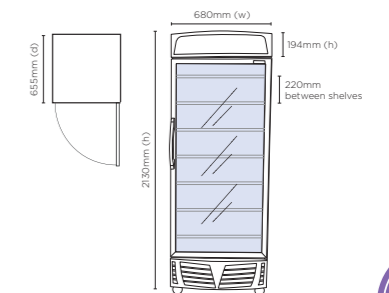

UF0440LS LED

Flat Glass Door 440L LED Display Freezer


Part No.	Capacity	Weight
3736047	440L	123kg
External (mm)		Internal (mm)
Height	2130	1510
Width	680	577
Depth	655	495

- High-impact LED lighting and customizable lightbox capture attention
- Self-closing door for hassle-free self service
- Refrigeration integrated into all 6 fixed shelves for even cooling
- Temperature range: -19°C to -14°C

1 YEAR WARRANTY
LABOUR & PARTS

Vertical Display & Storage

Upright Storage Chillers

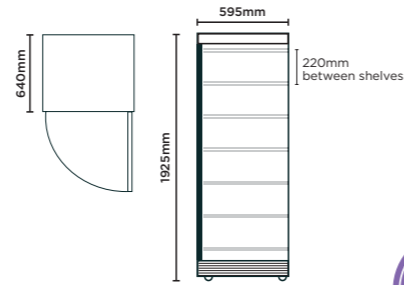

UC0374SDW

Solid Door 372L Storage Chiller


Part No.	Capacity	Weight
3735127	372L	88kg
External (mm)		Internal (mm)
Height	1925	1555
Width	595	505
Depth	640	462

- Solid insulated coated steel door minimises heat ingress
- Reversible doors for complete flexibility
- Flexible storage with 5 adjustable shelves
- Temperature range: +1°C to +10°C



Vertical Display & Storage

Upright Storage Freezers

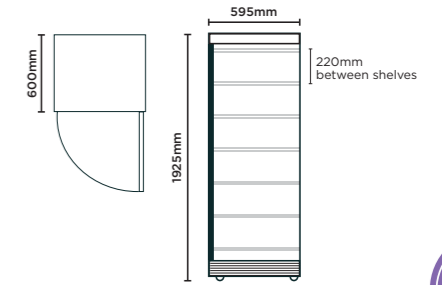


UF0374SDS

Solid Door 300L Freezer

Part No.	Capacity	Weight
3735106	300L	79.5kg
External (mm)		Internal (mm)
Height	1925	1550
Width	595	475
Depth	600	440

- Lockable castors make movement and placement easy
- Solid insulated steel door minimises heat ingress
- Refrigeration integrated into all 6 fixed shelves for even cooling
- Temperature range: -19°C to -14°C




UC0650SD

Gastronorm Stainless Steel 650L Storage Chiller

Part No.	Capacity	Weight
3735161	650L	143kg
External (mm)		Internal (mm)
Height	2010	1390
Width	740	624
Depth	830	685

- Front lockable castors make movement and placement easy
- Self-closing door provides hassle-free operation and energy efficiency
- Supplied with stainless steel rails for use with 1/1 Gastronorm trays
- Dixell digital controller for precise temperature maintenance
- Temperature range: +2°C to +8°C

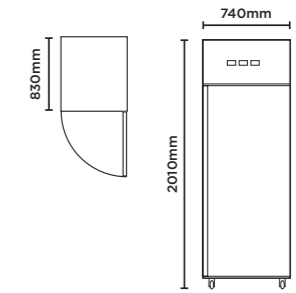


UF0650SDF

Gastronorm Stainless Steel 650L Storage Freezer

Part No.	Capacity	Weight
3735203	650L	147kg
External (mm)		Internal (mm)
Height	2010	1390
Width	740	624
Depth	830	685

- Lockable castors make movement and placement easy
- Self-closing door provides hassle-free operation and energy efficiency
- Supplied with stainless steel rails for use with 1/1 Gastronorm trays
- Dixell digital controller for precise temperature maintenance
- Temperature range: -22°C to -18°C

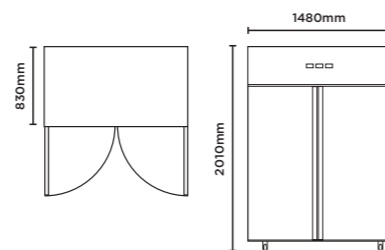


UC1300SD

Gastronorm Stainless Steel 1300L Storage Chiller

Part No.	Capacity	Weight
3735200	1300L	213kg
External (mm)		Internal (mm)
Height	2010	1390
Width	1480	1360
Depth	830	685

- Front lockable castors make movement and placement easy
- Self-closing door provides hassle-free operation and energy efficiency
- Supplied with stainless steel rails for use with 1/1 Gastronorm trays
- Dixell digital controller for precise temperature maintenance
- Temperature range: +2°C to +8°C

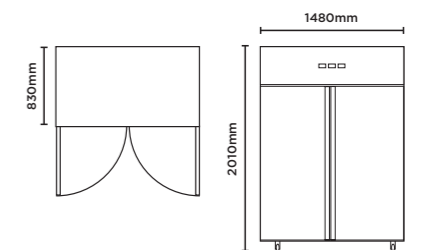

UF1300SDF

Gastronorm Stainless Steel 1300L Storage Freezer


Part No.	Capacity	Weight
3735194	1300L	226kg
External (mm)		Internal (mm)
Height	2010	1390
Width	1480	1360
Depth	830	685

- Lockable castors make movement and placement easy
- Self-closing door provides hassle-free operation and energy efficiency
- Supplied with stainless steel rails for use with 1/1 Gastronorm trays
- Dixell digital controller for precise temperature maintenance
- Temperature range: -22°C to -18°C



Vertical Display & Storage

Fan-Forced Upright Display Chillers

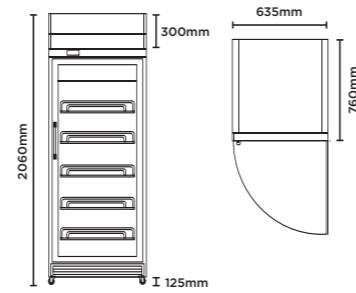

GD0500LF

Flat Glass Door 444L LED Display Chiller

Part No.	Capacity	Weight
3736245	444L	95kg

	External (mm)	Internal (mm)
Height	2060	1435
Width	635	520
Depth	760	595


- Tropical rated to 43°C ambient
- Double-glazed heated safety glass increases efficiency while reducing condensation
- Heated self-closing door with stay for easy stocking and hassle-free self service
- Temperature range: +2°C to +8°C



FF

Vertical Display & Storage

Fan-Forced Upright Display Freezers

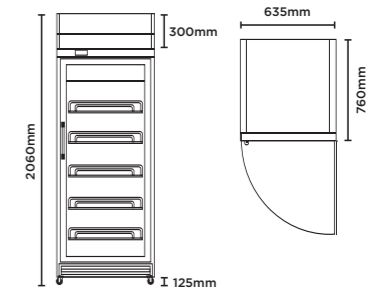

UF0500LF

Flat Glass Door 444L LED Display Freezer


Part No.	Capacity	Weight
3736240	444L	113kg

	External (mm)	Internal (mm)
Height	2060	1420
Width	635	520
Depth	760	550

- Sub-tropical rated to 38°C ambient
- Triple-glazed heated safety glass increases efficiency while reducing condensation
- Heated self-closing door with stay for easy stocking and hassle-free self service
- Temperature range: -22°C to -18°C



FF

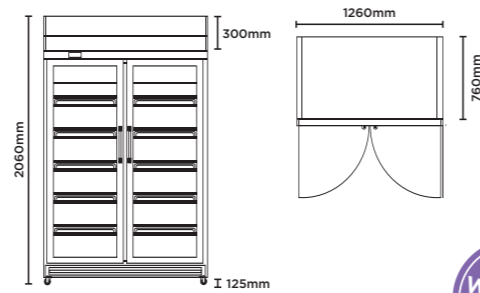

GD1000LF

Flat Glass Door 976L LED Display Chiller


Part No.	Capacity	Weight
3736246	976L	157kg

	External (mm)	Internal (mm)
Height	2060	1435
Width	1260	1143
Depth	760	595

- Tropical rated to 43°C ambient
- Double-glazed heated safety glass increases efficiency while reducing condensation
- Heated self-closing door with stay for easy stocking and hassle-free self service
- Temperature range: +2°C to +8°C



FF

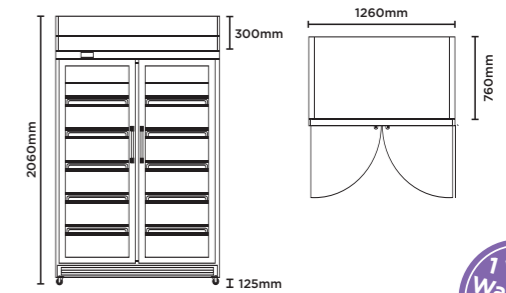

UF1000LF

Flat Glass Door 976L LED Display Freezer


Part No.	Capacity	Weight
3736241	976L	199kg

	External (mm)	Internal (mm)
Height	2060	1420
Width	1260	1143
Depth	760	550

- Sub-tropical rated to 38°C ambient
- Triple-glazed heated safety glass increases efficiency while reducing condensation
- Heated self-closing door with stay for easy stocking and hassle-free self service
- Temperature range: -22°C to -18°C



FF

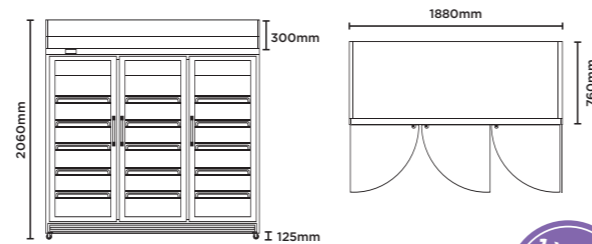

GD1500LF

Flat Glass Door 1507L LED Display Chiller


Part No.	Capacity	Weight
3736247	1507L	209kg

	External (mm)	Internal (mm)
Height	2060	1435
Width	1880	1755
Depth	760	595

- Tropical rated to 43°C ambient
- Double-glazed heated safety glass increases efficiency while reducing condensation
- Heated self-closing door with stay for easy stocking and hassle-free self service
- Temperature range: +2°C to +8°C



FF

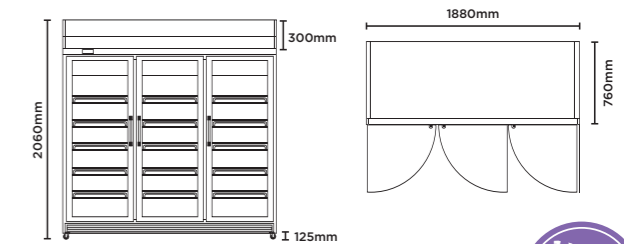

UF1500LF

Flat Glass Door 1507L LED Display Freezer

Part No.	Capacity	Weight
3736242	1507L	279kg

	External (mm)	Internal (mm)
Height	2060	1420
Width	1880	1755
Depth	760	550

- Sub-tropical rated to 38°C ambient
- Triple-glazed heated safety glass increases efficiency while reducing condensation
- Heated self-closing door with stay for easy stocking and hassle-free self service
- Temperature range: -22°C to -18°C



FF

Vertical Display & Storage

Specification Reference Guide

Model	GM0220 LED	GM0300 LED	GM0374 LED	GM0374L LED	GM0374LB LED	GM0400LC LED	GM0440L LED
Part Number	3736033	3736034	3736035	3736036	3736024	3736037	3736038
Ext. Height (mm)*	1400	1725	1950	2070	2070	2085	2125
Ext. Width (mm)*	595	595	595	595	595	595	680
Ext. Depth (mm)*	620	620	620	640	640	640	655
Capacity	215L	290L	372L	372L	372L	380L	438L
Temp. Range	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C
Max. Ambient Temp.	40°C	40°C	40°C	40°C	40°C	40°C	40°C
Refrigeration Power	235W	290W	350W	370W	370W	370W	390W
Current	2.0A	2.0A	2.6A	2.7A	2.7A	2.7A	3.3A
Gross Weight	68kg	74kg	81kg	85kg	85kg	90kg	110kg
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Plug Supplied	1	1	1	1	1	1	1
Power Supply	10A	10A	10A	10A	10A	10A	10A
Features							
Chiller Case	✓	✓	✓	✓	✓	✓	✓
Freezer Case							
Tropical Rated (43°C)							
Display Light Box				✓	✓	✓	✓
Main Light	LED	LED	LED	LED	LED	LED	LED
Door Shape	Flat	Flat	Flat	Flat	Flat	Curved	Flat
Safety Glass	✓	✓	✓	✓	✓	✓	✓
Door Lock							
No. of Doors	1	1	1	1	1	1	1
Self-Closing Door	✓	✓	✓	✓	✓	✓	✓
Temp. Controller	Analogue	Analogue	Analogue	Analogue	Analogue	Analogue	Analogue
Castors	✓	✓	✓	✓	✓	✓	✓
No. of Shelves Incl. Base Per Door	3	4	5	5	5	5	5
Colour	Silver	Silver	Silver	Silver	Black/White	Silver	Silver
Warranty							
Parts (Years)	1	1	1	1	1	1	1
Labour (Years)	1	1	1	1	1	1	1

Vertical Display & Storage

Specification Reference Guide

GM0660LW LED	GM0660LB LED	GM0875LS LED	GM1000LW LED	GM1000LB LED	SPECIAL ORDER GM0300 RETRO	WCO400C LED	SPECIAL ORDER GM0690-VID
3736202	3736211	3736028	3736200	3736210	3736079	3735145	3736090
2166	2166	2000	2166	2166	1720	1840	2080
840	840	1115	1200	1200	595	595	780
730	730	770	730	730	610	610	705
660L	660L	895L	1000L	1000L	290L	372L	657L
+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +18°C	+1 to +10°C
40°C	40°C	40°C	40°C	40°C	40°C	40°C	32°C
300W	300W	850W	600W	600W	290W	270W	485W
2.2A	2.2A	5.6A	4.2A	4.2A	2.0A	1.8A	3.8A
124kg	124kg	163kg	170kg	170kg	85kg	84kg	136kg
R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a
1	1	1	1	1	1	1	1
10A	10A	10A	10A	10A	10A	10A	10A
Features							
✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓			✓
LED	LED	LED	LED	LED	LED	LED	LED
Flat	Flat	Flat	Flat	Flat	Flat	Curved	TV
✓	✓	✓	✓	✓	✓	✓	✓
✓	✓		✓	✓			
1	1	2	2	2	1	1	1
		✓			✓	✓	✓
Digital	Digital	Digital	Digital	Digital	Analogue	Digital	Digital
✓	✓		✓	✓	✓	✓	✓
5	5	5	5	5	4		5
White	Black	Black/White	White	Black	Black	Silver	Silver
Warranty							
1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1

*Depth dimensions exclude lightbox & handle protrusions

*Depth dimensions exclude lightbox & handle protrusions

Vertical Display & Storage

Specification Reference Guide

Model	UF0374S LED	UF0374LS LED	UF0440LS LED	UC0374SDW	UC0650SD	UC1300SD	UF0374SDS
Part Number	3736045	3736046	3736047	3735127	3735161	3735200	3735106
Ext. Height (mm)*	1925	2070	2130	1925	2010	2010	1925
Ext. Width (mm)*	595	595	680	595	740	1480	595
Ext. Depth (mm)*	620	620	655	640	830	830	600
Capacity	300L	300L	440L	372L	650L	1300L	300L
Temp. Range	-19 to -14°C	-19 to -14°C	-19 to -14°C	+1 to +10°C	+2 to +8°C	+2 to +8°C	-19 to -14°C
Max. Ambient Temp.	35°C	35°C	35°C	40°C	38°C /40°C	38°C /40°C	35°C
Refrigeration Power	620W	635W	867W	350W	360W	695W	270W
Curren	3.9A	4.1A	5.6A	2.6A	2.2A	3.8A	2.4A
Gross Weight	102kg	106kg	123kg	88kg	143kg	213kg	79.5kg
Refrigerant	R404a	R404a	R404a	R134a	R134a	R134a	R404a
Plug Supplied	1	1	1	1	1	1	1
Power Supply	10A	10A	10A	10A	10A	10A	10A
Features							
Chiller Case				✓	✓	✓	
Freezer Case	✓	✓	✓				✓
Tropical Rated (43°C)							
Display Light Box		✓	✓				
Main Light	LED	LED	LED	Fluorescent	LED	LED	Fluorescent
Door Shape	Flat	Flat	Flat	Flat	Flat	Flat	Flat
Safety Glass	✓	✓	✓				
Door Lock							
No. of Doors	1	1	1	1	1	2	1
Self-Closing Door	✓	✓	✓	✓			✓
Temp. Controller	Analogue	Analogue	Analogue	Analogue	Digital	Digital	Analogue
Castors	✓	✓	✓	✓	✓	✓	✓
No. of Shelves Incl. Base Per Door	6	6	6	6	6	6	6
Colour	Silver	Silver	Silver	Black/White	Stainless Steel	Stainless Steel	Black/White
Warranty							
Parts (Years)	1	1	1	1	1	1	1
Labour (Years)	1	1	1	1	1	1	1

Vertical Display & Storage

Specification Reference Guide

UF0650SDF	UF1300SDF	GD0500LF	GD1000LF	GD1500LF	UF0500LF	UF1000LF	UF1500LF
3735203	3735194	3736245	3736246	3736247	3736240	3736241	3736242
2010	2010	2060	2060	2060	2060	2060	2060
740	1480	635	1260	1880	635	1260	1880
830	830	760	760	760	760	760	760
650L	1300L	444L	976L	1507L	444L	976L	1507L
-22 to -18°C	-22 to -18°C	+2 to +8°C	+2 to +8°C	+2 to +8°C	-22 to -18°C	-22 to -18°C	-22 to -18°C
38°C	38°C	43°C	43°C	43°C	38°C	38°C	38°C
590W	940W	740W	1000W	1132W	1000W	1600W	2000W
2.8A	4.8A	4.5A	5.6A	7.0A	4.7A	8A	15A
147kg	226kg	95kg	157kg	209kg	113kg	199kg	279kg
R404a	R404a	R134a	R134a	R134a	R404a	R404a	R404a
1	1	1	1	1	1	1	1
10A	10A	10A	10A	10A	10A	10A	15A
Features							
		✓	✓	✓			
✓	✓				✓	✓	✓
		✓	✓	✓			
		✓	✓	✓	✓	✓	✓
LED	LED	LED	LED	LED	LED	LED	LED
Flat	Flat	Flat	Flat	Flat	Flat	Flat	Flat
✓	✓	✓	✓	✓	✓	✓	✓
		✓	✓	✓	✓	✓	✓
1	2	1	2	3	1	2	3
		✓	✓	✓	✓	✓	✓
Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital
✓	✓	✓	✓	✓	✓	✓	✓
6	6	6	6	6	6	6	6
Stainless Steel	Stainless Steel	White with S/Steel Trim	White with S/Steel Trim	White with S/Steel Trim	White with S/Steel Trim	White with S/Steel Trim	White with S/Steel Trim
Warranty							
1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1

*Depth dimensions exclude lightbox & handle protrusions

*Depth dimensions exclude lightbox & handle protrusions