## Open House 2334







## **Upholstery Specifications**



Style	OPEN HOUSE 2334	
Contents	100% recycled polyester	
Weight	12.4 ± 1.0 oz. / lin. yd.	
Width	54° min.	
Repeat	none	
Backing	none	
Treatment	none	
Cleaning Code	W	
	Clean with water-based cleaning agents, foam or pure, water-free solvents.  Vacuuming or light brushing is recommended to prevent dust and soil buildup.	

Performances	
Breaking strength (ASTM D5034)	275 lbs. min. warp and fill
Tear (ASTM D2261)	35 lbs. min. warp and fill
Seam Slippage (ASTM D4034)	50 lbs. min. warp and fill
Pilling resistance (ASTM D3511)	class 4 min.
Colorfastness to light (AATCC 16 Option 3)	40 hrs. min.
Colorfastness to crocking (AATCC 8)	class 4 min. dry class 3 min. wet
Colorfastness to water (AATCC 107)	class 3 min. for staining class 4 min. for color change
Abrasion resistance (ASTM D4157)	250,000 double rubs - cotton duck
Flammability	
State of CA. Tech. Bulletin, 117 SEC. E	passes
UFAC / NFPA 260	class 1

Colors may vary slightly between dye lots. These are directional fabrics. Application testing of these products is recommended.



Terratex® is a registered trademark of True Textiles, Inc. and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing negatives to produce a high quality product that is proviable at the end of its useful life. www.terratev.com.



CO, emissions from 100% of the electricity used by the manufacturer to produce this product have been measured and offset in accordance with The CarbonNeutral Protocol.


**BLOCK** aide <sup>nu</sup> BLOCKaide is a durable water and oil resistant treatment formulated for commercial interior fabrics. Liquid spills will bead up on the surface of the fabric so that they can be removed before they stain the fibers.


For full fabric selections visit ergoCentric.com To request samples call 1 866 GET ERGO




## AIR KNIT



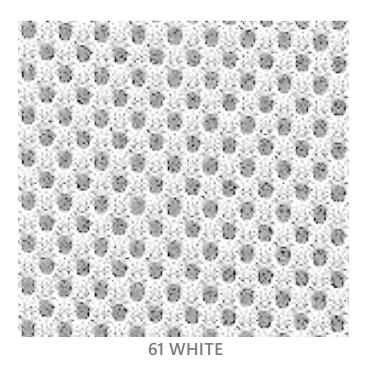



**308 NAVY** 







9009 BLACK

## AIR KNIT



For full fabric selections visit ergoCentric.com

To request samples please email info@ergocentric.com or call us at 1 866 GET ERGO (438-3746)

SPECIFICATIONS	
Contents	100% Polyester
A Abrasion	Exceeds 200,000 Double Rubs: Contract Rated
W UV/lightfastness	AATCC 16: Classe 4.5
Fire retardancy*	CAL117 Section-E, NFPA 260 Class 1, UFAC Class 1
Weight	8.89 oz./yd²
Width	60" (152 cm)
Roll size	50 yd (45.7m)
Cleaning instructions	MWTD – Machine Wash and Tumble Dry with Care MSW – Clean with mild soap and water
Cautions	Do not Bleach. Do not Iron.

<sup>\*</sup> This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions. This information is offered for your general guidance only. It's accurate to the best of our knowledge and is not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information and to comply with all laws and procedures applicable to the safe handling and use of this material. Final determination of the suitability of any product for an application rests with the user.