


32" Ultrathin Digital Display Non-Touch Standee



Technical specification

| | |
|-----------------------|----------------------------|
| Model | TPC32AV |
| MiniPC | Android / Windows optional |
| Touch | Non Touch |
| Panel size | 32" (81.28 cm) |
| Maximum resolution | 1920 x 1080 |
| Aspect Ratio | 16:9 |
| Brightness (nits) | 400cd/m2 |
| Contrast | 900 : 1 |
| View angle | 178°/178°(H/V) |
| Display color | 16.7M |
| Response time | 8ms |
| Operation Duration | 7x24 |
| Life Time(hrs) | ≥ 6,0000hrs |
| HDMI Input | 1 |
| USB 2.0 | 2 |
| VGA | 0 |
| Speaker | 2 x 10W (80hm) |
| Power supply | 100-240VAC, 50/60HZ |
| Power consumption | ≤230W |
| Working temperature | 0°C~50°C |
| Storage temperature | -10°C~60°C |
| Storage humidity | 5%-95% |
| Cabinet color | Black / Apple-Like |
| Screen Protection | Armored Glass |
| Dimension (W x D x H) | 457 x 25 x 1700 mm |
| Warranty | 1 Year Carry in Warranty |

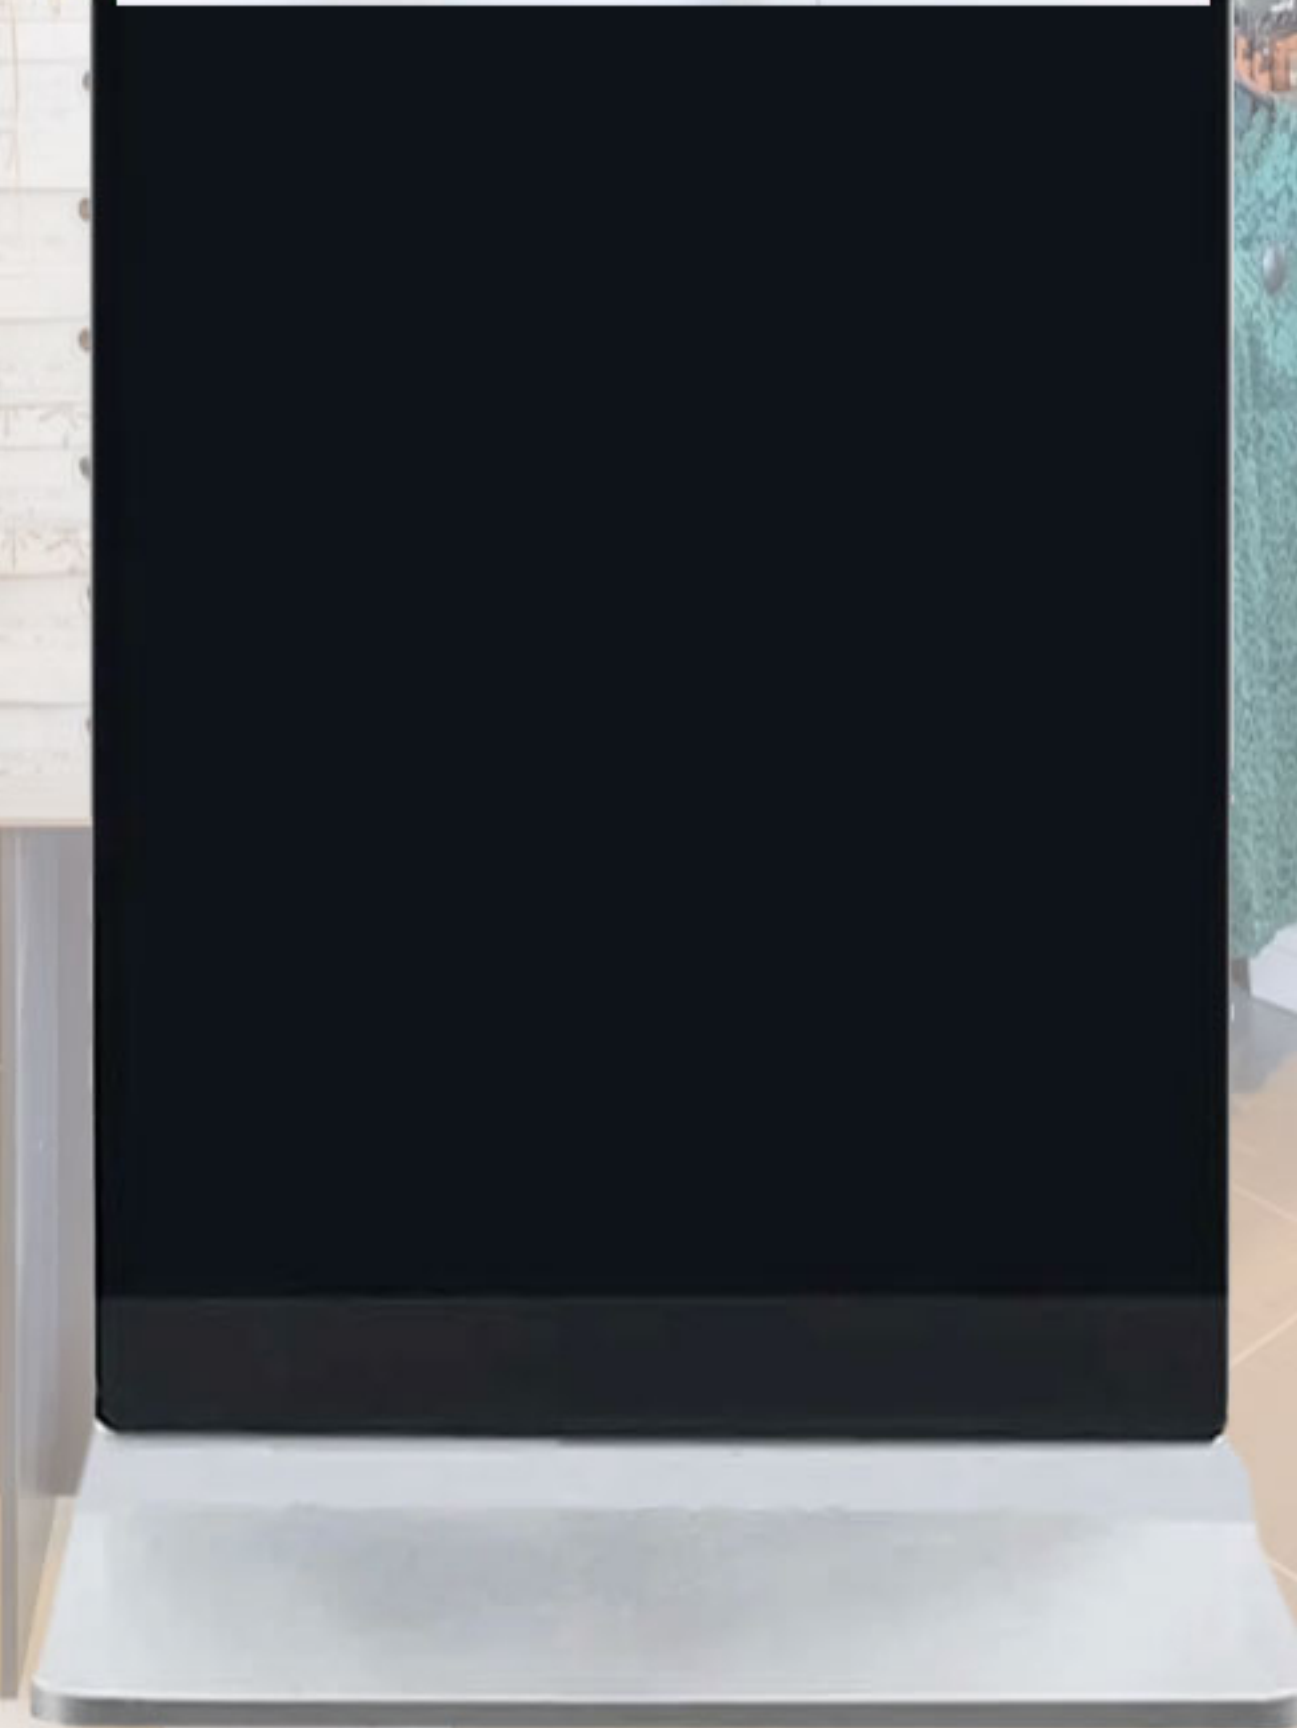

DIMENSION

