CAUTION

Compress the rear suspension of the motorcycle with the saddlebags loaded, to be sure the saddlebags do not come in contact with the swing arm, rear brake caliper, brake rotor (or drum brake linkage or mechanisms), drive chain and sprocket (or drive shaft system) and NEVER come in contact with the exhaust system or disturb the normal flow of exhaust gasses from the muffler(s); leave at least 6" clearance! Adjust the mounting system accordingly.

WARNING

BEFORE each ride, check ALL mounting harnesses and retainer straps to be sure they are secure and correctly positioned.

ADDITIONAL PRECAUTIONS

- Before riding WITHOUT saddlebags installed, REMOVE the retainer straps from the passenger footpegs and rear turn signal stalks and store them with the saddlebags until needed when you reinstall the saddlebags.
- Refer to your motorcycle's OWNERS MANUAL for proper suspension settings, tire pressures and payload limits with accessories installed.
- These saddlebags are NOT WATERPROOF. If you must ride in rainy weather, it is recommended you take additional precautions such as packing the saddlebag contents in "plastic trash bags" before putting them in your saddlebags.

CARE & CLEANING

Use a vacuum cleaner, sponge or cloth and clean water. DO NOT use detergents or harsh chemicals.

PLEASE NOTE:

We cannot assume liability for wear on bodywork and finish, so please use COMMON SENSE and determine for yourself if the bodywork on YOUR motorcycle is prone to damage from typical luggage mounting. IF THIS IS THE CASE, USA EXTRA PADDING TO PREVENT SUCH DAMAGE. CHASE HARPER USA has protective clear vinyl material available directly from CHASE HARPER USA.

MADE IN USA BY





3007 Bunsen Ave Unit F, Ventura, CA 93003 · (805) 477-9993 · FAX (805) 477-9987 www.chaseharperusa.com



3850 / DUAL PURPOSE SADDLEBAGS

INSTALLATION INSTRUCTIONS

PLEASE READ and UNDERSTAND the instructions completely before installation to avoid any possible injury to yourself or damage to the accessory or the motorcycle.

DEALER: These instructions contain important information for future reference and MUST be given to the customer.


SADDLEBAG SET COMPONENTS

Saddlebag, Left (1) (with internal stiffener panels)
Saddlebag, Right (1) (with internal stiffener panels)

Retainer Straps (4)

. INSTALLATION

- a) Temporarily attach the left & right saddlebags together with the integral wide mounting harness.
- b) Place saddlebag set over the passenger portion of the motorcycle seat.
- c) Readjust the mounting harness straps, if necessary, positioning the saddlebags as high as possible.
- d) Refer to the illustration and attach the retainer straps to the rear turn signal stalks and the passenger footpegs (inboard of their folding hinge pin)

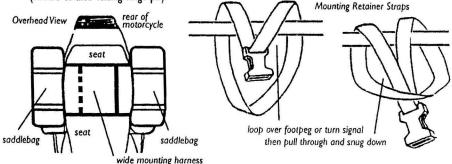

- e) Attach the female buckles of the retainer straps to their mating male buckles on the front and rear saddlebag straps.
- f) Adjust the front and rear saddlebag straps to hold the saddlebags snugly in place to the side of the motorcycle.

2. SADDLEBAG LOADING CONSIDERATIONS

- a) NEVER OVERLOAD the saddlebags. The saddlebag LOAD LIMIT is 10 lbs. MAXIMUM PER SADDLEBAG.
- b) DO NOT carry sharp, pointed or heavy objects in the saddlebags.
- c) Distribute the load evenly between the saddlebags, packing the heaviest items in the bottom of the saddlebags.
- d) NEVER ride with only one saddlebag (sounds stupid, but some people actually try this).
- e) After packing your saddlebags, adjust the vertical load distribution strap of each saddlebag until it is taughtly tensioned.

(OVER)