


WARNING

Because our magnetic mount tankbags incorporate extremely strong magnets in their mounting system, you are strongly advised NOT to place credit cards, bank cards, video or audio cassettes, computer discs or drives, or any other items that may be damaged by magnetism in tankbags using this mounting system.

Models 750M, 800M, 1650M & 1700M

The Magnetic Mounting System is quick and convenient. It is secured to the tank by a combination of magnets and a tethering strap looped around the steering head and frame.

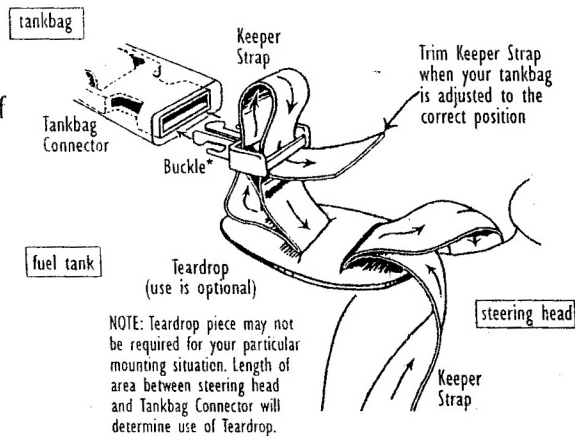

*actual buckle may differ slightly from buckle pictured in illustration

MAGNETIC TANKBAG MOUNTING INSTRUCTIONS

1. Slip loose end of keeper strap through tear drop (IF NEEDED) and slide tear drop up to buckle.
2. Run loose end of keeper strap down and around the frame tubes directly below the steering head, being careful not to interfere with any wires, cables or the steering of the motorcycle.
3. Attach buckle to strap as shown in fig. 1
4. Lay the tankbag in basic position on top of the motorcycle tank.
5. Attach the tankbag connector to the buckle on the keeper strap. Adjust the keeper strap and trim off the excess strap length (leaving about 6" to allow for easy removal and remounting). With a hot knife or soldering iron (NOT NEAR FUEL TANK), sear cut end to prevent unraveling.
6. Go for a ride and have as much fun as possible.

CLEANING;

Open all zippers, remove all inserts and hardware. Hand wash using cold or warm water and a mild detergent. Hang dry.




3007 Bunsen Ave Unit F, Ventura, CA 93003 · (805) 477-9993 FAX (805) 477-9987
www.chaseharperusa.com

WARNING

Because our magnetic mount tankbags incorporate extremely strong magnets in their mounting system, you are strongly advised NOT to place credit cards, bank cards, video or audio cassettes, computer discs or drives, or any other items that may be damaged by magnetism in tankbags using this mounting system.

Models 750M, 800M, 1650M & 1700M

The Magnetic Mounting System is quick and convenient. It is secured to the tank by a combination of magnets and a tethering strap looped around the steering head and frame.

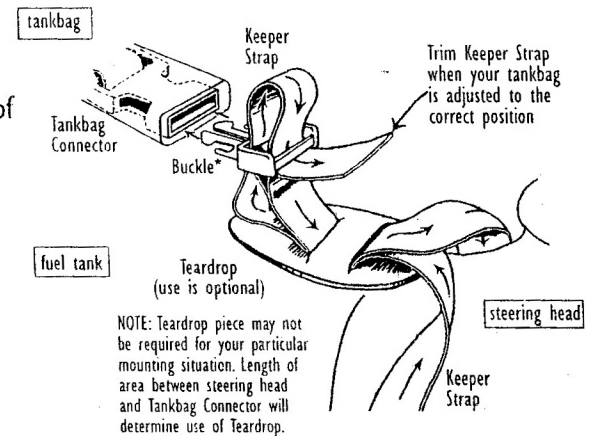

*actual buckle may differ slightly from buckle pictured in illustration

MAGNETIC TANKBAG MOUNTING INSTRUCTIONS

1. Slip loose end of keeper strap through tear drop (IF NEEDED) and slide tear drop up to buckle.
2. Run loose end of keeper strap down and around the frame tubes directly below the steering head, being careful not to interfere with any wires, cables or the steering of the motorcycle.
3. Attach buckle to strap as shown in fig. 1
4. Lay the tankbag in basic position on top of the motorcycle tank.
5. Attach the tankbag connector to the buckle on the keeper strap. Adjust the keeper strap and trim off the excess strap length (leaving about 6" to allow for easy removal and remounting). With a hot knife or soldering iron (NOT NEAR FUEL TANK), sear cut end to prevent unraveling.
6. Go for a ride and have as much fun as possible.

CLEANING;

Open all zippers, remove all inserts and hardware. Hand wash using cold or warm water and a mild detergent. Hang dry.



3007 Bunsen Ave Unit F, Ventura, CA 93003 · (805) 477-9993 FAX (805) 477-9987
www.chaseharperusa.com