


# 4200 TAIL TRUNK BAG MOUNTING INSTRUCTIONS



- Unzip hideaway zipper compartment located on the underside of the bag to access bungee cords
- Place tail trunk onto motorcycle pillion, rack, or rear cowl
- Pull and hook bungee cords to secure anchor points such as the passenger foot pegs and/or frame. Additional secure webbing loops sewn to bottom corners of the bag can also be used as anchor points after looping the bungee cords around the frame or rack

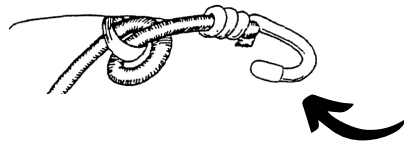


\*Helpful hint: If the bungee cords become worn or frayed, a new set of bungee cords can be installed by looping them through the additional secure webbing loops twice and then pulled tight for a secure fitment

## CLEANING AND MAINTENANCE

Chase Harper USA luggage is constructed from high quality industrial grade ballistic nylon that is treated to repel water, dirt and stains, which makes cleaning easy. Clean with mild soap and light-pressure water using a nylon-bristled brush or microfiber cloth. For best results, clean the entire bag, not just the soiled area. Stubborn stains may be treated with Simple Green®, Fantastik®, Woolite®, 409®, or similar cleaning product. Foaming upholstery cleaners made for wool-nylon blend fabrics also work well. After your fabric has been cleaned, spray with Scotchgard® to maintain water, dirt and stain resistance properties.

\*Note: When using any commercial cleaning product, follow the manufacturer's directions carefully.

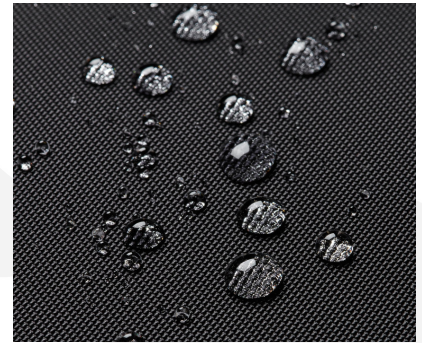

## WARRANTY INFORMATION

For peace of mind we offer a lifetime warranty on all of our products. If you need to claim against the warranty, please contact us and we'll guide you through the process. Be advised sun damage is not covered under the warranty.

When sending an item in for repair, please wash the bag prior to shipping. If the item arrives dirty, a \$20 cleaning fee may be applied to the repair. Also, be sure to include a note with the item that states the damage description along with your contact information including phone number, email, and return shipping address so we can send updates on your repair.

