



How to Install Double Sided Snaps Using a Table Press

By: kimmysnabric.com

Materials Needed:

- ♥ KAM Table Press
- ♥ Size 20 Snap Socket Dies
- ♥ Double Sided Snap Base
- ♥ Leather Hole Punch
- ♥ Size 20 socket snaps
- ♥ Double Sided Snaps
- ♥ The item you are putting a snap on.



Dies

Top piece for
Socket




Base piece for
Double Sided
Snap





Set up your table press:

- ♥ The Double Sided Snap Die Base inserts into the bottom hole.
- ♥ Attach the socket die by twisting it into the upper hole (for a DK93 press).



Socket Die



Punch holes where you wish the prong (sharp point) of the snap to be inserted.



Prong

Tools to make Hole



Crop-a-dile: this tool has hole punch in 2 sizes and attaches eyelets

Awl: Sharp and creates a small hole

Leather Hole Punch: can create 6 different sized holes



Applying the Double Sided Snap

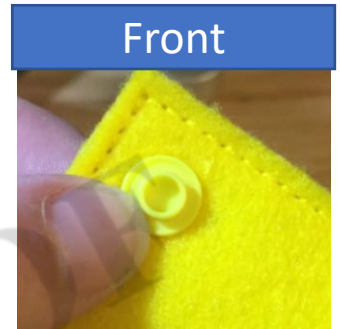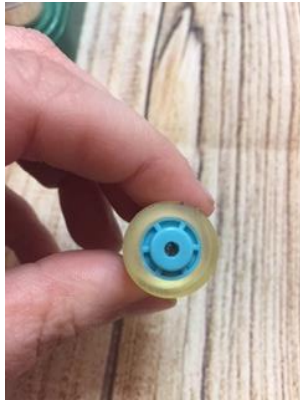

Press the socket into the die, it should press into the die and be flat feeling.
Twist the die into the top of the table press.



Insert the cap into the hole you made in the project you are adding the snap to.

The prong should stick out the back of your project.




Remove from press.

Insert the stud with prong (double sided snap) and material into the press, make sure the stud sits evenly in the grooves of the press base die.

Press down on the handle the upper die should squash down on the material. You should see a slight bulge in the rubber of the die.

Make it Snap!


Front of Project

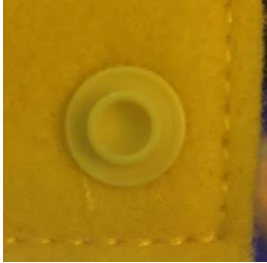

Back of Project



Notice the centers of the socket is equally pressed down. This means you have done well!

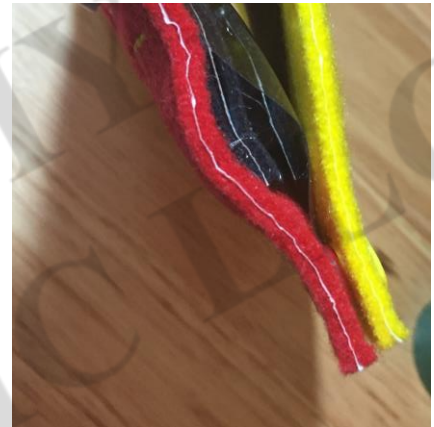

See the Quiet book tutorial for more details on using these Double Sided Snaps!

Kimmy Snabric, LLC

P.O. Box 738

Fate, TX 75132

Pick-up Location: Greenville, TX

www.KimmySnabric.com



We love to see your projects!
Follow us on Facebook
(www.facebook.com/groups/kimmysnabric)