


Installation Instructions for LED Stingray 4 & Stingray 6

1. Turn off power source at breaker.
2. Remove access panel from fixture – slide out.
3. Plug your power source into the yellow quick disconnect wire harness – White to white, black to black – this is the “hot” side of the fixture. Make sure wires are secure by pulling them. Extra white & black spaces used for daisy chaining (advanced).
4. Ground your power source green wire to the green ground screw.
5. Re-install access panel with wires & quick disconnect inside the fixture housing.
6. Some fixtures have a blue protective film over the mirrored reflector – remove if included.
7. Remove pin covers from LED tubes (look like a white “+” symbol).
8. Install tubes with markings “N/L or AC”, the side with the tube specs written side towards your power source (black cord not included – used to depict power source). Most tubes are powered on one end only, so this is very important.
9. Quarter turn the tube so the LED light source is facing the ground once mounted.
10. For surface mount, remove the two screws, open reflector like door, and choose any holes.
11. For chain mount, use “S” hooks and Jack chain on the punch out holes. (not provided)

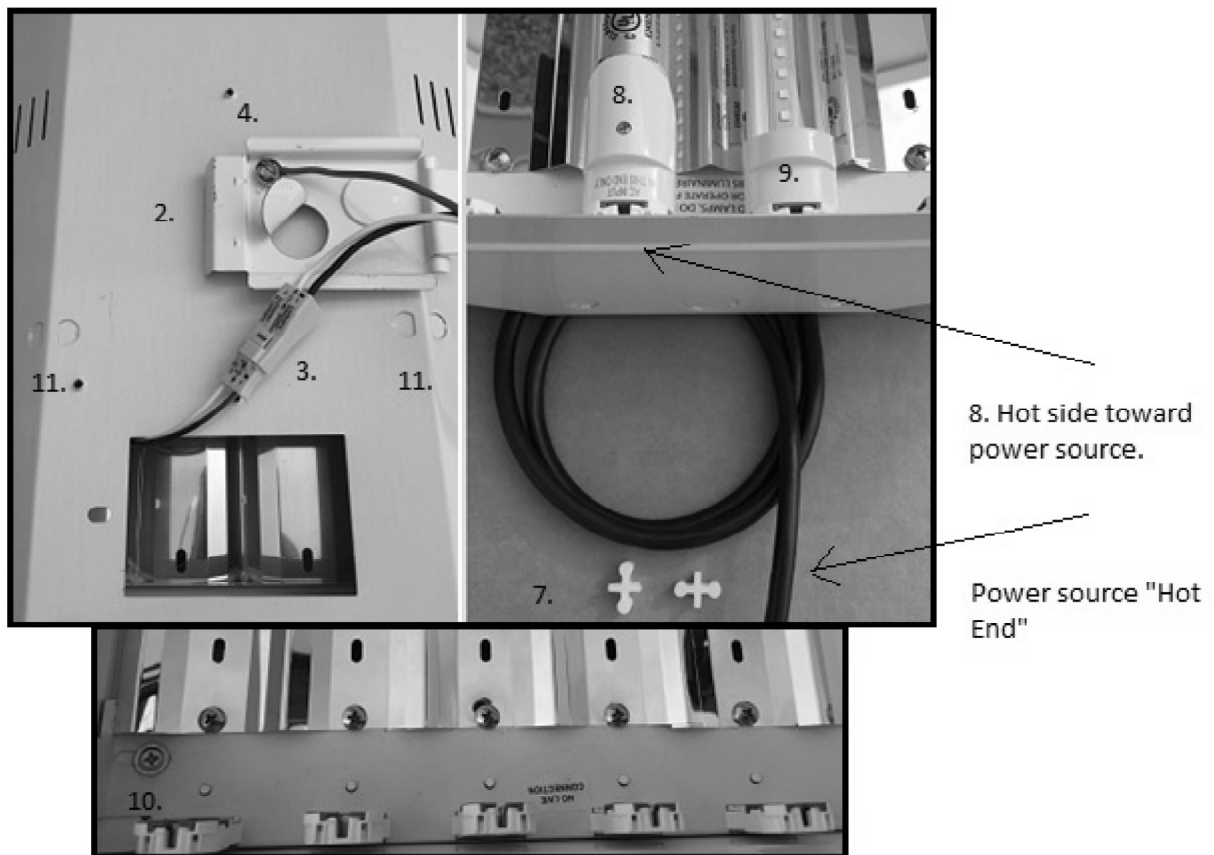

**Never install fluorescent lamps. *Risk of fire. Risk of electric shock. Installation of luminaires requires knowledge of electrical systems. It is always recommended that a licensed electrician installs these light fixtures. * If the lamp or luminaire exhibits undesirable operation (buzzing, flicking, etc.), immediately turn off power and contact manufacturer.*