

Valor[®] LT2 2700K


February 2024
1/2

Framing Dimensions

1/2" [13 mm] thick non-combustible board required above, on each side and below engine opening (NOT supplied)

Note: Height of cavity may be affected by vent configuration, see Installation Manual for details.

NOTE: This unit requires a solid platform to support it. Combustible framing allowed beneath fireplace. When the appliance is installed directly on carpeting, tile or other combustible material other than wood flooring, the appliance shall be installed on a metal or wood panel extending the full width and recessed depth of the appliance

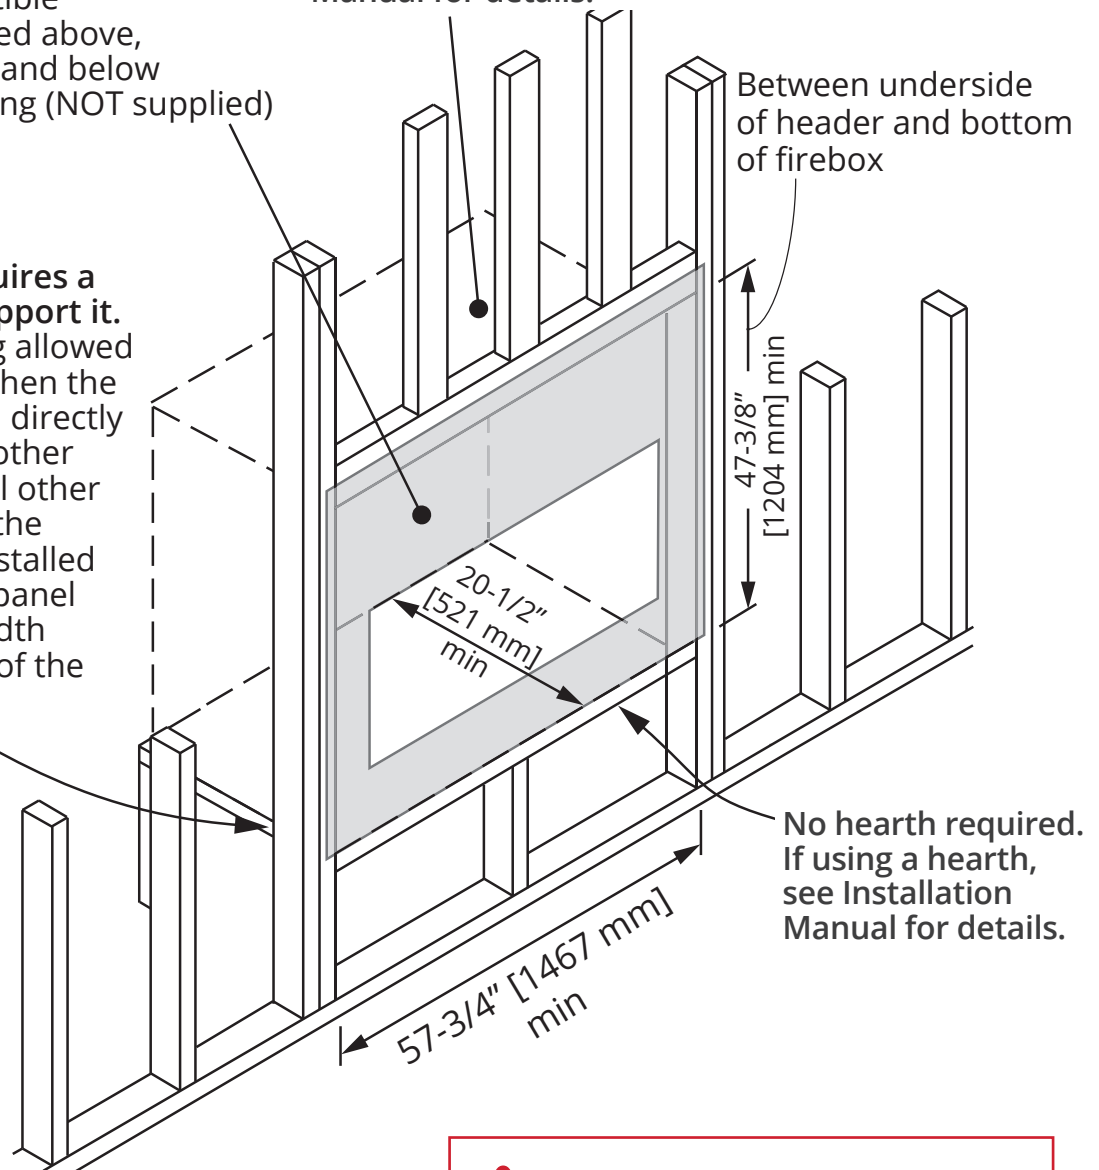

Between underside of header and bottom of firebox

47-3/8"
[1204 mm] min

20-1/2"
[521 mm] min

57-3/4" [1467 mm] min

No hearth required. If using a hearth, see Installation Manual for details.

⚠ WARNING

HeatShift System MUST be installed on this appliance! See Installation Manual for HeatShift framing details.

Valor[®] LT2 2700K

February 2024
2/2

Framing—Partial shelf, top outlet

