



Nectre N65 Wood Stove

Elegant, powerful heating with high efficiency and low emissions



Specifications



67%
EFFICIENCY



1.98g
EMISSIONS



68,500 BTU
(19.8kW)
PEAK OUTPUT



**UP-TO
10hr**
BURN TIME



12.6"
(320mm)
MAX LOG



**UP-TO
2,150 sq. ft.**
(up to 200m²)
COVERAGE



1/4"
(6mm)
CONSTRUCTION



1.67 cu. ft.
(.047m³)
FIREBOX SIZE

- Certified for EPA 2020 New Source Performance Standards
- Finished in black metallic paint
- Steel door with ceramic glass
- 6" stove pipe diameter
- Steel baffle with steel brick retainer and firebrick lining to improve thermal mass
- Rear clearance 10" (25.4 cm)
- Approved hardwood storage box

■ Emissions quoted are grams per kilogram. Construction of the Nectre N65 is mild steel. Warranty* provided is on the firebox only. Efficiency percentages quoted are peak. Burn time quoted is up to. BTU/Kilowatt output quoted is peak.

* Burn times may vary, to achieve best burn rate times please visit www.nectreusa.com






N65 Wood Stove


Radiant / Convection
Wood Stove



Clearances to Combustible Material

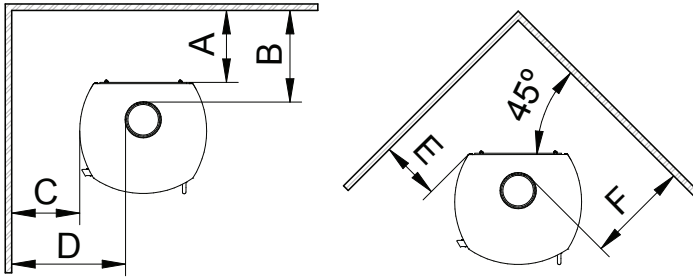


Back Wall Exit Configuration

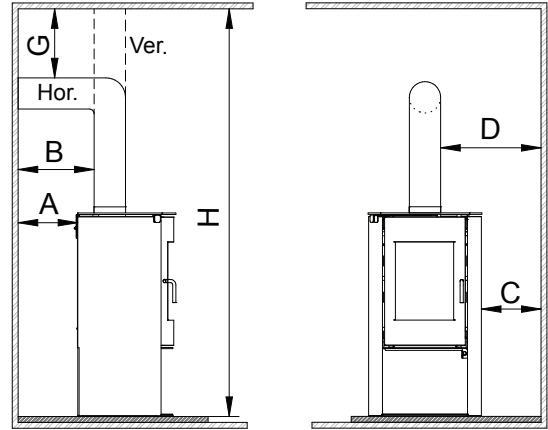

Minimum Clearance	Single Wall Connector	Double Wall Connector
A Back wall to stove rear	13" (33.0 cm)	10" (25.4 cm)
B Back Wall to connector pipe	16,5" (41.9 cm)	13" (33.0 cm)
C Side wall to stove side	12" (30.5 cm)	12" (30.5 cm)
D Side Wall to connector pipe	20,5" (52.1 cm)	20" (50.8 cm)
E Corner wall to stove corner	10,5" (26.7 cm)	6" (15.3 cm)
F Corner wall to connector pipe	18,5" (47.0 cm)	13,5" (34.3 cm)
Minimum ceiling to top of appliance	42" (106.7 cm)	


Minimum Clearance	Single Wall Connector	Double Wall Connector
A Back wall to stove rear	17" (43.2 cm)	10" (25.4 cm)
B Back Wall to connector pipe	20,5" (52.1 cm)	13" (33.0 cm)
C Side wall to stove side	12" (30.5 cm)	12" (30.5 cm)
D Side Wall to connector pipe	20,5" (52.1 cm)	20" (50.8 cm)
G Ceiling to horizontal connector pipe	18" (45.7 cm)	16" (40.7 cm)
H Ceiling to floor	82" (208.3 cm)	82" (208.3 cm)

Floor Protector (Hearth)

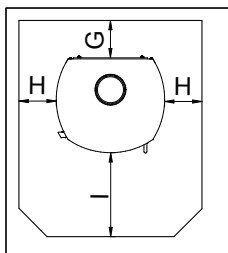

	Floor Protector	
	US	Canada
G	N/A	8" (20.3 cm)
H	5" (12.7 cm)	8" (20.3 cm)
I	16" (40.6 cm)	18" (45.7 cm)

* For rear horizontal vents extend protection under and 2" either side of vent

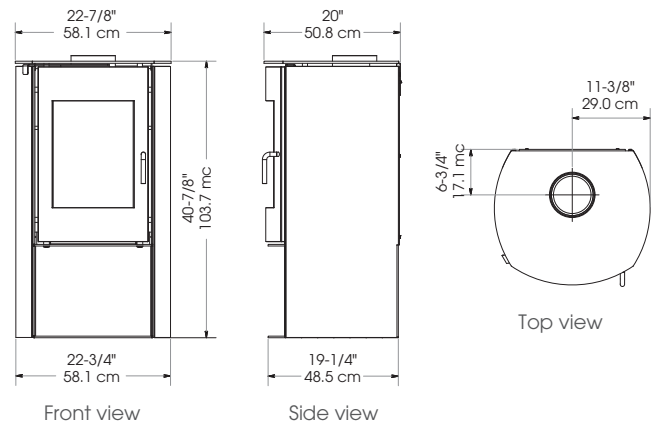

Model #	N65
Description	Wood stove

Heat Output	68,500 BTU's/hr
Recommended Heating Area	Up to 200m ² (2,150 sq. ft.)

Carton Dimensions (WxHxD)	28-1/8" x 48-5/8" x 25-3/8"
	71.5 cm x 123.5 cm x 64.5 cm

Weight	419 lbs (190.0 KG)
Warranty ¹	10-year limited