



## CONTENTS

Fixtures (x3)




Canopy Assembly (x1)

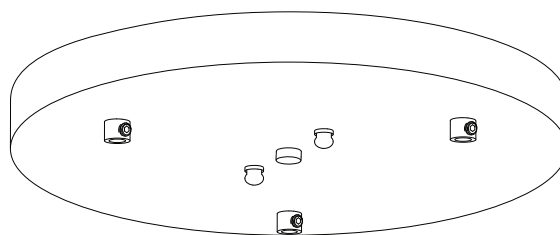

#8-32 Screws (x2)



3mm Allen Wrench (x1)



## SAFETY INFORMATION

Please contact a licensed electrician for installation.

Suitable for dry, indoor use.

Do not use bulbs that exceed 100 watts (E-26 Medium Base Socket).

## CEILING INSTALLATION

- 1] Unscrew the Mounting Caps (F) to detach the Mounting Plate (A) from the back of the Canopy Assembly.
- 2] Secure the Mounting Plate (A) onto the junction box using the provided #8-32 Screws (C).
- 3] Run the fixture Cords (G) up through the Canopy (D) and tighten the Hex-Head Set Screws (E) using the provided Allen Wrench to create the desired hanging lengths.
- 4] Make the wire connections between fixtures and from the junction box wires to the Fixtures while carefully holding the chandelier. Attach the green ground wires to the Mounting Plate (A) with the provided green ground screw.
- 5] Raise the Canopy (D) until the Threaded Posts (B) come through the holes in the Canopy. Press the Canopy flush to the ceiling and secure in place with the Mounting Caps (F).
- 6] Screw bulbs into Fixture sockets.

