



## CONTENTS

Fixture (x1)




Canopy Assembly (x1)

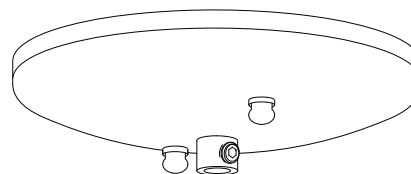

#8-32 Screws (x2)



3mm Allen Wrench (x1)



## SAFETY INFORMATION

Please contact a licensed electrician for installation.

Suitable for dry, indoor use.

Do not use bulbs that exceed 100 watts (E-26 Medium Base Socket).

## CEILING INSTALLATION

1] Unscrew the Mounting Caps (F) to detach the Mounting Plate (A) from the back of the Canopy Assembly.

2] Secure the Mounting Plate (A) onto the junction box using the provided #8-32 Screws (C).

3] Run the Fixture Cord (G) up through the Canopy (D) and tighten the Hex-Head Set Screw (E) using the provided Allen Wrench to create the desired hanging length.

4] Make the wire connections from the junction box wires to the Fixture while carefully holding the Fixture. Attach the green ground wires to the Mounting Plate (A) with the provided green ground screw.

5] Tuck the connected wires into the junction box. Raise the Canopy (D) until the Threaded Posts (B) come through the holes in the Canopy. Press the Canopy flush to the ceiling and secure in place with the Mounting Caps (F).

6] Screw bulb into Fixture socket.

