


Xplorer 3500 Series Closure Instructions

1. The contents of the Xplorer 3500 package are shown below.



2. Gauge in Safe position and Locked.

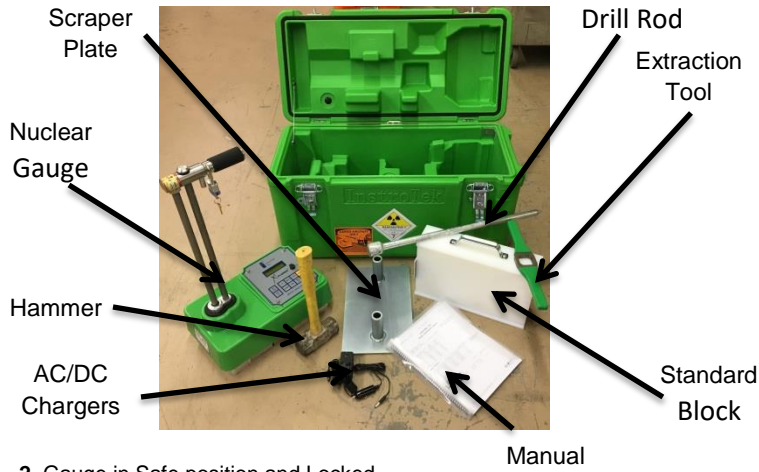


The gauge is part of the Type A Package. The Cs137 is permanently affixed inside the source rod and the Am241:Be is permanently affixed to inside the gauge. The Cs137 source rod locked in Safe position is the start of the packing system.

3. Placing the contents: The interior of the box has pre-formed sections for the placement of the standard block, the gauge, and the gauge accessories.



3. Close the lid and fasten the latches. A picture of the latch mechanism is shown below; note the four parts: the catch, the latch bar, and catch eye, and the latch hasp.

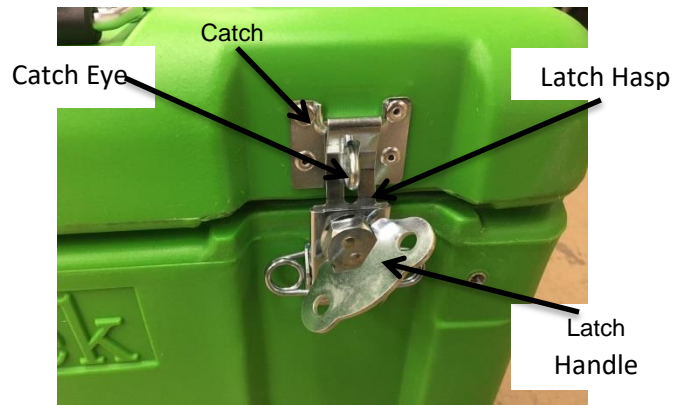

5. Place the latch bar into the catch as shown above. Make sure the latch hasp is securely in the catch.

6. Rotate the latch handle clockwise to secure the latch hasp to the catch—ensure the catch eye protrudes through the latch hasp—as shown.



7. Secure the wire tie or lock as shown below. **You must make sure that the wire tie is of sufficient size that it will not slip through the slot in the latch hasp allowing the case to be opened.**

