


MC Series Closure Instructions

1. The contents of the MC Series package are shown below.



2.

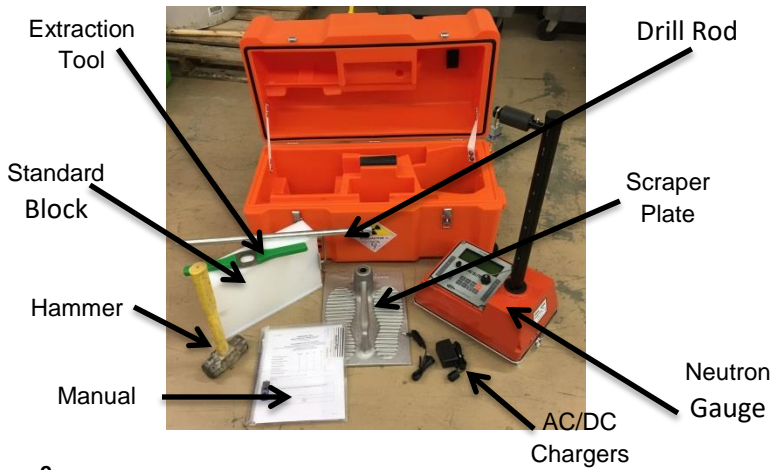

The gauge is part of the Type A Package. The Cs137 is permanently affixed inside the source rod and the Am241:Be is permanently affixed to inside the gauge. The Cs137 source rod locked in Safe position is the start of the packing system.

3. **Placing the contents**


The interior of the box has pre-formed sections for the placement of the standard block, the gauge, and the gauge accessories.



4. **Close the lid.**

5. **Fastening of the latches**

A picture of the latch mechanism is shown below, note the three parts, the catch, the latch bar, and latch eye, and the latch hasp.

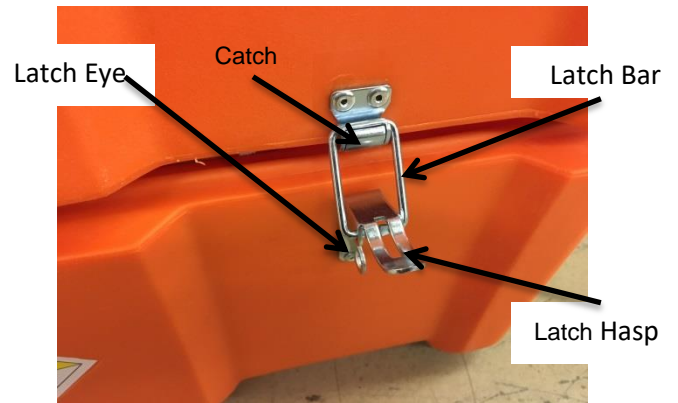

6. Place the latch bar into the catch as shown below. Make sure the latch bar is securely in the catch.



7. Push firmly down on the latch hasp until the latch eye is completely through the latch hasp.

8. Secure the wire tie or lock as shown below. **You must make sure that the wire tie is of sufficient size that it will not slip through the slot in the latch hasp allowing the case to be opened.**

