


# SEI RADIATION ALERT **Inspector usb Xtreme** Handheld Radiation Alert® Detector



Now with USB and the free Observer USB Software, you can download your data from the internal memory, set computer alarms, and calibrate your instrument! The Inspector Xtreme USB offers maximum performance in a lightweight, rugged solution for using your survey meter in the field. The Inspector Xtreme USB is designed specifically for individuals operating in tough environments, such as 1st Responders, miners, and HAZMAT crews. The unit is a small, handheld, microprocessor-based instrument which offers excellent sensitivity to low levels of alpha, beta, gamma, and x-rays. The digital readout is displayed with a red count light and a beeper sounds with each count detected. Other features include an adjustable timer, external calibration controls, and selectable alert.

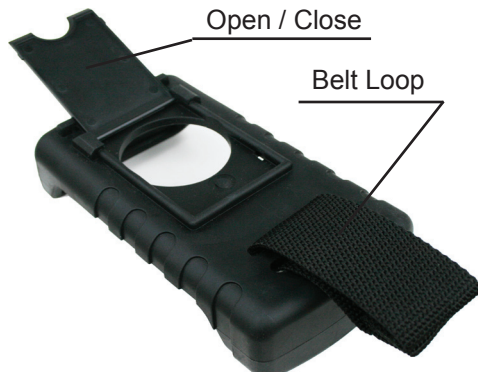

## Detector

Internal Halogen-quenched, uncompensated GM tube with thin mica window, 1.4-2.0 mg/cm<sup>2</sup> areal density. Effective diameter of window is 45 mm (1.77 in.). Radiation symbol on front label marks the center of the detector.

## Averaging Periods

Display will update every 3 seconds. At low background levels, the update is the moving average for the past 30-second time period. The timed period for the moving average decreases as the radiation level increases.

## Operating Range

mR/hr - .001 (1 $\mu$ R) to 100 CPM - 0 to 350,000  
 $\mu$ Sv/hr - .01 to 1000 CPS - 0 to 5000  
Total/ Timer - 1 to 9,999,000 counts

## Accuracy (Cs<sup>137</sup>)

mR/hr  $\pm$ 10% typical (NIST),  $\pm$ 15% max - 0 to 100  
 $\mu$ Sv/hr  $\pm$ 10% typical (NIST),  $\pm$ 15% max - 01 - 1000  
CPM  $\pm$ 10% typical (NIST),  $\pm$ 15% max - 0 to 350,000  
(Referenced to Cs-137)

## Energy Sensitivity

Detects Alpha down to 2 MeV. Detects Beta down to .16 MeV; typical detection efficiency at 1 MeV is approx. 25%. Detects Gamma down to 10 KeV through the end window. 3340 CPM/mR/hr (Cs<sup>137</sup>). Smallest detectable level for I<sup>125</sup> is .02  $\mu$ Ci at contact.

## Built-In Efficiencies

<sup>5</sup>Sulfur (S35), <sup>90</sup>Strontium (Sr/y90), <sup>137</sup>Cesium (Cs137),  
<sup>32</sup>Phosphorus (P32), <sup>14</sup>Carbon (C14), <sup>131</sup>Iodine (I131),  
<sup>60</sup>Cobalt (Co60), and Alpha

## Alert Set Range

mR/hr .001 - 50 and CPM 1 - 160,000. 70db @ 1m.

# SEI INTERNATIONAL INC



P.O. Box 39, 436 Farm Rd. Summertown, TN 38483

1-800-293-5759

Fax: 931-964-3564

www.seintl.com

radiationinfo@seintl.com

# RADIATION<sup>®</sup> A • L • E • R • T

# SEI RADIATION ALERT Inspector usb Xtreme

## Handheld Radiation Alert® Detector

### Display

Backlit 4 digit liquid crystal display with indicators.

### Count Light

Red LED flashes with each radiation event.

### Audio Indicator

Internally mounted beeper  
(can be switched off for silent operation)

### Outputs

Dual miniature jack drives CMOS or TTL devices and counts to computer or datalogger.

USB for use with Observer USB Software for PCs

### Anti-Saturation

Meter will hold at full scale in fields as high as 100 times the maximum reading.

### Power Requirements

One 9-volt alkaline battery. Battery life is approx. 2160 hours at normal background.

### Temperature Range

-10° to 50°C (14° to 122°F)

### Weight

Inspector: 275 grams (9.7 oz.) without battery.

### Size

178 x 95 x 41 mm (7 x 3.8 x 1.6 in.)

### Includes



Carrying Case, Certification of Conformance, Observer USB Software

### Options


Wipe Test Plate & Stand

### Limited Warranty

1 year limited, 90 day limited warranty on GM Tube

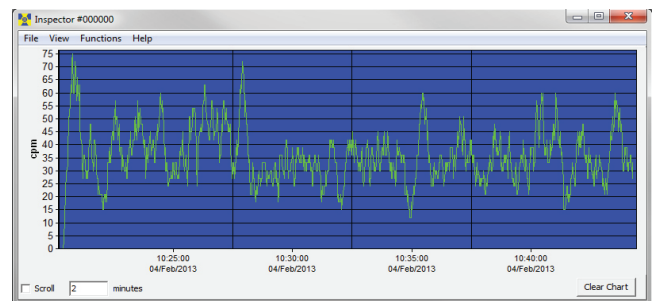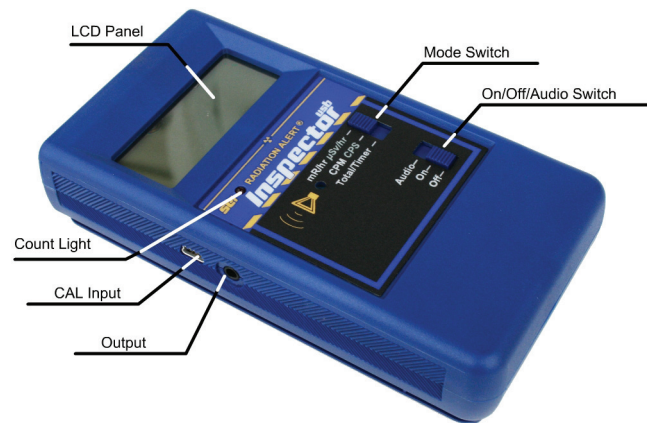

USB Observer Software collects data stored in the internal memory of The InspectorUSB

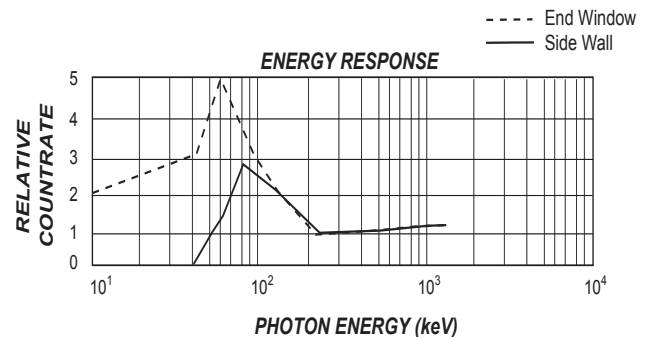

The Xtreme Boot can be easily removed to use The Inspector with the Wipe Test Plate



The Xtreme Boot provides easy access to the buttons.

# SEI INTERNATIONAL INC



P.O. Box 39, 436 Farm Rd. Summertown, TN 38483

1-800-293-5759

Fax: 931-964-3564

www.seintl.com

radiationinfo@seintl.com

# RADIATION<sup>®</sup> A • L • E • R • T