



HANDHELD, VAPOR AND PARTICULATE EXPLOSIVES DETECTION

FLIR FIDO® X3

The FLIR Fido X3 is the lightest and most sensitive handheld explosives trace detector in its class. Its unique TrueTrace™ detection technology identifies military, conventional, homemade, and liquid explosive threats by class on surfaces (particulate) and in bottles (vapor). With a magnesium case and splash-proof seal, its rugged design meets rigorous MIL-STD-810G and IP54 specifications. It starts from cold in five minutes and has a battery that lasts up to eight hours. With clear-down measured in seconds, operators spend more time sampling and less time waiting. Fido X3 expedites on-site decision making with ten-second threat reporting via intuitive, go/no-go alarms. Training can be completed in 30 minutes, further minimizing the impact on day-to-day operations and costs. With thousands of units fielded in over 40 countries, the Fido X-series is the most trusted handheld explosives trace detector for critical security applications.

www.flir.com/FidoX3



BEST-IN-CLASS SPEED AND SENSITIVITY

Detects a broad range of explosives at trace levels that are invisible to the operator

- FLIR TrueTrace, multi-channel fluorescence technology; no radioactive source
- Detect military, conventional, homemade, and liquid explosives
- Detects extremely low levels of explosives on surfaces (particulate) and in bottles (vapor) within ten seconds



BUILT TO SURVIVE HARSH ENVIRONMENTS

Adaptable for many mission types

- Lightweight and ergonomic
- IP54 rated for dust ingress and water resistance
- MIL-STD-810G compliant for shock, vibration, temperature, and humidity; 1m drop-tested
- Long-lasting, user replaceable battery



SIMPLE TO OPERATE, INTUITIVE USER INTERFACE

Fast go/no-go results

- Five minute start-up time, results in ten seconds, and clear-down within seconds
- Visible, audible, and haptic alerts; sunlight-readable display
- Broad, class-based identification
- On-device video training

SPECIFICATIONS

Fido X3

Technology	FLIR TrueTrace™; multi-channel fluorescence technology; no radio-active source
------------	--

Sampling & Analysis

Sample Introduction	Direct vapor for bottled liquids or sampling swipes for surfaces
Sample Phase	Vapor and trace particulate
Threats	Detects military, conventional, homemade, and liquid explosives
Sampling & Analysis	Analysis ≤10 seconds with real-time detection capability

System Interface

Display & Alerts	Visible, audible, and haptic (vibration) alerts; vivid, sunlight-readable color display (32k colors)
Localization	Language translation available worldwide
Communication	USB; optional embedded wireless; Windows®-based software
Data Storage	3,500 hrs of continuous data logging
Data Management	On-device report generation; export to mass storage
User Levels	Operator and Administrator

Power

Input Voltage	100-240 VAC (wall adapter supplied)
Battery Specs	Two rechargeable Li-ion batteries (swappable and up to 8-hr battery life); adapter
Startup Time	<5 minutes from cold; <10 seconds from sleep


Environmental

Operating Temperature	14 to 122 °F (-10 to 50 °C)
Operating Humidity	5% to 95% non-condensing
Storage Temperature	-4 to 122 °F (-20 to 50 °C)

Physical Features

Dimensions (L x W x H)	14.5 x 4.5 x 2.8 in (37.0 x 11.5 x 7.0 cm) - with battery
Weight	3.0 lbs (1.4 kg)
Enclosure & Protection	Molded magnesium and polymer composite casing with anti-corrosive coating
Standards	ASTM™ E2520

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.flir.com

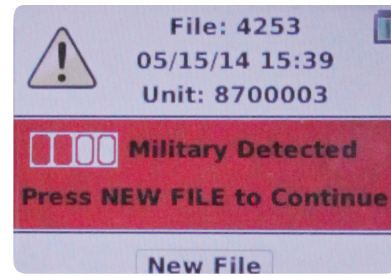

HEADQUARTERS
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA

DETECTION SALES, AMERICAS
FLIR Systems, Inc.
1201 S. Joyce Street
Suite C006
Arlington, VA 22202
USA
PH: +1-877-692-2120

DETECTION SALES, APAC
FLIR Detection, Inc.
10 Kallang Avenue #09-10
Aperia Tower 2
Singapore 335910
PH: +65-6822-1596

DETECTION SALES, EMEA
FLIR Detection, Inc.
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5106

detection@flir.com
www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. Revised 05/19/20
20-0749-DET-DET-X3-DATASHEET UPDATE LTR

Distributed by
www.GoThermal.co.za

TeleEye (South Africa) / GoThermal
Unit 4,
4 Homestead Ave.
Bryanston
Johannesburg
South Africa

Tel: (+27) 11 557 9200
e-mail: Sales@GoThermal.co.za



The World's Sixth Sense®

