

VIPIR Navy Special Warfare Gen3 Legacy Signal Light



PRODUCT NUMBER 02608-0

BATTERY DURATION*

Duration **Function**

20+ Hours Steady-On

48 BPM Flash 40+ Hours

*For indication purposes only. Duration may vary with temperature.

TAN MODEL




TECHNICAL SPECIFICATIONS

BATTERY SOURCE OPTIONAL BATTERY HOUSING MATERIAL **HOUSING FINISH** DOME LENS **OPERATING TEMPERATURE** STORAGE TEMPERATURE **ENVIRONMENTAL SEAL** WATERPROOF RATING VISIBILITY RANGE **SWITCH RING ROTATION**

One (1) Lithium 3Vdc (Type: 123A) HOUSING COLORS AVAILABLE Black or Tan (add -TAN to Product #) High-Tech Polymer Matte High Impact Polycarbonate, Clear -20 to +65°C -40 to +80°C Fully Encapsulated Unit 330Ft (100 Meters) 20 Miles (32km) IR, on a clear dark night Clockwise & Counterclockwise

LIGHT FUNCTIONS

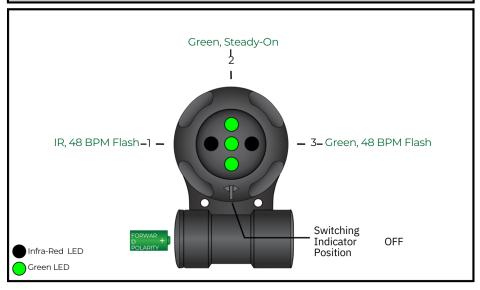



Specifications subject to change without prior notice

P-PS-02608-0r1 May 2013



Accessories for VIP [™] To Complete your System



Universal Mount 99001P/N: Multi-purpose mounting unit. Can pivot VIP 180 degrees in ten 18 degree steps.



Light Pouch
99002 (Pain):
(add -1 for Green; -2 for Black)
MOLLE compatible. Designed for
VIP. Available in three colors.



99008/N: Triggers VIP light when magnetic plug is pulled off of cap.

Trip Wire / Trigger Cap



99010 (LofgN: (add -1 for Short)
Allows only directional viewing of VIP light. Long (18°) or Short (30°).



99011 P/N:
Makes VIP light signature larger by providing an even glow for viewing from the side.



Window Mount
990 (clear lens)
(add -IRBK for IR black lens)
Attaches VIP to glass surface.
Available with clear lens or IR
specific black lens.



P/N: 99030-DL (add -TAN for Tan)
Allows attachment to reclosable fastener such as hook and loop. Comes with all necessary hardware and patches.

Helmet Mount



99/08:3 (add -TAN for Tan)
Adapts VIP battery source to two lithium or alkaline AA batteries, increasing overall run time.



P/N:

99034

Powers VIP on rechargeable battery source. Included cylindrical cell can connect to any standard USB port.