



ADVANCED PHOTONICS
TACTICAL THERMAL
WEAPON SIGHTS


TI-GEAR-S625

The TI-GEAR-S625 is the professional-grade thermal weapon sight for aiming and engagement on a wide variety of firearms at short- to and medium-range distances. Ideal for both small, large-size caliber rifles, machine guns, whether single or repetitive shooting. It is also a great tool for reconnaissance and tactical surveillance.

The latest generation silent and Auto-NUC sensor is at the base of the TI-GEAR-S625. GSCI proprietary hardware and software solutions are built around the sensor and offer exceptional image quality along with unique tools for added tactical advantage and user safety.

The TI-GEAR-S625 is fully dust- and waterproof, meets and exceeds modern standards. The TI-GEAR-S625 is designed for both professional users and also firearms enthusiasts. It is a robust, reliable tool for long-term, intensive use in any environment, in any lighting or weather conditions.

ADVANTAGES OF TI-GEAR-S625

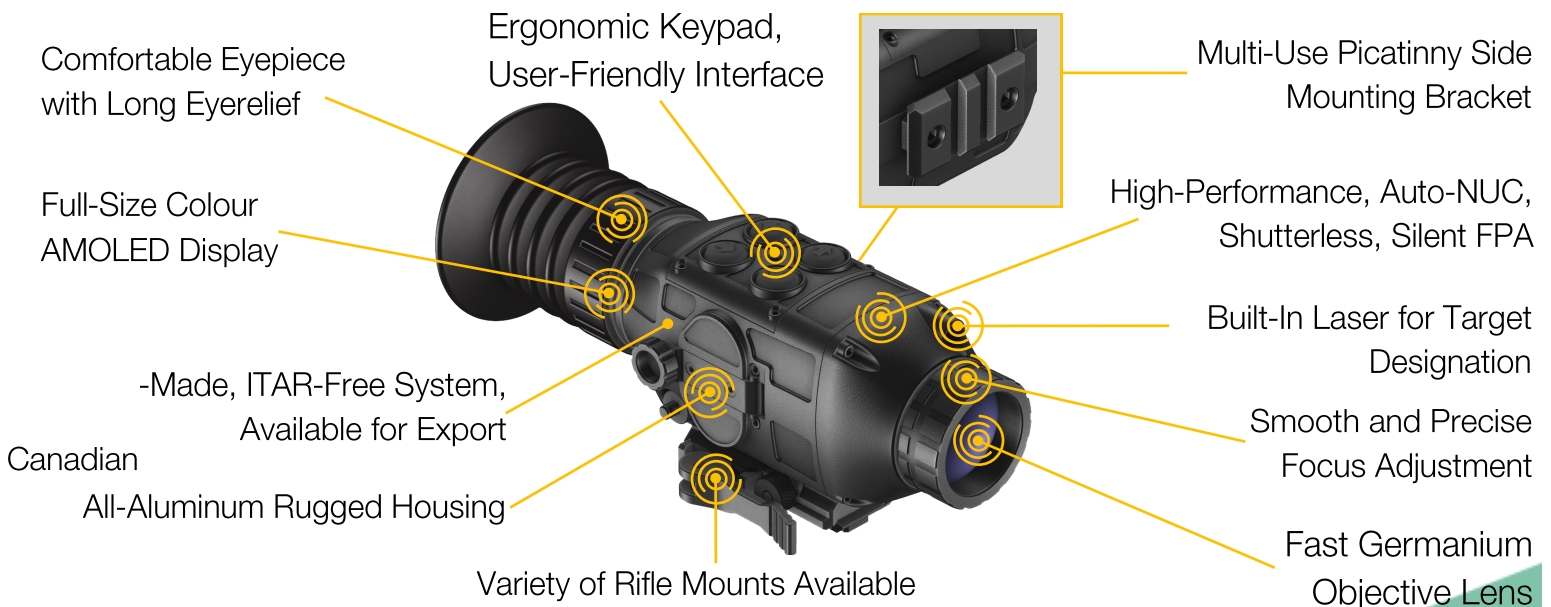

Designed, Developed, Manufactured by GENERAL STARLIGHT COMPANY INC.
120 WHITMORE ROAD, UNIT 20, WOODBRIDGE, ONTARIO, L4L6A5, CANADA
WWW.GSCI1.COM | GSCI@GSCI1.COM | +1.905.850.0990



DISCLAIMER. Technical description, certain optical-electronic-mechanical features of the product shown herein and/or some of its parts/components may not precisely represent the actual device and are subject to change without prior notice by the sole discretion of General Starlight Company, Inc. Mass of the product represents measurable weight of all components this product consists of, such as optics, mechanics and electronics. Weight of Image Intensifier tubes may vary depending on the type and make of Image Intensifier tube being used and therefore is listed separately. Dimensions of the product represents measurable size of the body, including all optical components attached and in fully folded position. Dimensions of additions such as mounting brackets, eyecups, objective lens covers, and/or battery extensions may vary and therefore are not listed herein. Copyright © 1992-2020 General Starlight Co., Inc. Canada. All rights reserved.



ADVANCED PHOTONICS
TACTICAL THERMAL
WEAPON SIGHTS

TI-GEAR-S625

Every TI-GEAR-S625 Sight can be used in 3 main configurations



Hand-Held

Removing Weapon Mount is not necessary



Standalone Sight



Clip-On (In-Line) Sight

*Clip-On Adapter Required, Scope Adapter
Optional (Configuration-Dependent)*



Designed, Developed, Manufactured by GENERAL STARLIGHT COMPANY INC.
120 WHITMORE ROAD, UNIT 20, WOODBRIDGE, ONTARIO, L4L6A5, CANADA
WWW.GSCI1.COM | GSCI@GSCI1.COM | +1.905.850.0990

DISCLAIMER. Technical description, certain optical-electronic-mechanical features of the product shown herein and/or some of its parts/components may not precisely represent the actual device and are subject to change without prior notice by the sole discretion of General Starlight Company, Inc. Mass of the product represents measurable weight of all components this product consists of, such as optics, mechanics and electronics. Weight of Image Intensifier tubes may vary depending on the type and make of Image Intensifier tube being used and therefore is listed separately. Dimensions of the product represents measurable size of the body, including all optical components attached and in fully folded position. Dimensions of additions such as mounting brackets, eyecups, objective lens covers, and/or battery extensions may vary and therefore are not listed herein. Copyright © 1992-2020 General Starlight Co., Inc. Canada. All rights reserved.



ADVANCED PHOTONICS
TACTICAL THERMAL
WEAPON SIGHTS
TI-GEAR-S625

TI-GEAR-S625 TECHNICAL DATA

Optical Magnification	1X
Objective Lens System	25mm, f/1.0
Field of View	24.5°x18.5°
Focusing Range	0.5m .. Infinity
Diopter Adjustment Range	-6 .. +4
Eyereief	Min. 50mm
FPA Type	Uncooled, a-Si, Shutterless, Silent, Auto-NUC (Uninterrupted Operation)
FPA Resolution and Pitch	640X480, 17µm
FPA Sensitivity (NETD)	<50mK
FPA Refresh Rate	50Hz
Digital Zoom	1X, 2X, 4X
Internal Display	Full Size: 0.6-Inch Diagonal, AMOLED, Colour, 800x600
Imaging Modes	Monochrome (White-Hot / Black-Hot) and Multiple Colour Palettes
Built-In Laser Pointer	User's Choice: No Pointer, 665nm Pointer or 850nm Pointer
Shot-Initiated FOV Feature (SIF)	Built-In Adjustable Shock Sensor
Digital Passive Stadiametric Rangefinder (SRF)	Yes
Digital Detail Enhancement Feature (DDE)	Yes: 7 Levels
Digital Edge Detection Feature (DED)	Yes
Wide Dynamic Range Feature (WDR)	Yes
Stow Safety Feature (SSF)	Yes
Integrated 9-Axis Absolute Orientation HUD (Heads-Up Display) Integrated Compass Pitch / Roll / Azimuth Indications	Optional: 3-Axis Sensors - Magnetometer, Accelerometer and Gyroscope
Real-Time Date-Time Stamp	Yes: Simplified, Extended, DTG Formats
Digital Video Recorder with Real-Time Stamp	Optional: Comes with removable 32GB microSD card
Electronic Reticles	8+8 Patterns, Easy Zeroing / Calibration
Detection Capability: Man (1.7x0.5m) / NATO Target (2.3x2.3m)	830m / 1130m
Hand-Held Capability	Yes: Tripod-Mountable + Helmet-Mountable (Weapon mount has to be removed)
Conversion to Clip-On (In-Line) Sight	Yes
User Profiles (Configurable)	Yes: 8
Automatic/Manual Pixel Masking	Yes
Reset to Factory Defaults	Yes
External Video Feed Protection	Yes
Automatic Power Down Control	User-Configurable: 10 .. 60 minutes of inactivity
Accepted Batteries	2 (two) CR123 of Any Type: Lithium / Rechargeable
Universal Port	Video-Out, Remote Control and External Power (4VDC .. 15VDC)
Battery Life on 2x CR123	Up to 7 Hours
Environmental Protection	Fully Waterproof
Dimensions	140 x 60 x 60 mm
Weight	365 grams
Operating Temperature	-40°C .. +50°C
Warranty	7 Years, Limited
Export	Available Worldwide (Canadian Export Permit Required. GSCI provides assistance in obtaining the Permit)



ADVANCED PHOTONICS
TACTICAL THERMAL
WEAPON SIGHTS

TI-GEAR-S625

STANDARD EQUIPMENT

1	Thermal Sight
2	Built-In Laser (User's Choice): No Laser, 655nm or 850nm
3	Long Eyerelief Rubber Eyecup (<i>Installed on the device</i>)
4	Protective Lens Cover (<i>Installed on the device</i>)
5	USB Power Cable (<i>5-pin to USB</i>)
6	Video-Out Cable (<i>5-pin to RCA</i>)
7	Demist Shield
8	Low Profile Firearm Mount: Compact DQRM, Standard ARMS or Adjustable DLM
9	CR123 Battery (2pcs)
10	Soft Carrying Pouch
11	User Manual
12	7-Year Warranty with Activation Form
13	Quick Reference Card
14	Waterproof Hard Carrying Case

OPTIONAL EQUIPMENT

A	J-Arm Adapter Interface - Adjustable Dovetail Type
B	Interchangeable Clip-On Adapter with Shroud
C	Advanced Flip-Up Helmet Mount HM-714XM-SR: Shroud-Ready Mount
D	Advanced Flip-Up Helmet Mount HM-714XM-C: Shroud Ready Mount + Helmet Straps
E	Advanced Low-Profile Flip-Up Helmet Mount HM-714LP-SR: Shroud-Ready Mount. Adjustable Socket.
F	Advanced Low-Profile Flip-Up Helmet Mount HM-714XM-C: Shroud-Ready Mount + Helmet Straps.
G	Built-In Video Recorder (comes with 32GB microSD card and SD adapter)
H	External Video Recorder (comes with 32GB SD card, set of connection cables)
I	Remote Control Unit (comes with 5-pin to 5-pin cable)
J	Tactical Display Unit HMD-800 Series
K	MAK Firearm Mount with Adapter: MAK Picatinny or MAK Blaser
L	Recoil Absorbing System RMS-50
M	Scope Clamp Adapter
N	Multi-Voltage Battery Pack MVP-240

Distributed by www.GoThermal.co.za

TeleEye (South Africa) / GoThermal

Unit 4, 4 Homestead Ave. Bryanston, Johannesburg, South Africa

Tel: (+27) 11 557 9200 | e-mail: Sales@GoThermal.co.za



DISCLAIMER. Technical description, certain optical-electronic-mechanical features of the product shown herein and/or some of its parts/components may not precisely represent the actual device and are subject to change without prior notice by the sole discretion of General Starlight Company, Inc. Mass of the product represents measurable weight of all components this product consists of, such as optics, mechanics and electronics. Weight of Image Intensifier tubes may vary depending on the type and make of Image Intensifier tube being used and therefore is listed separately. Dimensions of the product represents measurable size of the body, including all optical components attached and in fully folded position. Dimensions of additions such as mounting brackets, eyecups, objective lens covers, and/or battery extensions may vary and therefore are not listed herein. Copyright © 1992-2020 General Starlight Co., Inc. Canada. All rights reserved.