

Hawk - 3 lever mechanism Hornbill - 3 lever mechanism Swift - 3 lever mechanism Sparrow - 3 lever mechanism



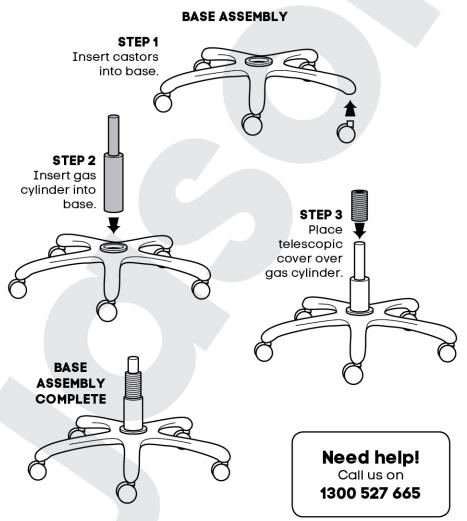


BACK ASSEMBLY

STEP 4Leave elastic in place. This keeps the two sections of the back bellow in place.




STEP 5Identify the stem of the chair back.




STEP 6

Insert the stem firmly into mechanism at the back of the seat unit. Push all the way until the back bottoms out. The ratchet height adjustor works like a car head rest. Press all the way down then lift to required position.



When back is in place, remove elastic band.

BACK ASSEMBLY COMPLETE

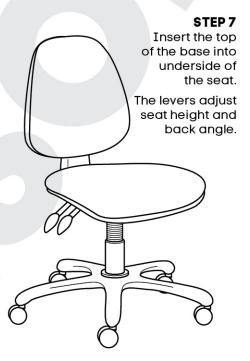



www.jasonl.com.au