





Drafting Base Assembly




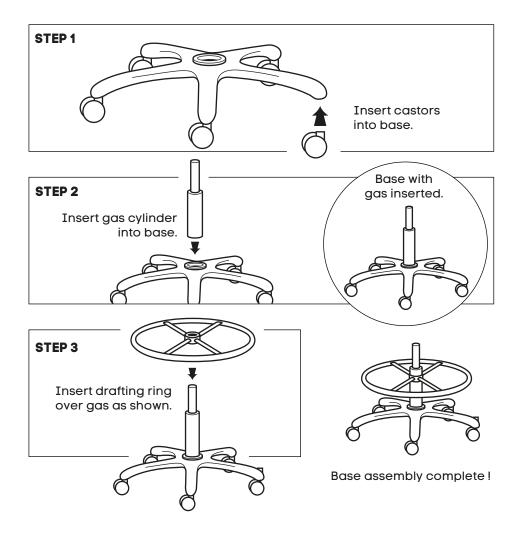

Back Assembly

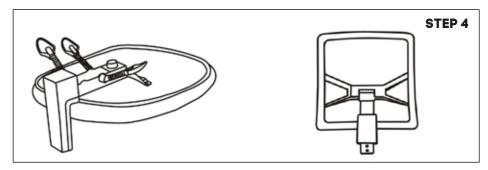

Identify the stem of the chair back inside the square back bellow



Insert the stem firmly into mechanism at the back bottoms out. Therachet height adjustor works like a car head rest. Press all the way down then lift to required position. When back is in place, remove elastic band.





Assembly Done

The levelers adjust seat height and back angle.




Height adjustable arms Assembly






Adjustable arm and armpad comes assembled



Tip chair seat upside down. Rest seat on corner of a table. Attach arm to chair seat using B spacer on the one hole each left and right arm.



Attach arm using 6 x M6*35mm (3 on the left armand 3 on the right arm). Tighten screws all the way down into the chair seat.