www.jasonl.com.au

**Need help!** 

Call us on 1300 527 665



#### Sizes:

2400L x 700D mm

2800L x 700D mm


3200L x 700D mm

3600L x 700D mm

2400L x 1200D mm

3000L x 1200D mm

3600L x 1200D mm

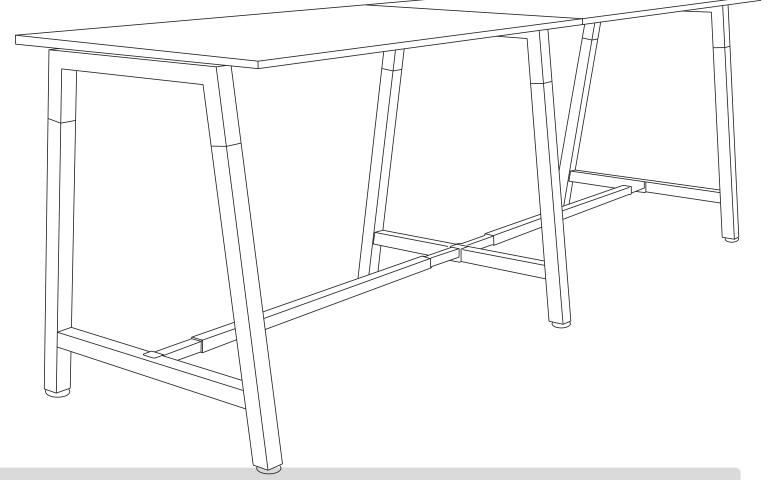

Tools Required: Power screwdriver; Allen key set (provided)



2 persons required for installation

### www.jasonl.com.au **ASSEMBLY INSTRUCTIONS** jason.l **Quadro Wood A leg Need help!** your office furniture mate Call us on **Counter table** 1300 527 665 with intermediate legs **COMPONENTS** A Table top x2 Leg Quadro A (Half leg cross beam) x2 Intermediate Leg Quadro A (Half leg cross beam) x1 Leg wood add on x6 Leg bottom beam x3 Upper beam x2 \* Lower beam x2 Plastic bracket x8 Feets or Wheels x6 \*\* **SCREWS** M8x20MM CSK x12 (D)M8x20MM socket head x4 M6x20MM socket head x8 M6x30MM socket head x8 Pins x4 Corner pads x6 Mushroom head M6x30 x6

- \* Colour of the beam is always black, regardless desk frame colour.
- \*\* If you purchase with wheels option


Q Allen key x2

located on each exterior leg.

www.jasonl.com.au

### **Need help!**



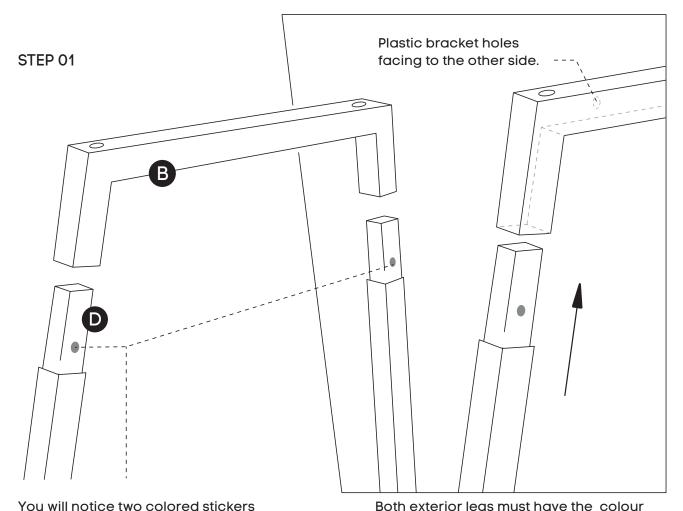

Insert the Leg wood add on **(D)** into the Leg Quadro A (Half leg) **(B)** and also intermediate leg **(C)**. Using Allen Key provided, attach mushroom head screws **(P)** for all legs.


www.jasonl.com.au

**Need help!** 


Call us on **1300 527 665** 



STEP 02

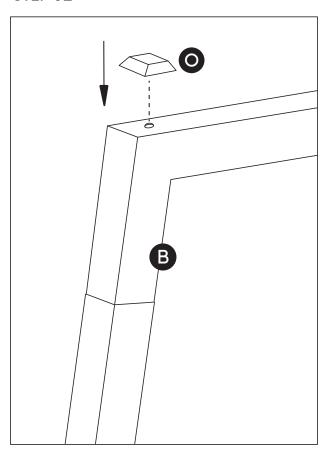


Now use corner pads (O) to cover the holes where just inserted the head screw sockets.

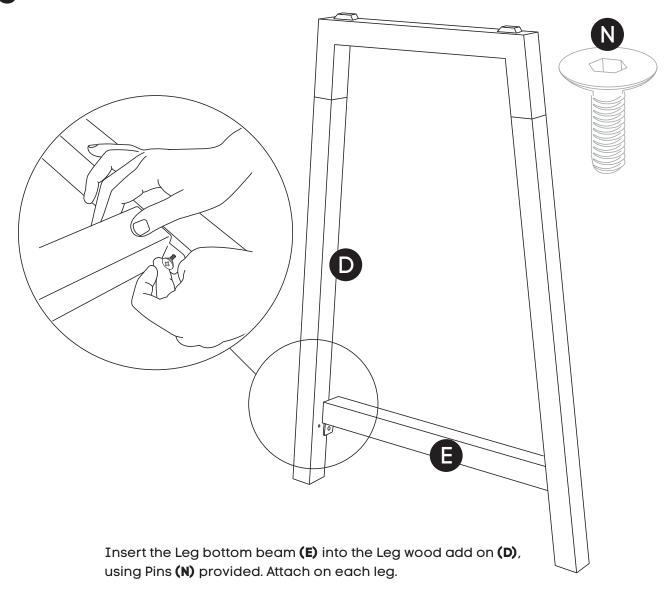


### www.jasonl.com.au

### Need help!




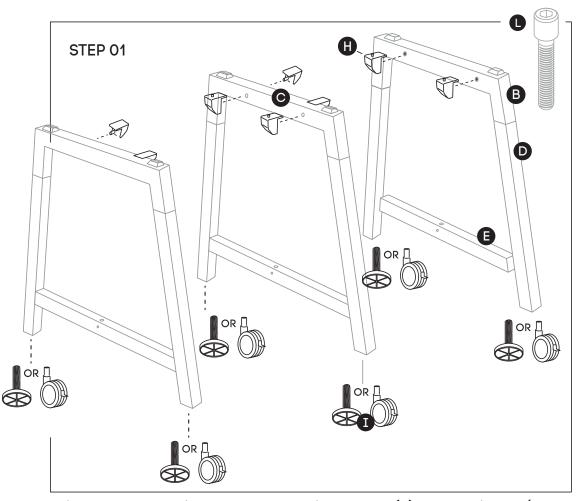

Using Allen Key provided, attach 2 plastic brackets (H) per exterior leg (as per picture above) using M6x20MM (L) Socket head screw. Attach 4 plastic brackets (H) to the Intermediate leg (C) using M6x20MM (L). Screw the feets or wheels (if you purchase with wheels option) (I) to the bottom of each Leg wood add on (D).

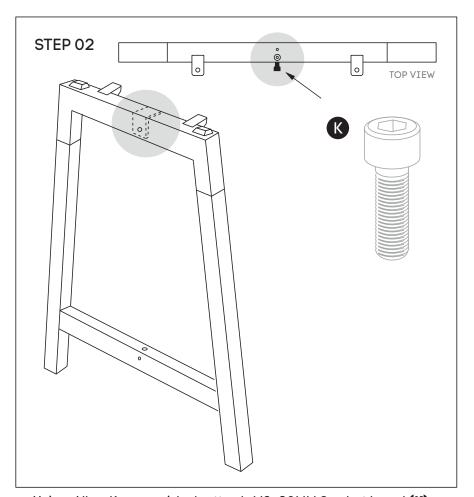


Using Allen Key provided, attach M8x20MM Socket head **(K)**-screw socket half way into legs.

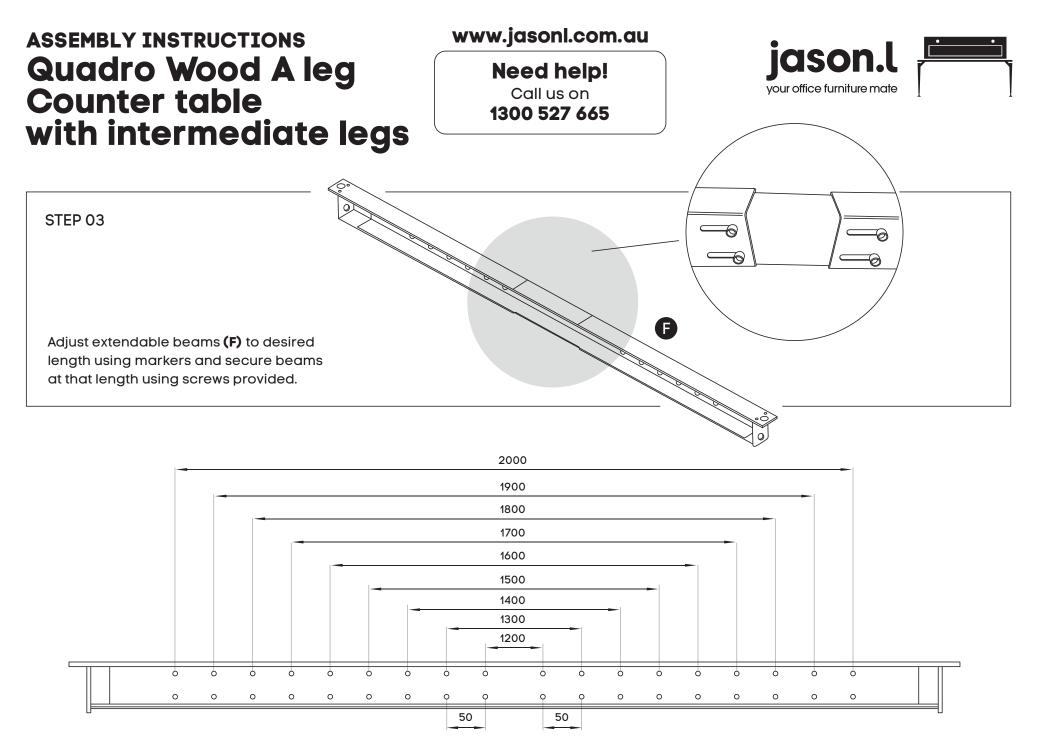

www.jasonl.com.au

Need help!




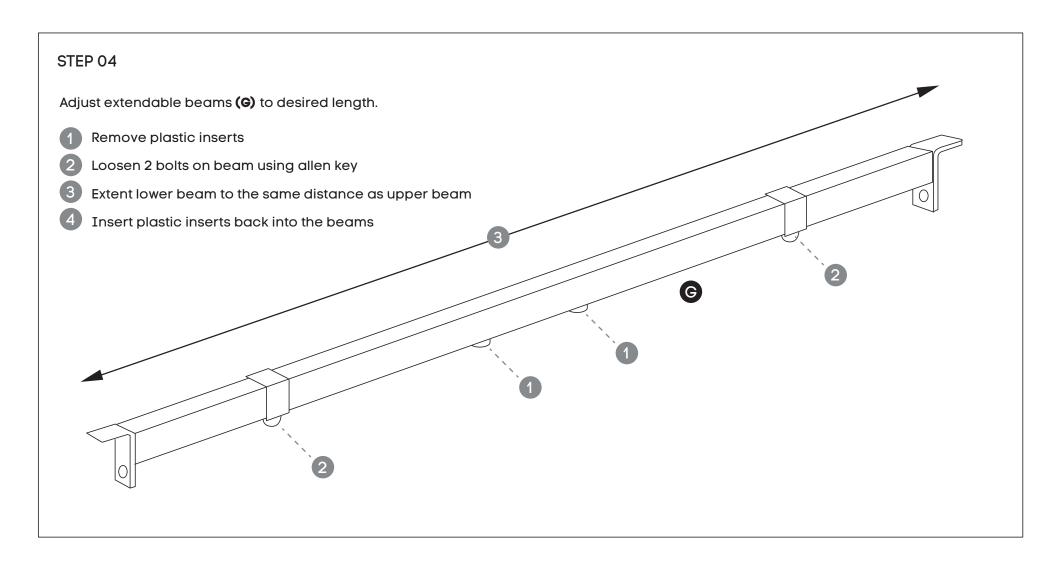


www.jasonl.com.au

Need help!



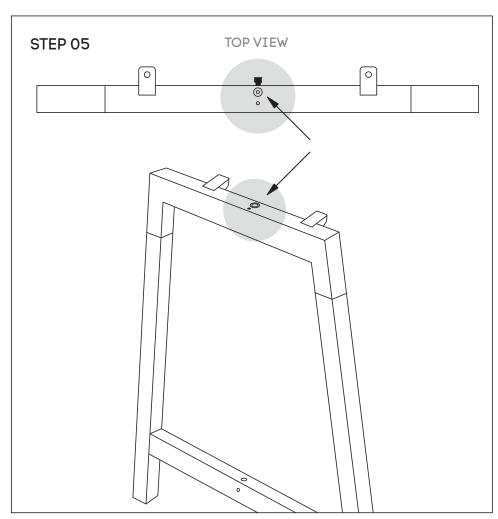

Attach Upper Beams **(F)** to legs using nut insert. See point attached

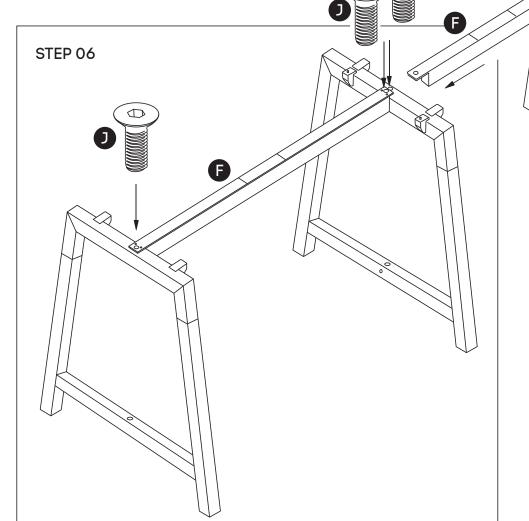


Frame looks like this. Using Allen Key, attach Upper Beams **(F)** with Sockets **(J)**.


www.jasonl.com.au

### Need help!

Call us on **1300 527 665** 



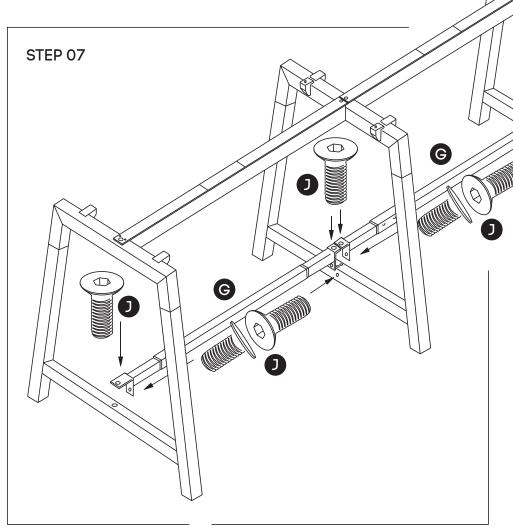

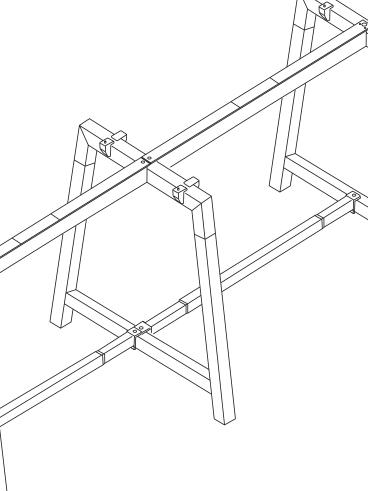

Frame looks like this.

Using Allen Key. Tighen Sockets (J) on the Lower Beam (G) using Allen Key (Q). Insert plastic spacers to improve regidity. Attach two Sockets (J) to the side of the lower side beams (as shown in the picture).

www.jasonl.com.au

Need help!



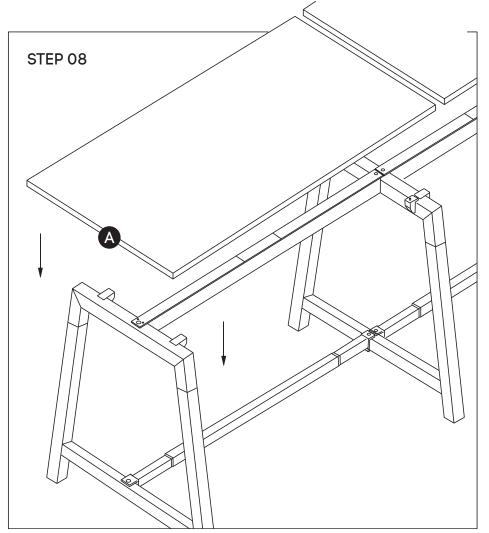




TABLE TOP BOTTOM VIEW



Place desktops (A) ontop of frames. Nut inserts in top will align with plastic joiner brackets using M6x30MM (M) sockets attached tops to frames.