


Tractor Stool

Need help?

Call us on
1300 527 665

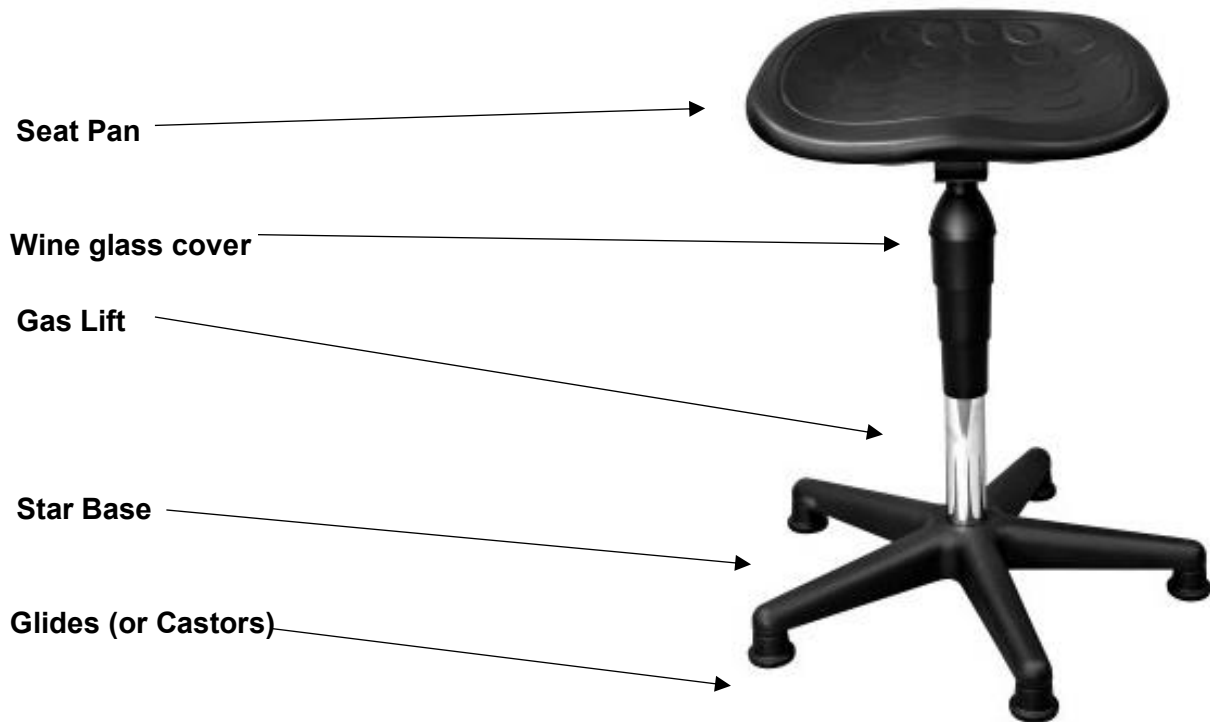

1. Components.

The Tractor Stool breaks down into the following component groups:

- Star base x1
 - Castors or glides x5
 - Wine glass cover x1
 - Gas lift x1
 - Seat pan with fixed adjustment mechanism x1
2. Begin assembly by inserting 5 glides, castors or trumpet base (as supplied) into the star base by pushing each of the castor/glide/trumpet metal pinions into underside of star base.
 3. Turn star base right side up and insert gas lift & wine glass cover into centre of star base.
 4. Place seat pan on top of gas lift ensuring gas lift tip fits into seat pan mechanism.
 5. Test under seat levers for height adjustment and tilt.

Need help?

Call us on
1300 527 665

