

# Multi-purpose gas leak detector with explosion protection (ATEX)

testo 316-2-EX

---

Just one instrument for fuel gases and refrigerants (e.g. for heat pumps), without changing the sensor

---

ATEX (EU/EFTA) certification

---

Acoustic and visual alarm via multi-colour LED on the sensor head

---

Display of ppm / vol% / %LEL / g/a on the instrument

---

Connection to testo Smart App for display of readings and documentation

---

Sensor self-test and automatic zeroing

---

Fine mode for precise detection of leaks

---

Auto-identification of the most common gas types

---




Illustration may differ from original

The ultimate professional instrument featuring the world's first 2-in-1 sensor for gas fittings and heat pumps – perfect if you deal with fuel gases and refrigerants. Also offers all premium functions like 316-1-EX including explosion protection (ATEX), fine mode and auto-identification of the most common gas types.

## Key benefits:

1. Multi-colour LED (visual and acoustic alarm)
2. Flexible measuring probe for locations that are difficult to access
3. Connection to testo Smart App for documentation and ppm display
4. Rechargeable battery
5. ATEX certification (EU/EFTA)
6. Expert functions: Fine mode for precise leak detection and auto-identification of the most common gas types
7. World's first 2-in-1 sensor for fuel gases and refrigerants (e.g. for heat pumps), for leak detection with no change of sensor

# Technical data/accessories

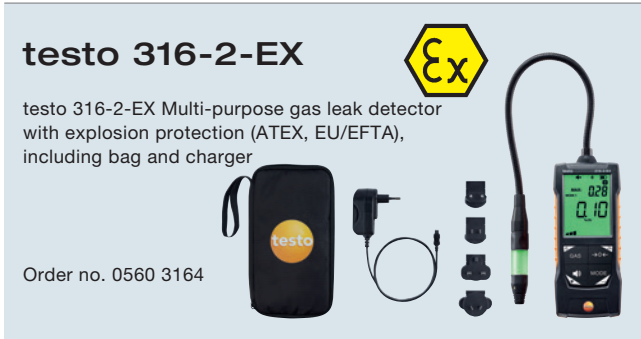

## testo 316-2-EX

testo 316-2-EX Multi-purpose gas leak detector with explosion protection (ATEX, EU/EFTA), including bag and charger

Order no. 0560 3164

Measuring instrument accessories	Order no.
Bag 	0590 0018
Interchangeable sensor head	0393 3164

### Detectable gases:

Methane / CH<sub>4</sub>  
 Propane / C<sub>3</sub>H<sub>8</sub>  
 Hydrogen / H<sub>2</sub>  
 Butane / C<sub>4</sub>H<sub>10</sub>  
 Tracer gas (H<sub>2</sub>)

### Refrigerant:

R1234yf  
 R134A  
 R404A  
 R407C  
 R410A  
 R41234ze  
 R290  
 R417A  
 R513A  
 R32  
 R449A  
 R22

Measurement parameters	ppm, vol.%, %LEL, g/a
Detectable gases	Methane, propane, hydrogen, butane, forming gas (H <sub>2</sub> )
Refrigerant	R1234yf, R134A, R404A, R407C, R410A, R1234ze, R290, R417A, R513A, R32, R449A, R22
Lower response threshold/measuring range	Methane (CH <sub>4</sub> ): 1 ppm to 4.0 vol.% Propane (C <sub>3</sub> H <sub>8</sub> ): 1 ppm to 1.9 vol.% Hydrogen (H <sub>2</sub> ): 1 ppm to 4.0 vol.% Butane (C <sub>4</sub> H <sub>10</sub> ): 1 ppm to 1.5 vol.% Refrigerant: lower response threshold (detection limit): 3 g/year
Resolution	1 ppm 0.01 VOL% 1% LEL
Response time	Response time < 2 sec
Leak alarm	3-colour LED on sensor head 3-colour display backlight Acoustic App

### General technical data

Operating temperature	-5 to +50 °C
Operating humidity	0 to 80 %RH
Storage temperature	-20 to +50 °C
Charging temperature	-5 to +45 °C
Battery type	Rechargeable battery USB charger (standard) with connection via microB
Battery life	>10 h
Dimensions	150 x 66.5 x 37.5 mm (L x W x H) Length with gooseneck arm 545 mm
Weight	425 g
EX-protection	ATEX II 2 G Ex ib IIC T1 Gb

1981 7164/dk/TT/06.2022

Subject to change, including technical modifications.